

DESCRIPTION

The EV2313-J-00A is an evaluation board for MP2313, a high frequency, synchronous, rectified, step-down converter with built-in Power MOSFETs. The MP2313 offers a very compact solution to achieve 1A continuous output current with excellent load and line regulation over a wide input supply range.

Current-mode operation provides fast transient response and eases loop stabilization.

Full protection features include over-current protection and thermal shutdown.

The MP2313 requires a minimum number of readily available standard external components and is available in a space saving TSOT23-8 package.

ELECTRICAL SPECIFICATION (1)

| Parameter | Symbol | Value | Units |
|----------------|-----------|-------|-------|
| Input Voltage | V_{IN} | 19 | V |
| Output Voltage | V_{OUT} | 3.3 | V |
| Output Current | I_{OUT} | 1 | A |

1). For different input, output spec, please refer to TYPICAL APPLICATION CIRCUIT section on datasheet to choose proper parameters.

FEATURES

- 1A Continuous Load Current
- 110mΩ/50mΩ Low $R_{DS(ON)}$ Internal Power MOSFETs
- Fixed 2MHz Switching Frequency
- High Efficiency Synchronous Mode Operation
- External AAM pin for Power-Save Mode Programming
- Internal Soft-Start
- Cycle-by-Cycle Over Current Protection
- Short Circuit Protection with Hiccup Mode
- Thermal Shutdown
- Output Adjustable from 0.8V
- Available in a TSOT23-8 Package

APPLICATIONS

- Notebook System and I/O Power
- Digital Set-Top Boxes
- Flat-Panel Television and Monitors

All MPS parts are lead-free and adhere to the RoHS directive. For MPS green status, please visit MPS website under Products, Quality Assurance page.

"MPS" and "The Future of Analog IC Technology" are registered trademarks of Monolithic Power Systems, Inc.

EV2313-J-00A EVALUATION BOARD




| Board Number | MPS IC Number |
|--------------|---------------|
| EV2313-J-00A | MP2313GJ |

Efficiency vs. Output Current


$V_{OUT}=3.3V$, $L=1\mu H$, $I_{OUT}=0.01A$ to $1A$

$R_{AAM}=40.2k$ @ $V_{IN}=12V$ to $24V$,

$R_{AAM}=80.6k$ @ $V_{IN}=5V$

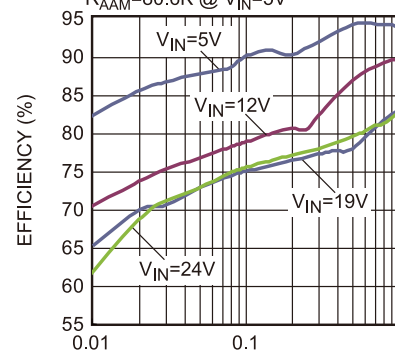

EVALUATION BOARD SCHEMATIC

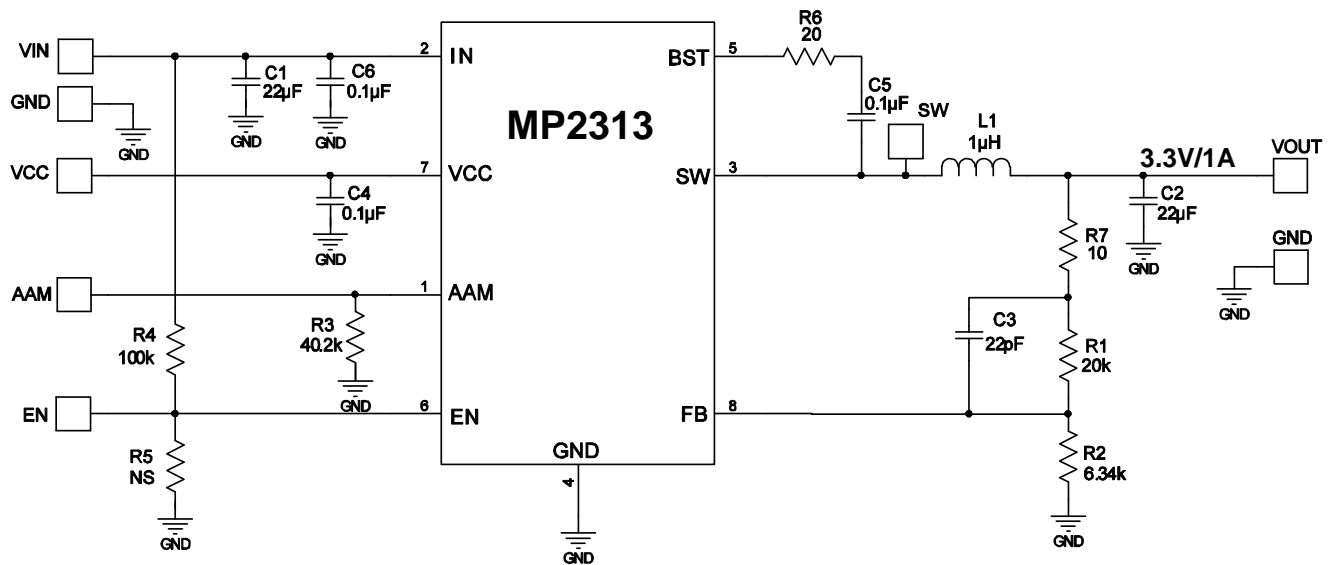

EV2313-J-00A BILL OF MATERIALS

| Qty | Ref | Value | Description | Package | Manufacturer | Manufacturer P/N |
|-----|-------|----------|---------------------------------|----------|--------------|--------------------|
| 1 | C1 | 22µF | Ceramic Cap,25V,X5R | 1206 | muRata | GRM31CR61E226KE15L |
| 1 | C2 | 22µF | Ceramic Cap,10V,X7R | 1206 | muRata | GRM31CR71A226KE15L |
| 1 | C3 | 22pF | Ceramic Cap,50V,C0G | 0603 | muRata | GRM1885C1H220JA01D |
| 2 | C4,C5 | 0.1µF | Ceramic Cap,16V,X7R | 0603 | muRata | GRM188R71C104KA01D |
| 1 | C6 | 0.1µF | Ceramic Cap,25V,X7R | 0603 | muRata | GRM188R71E104KA01D |
| 1 | R1 | 20k | Thick Film Res,1% | 0603 | ROYAL | RL0603FR-0720KL |
| 1 | R2 | 6.34k | Thick Film Res,1% | 0603 | ROYAL | RL0603FR-076K34L |
| 1 | R3 | 40.2k | Thick Film Res,1% | 0603 | ROYAL | RL0603FR-0740K2L |
| 1 | R4 | 100k | Thick Film Res,1% | 0603 | ROYAL | RL0603FR-07100KL |
| 1 | R5 | NS | | | | |
| 1 | R6 | 20Ω | Thick Film Res,1% | 0603 | ROYAL | RL0603FR-0720RL |
| 1 | R7 | 10Ω | Thick Film Res,1% | 0603 | ROYAL | RL0603FR-0710RL |
| 1 | L1 | 1µH | Inductor, DCR=8.4mΩ, Isat=10.2A | SMD | Würth | 744777001 |
| | | | Inductor,DCR=14mΩ Isat=5.26A | SMD | Sunlord | SWPA4030S1R0NT |
| 1 | U1 | MP2313GJ | Synchronous Step-Down Convert | TSOT23-8 | MPS | MP2313GJ |


EVB TEST RESULTS

Performance waveforms are tested on the evaluation board.

$V_{IN} = 19V$, $V_{OUT} = 3.3V$, $T_A = 25^\circ C$, unless otherwise noted.


Input/Output Ripple

$I_{OUT} = 0A$

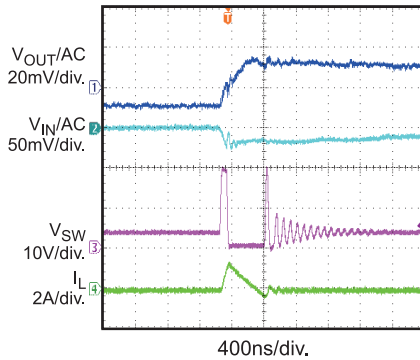


Input/Output Ripple

$I_{OUT} = 1A$

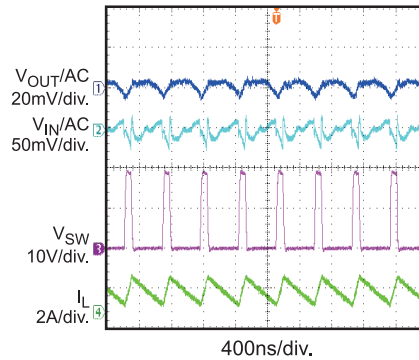


Startup through Input Voltage

$I_{OUT} = 0A$

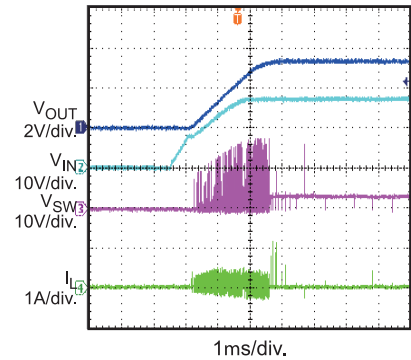


Startup through Input Voltage

$I_{OUT} = 1A$

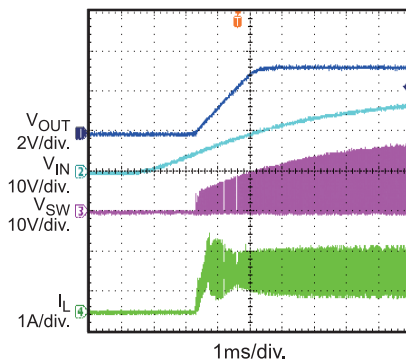


Shutdown through Input Voltage

$I_{OUT} = 0A$

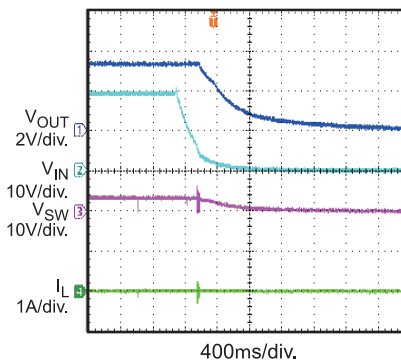


Shutdown through Input Voltage

$I_{OUT} = 1A$

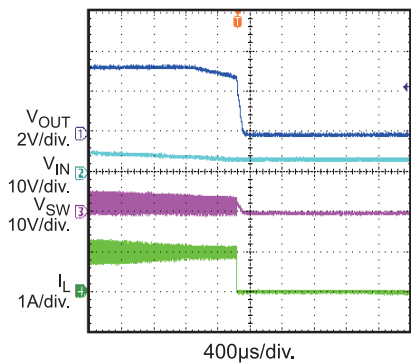


Startup through Enable

$I_{OUT} = 0A$

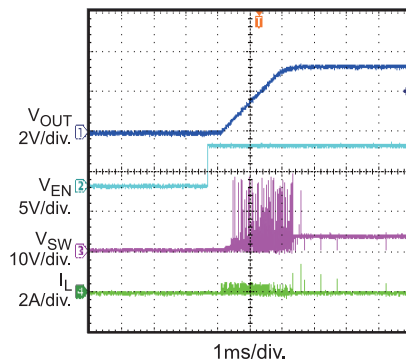


Startup through Enable

$I_{OUT} = 1A$

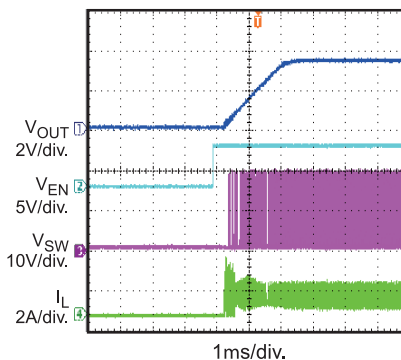

Shutdown through Enable

$I_{OUT} = 0A$

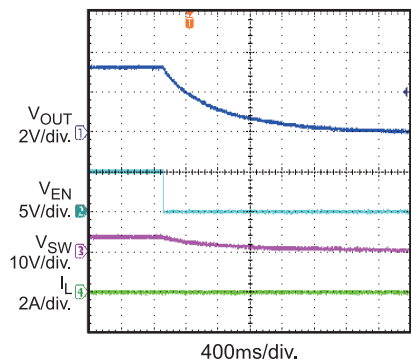


EVB TEST RESULTS *(continued)*

Performance waveforms are tested on the evaluation board.

$V_{IN} = 19V$, $V_{OUT} = 3.3V$, $T_A = 25^\circ C$, unless otherwise noted.


Shutdown through Enable

$I_{OUT} = 1A$

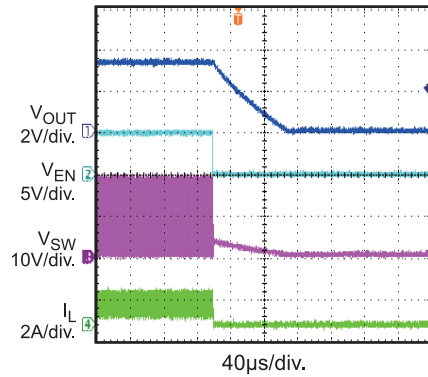


Short Circuit Entry

$I_{OUT} = 0A$

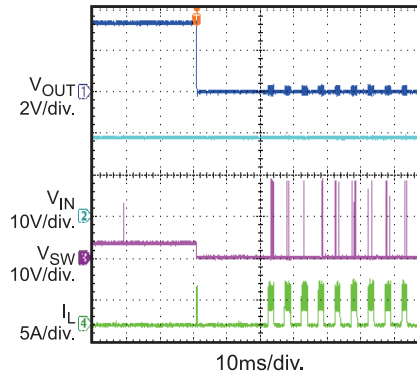


Short Circuit Recovery

$I_{OUT} = 0A$

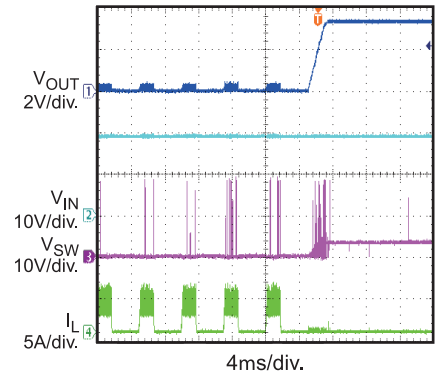


Short Circuit Steady

$I_{OUT} = 0A$

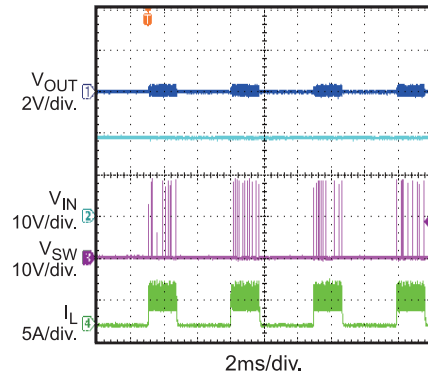

Load Transient

$I_{OUT} = 0.5A$ to $1A$, $2.5A/\mu s$

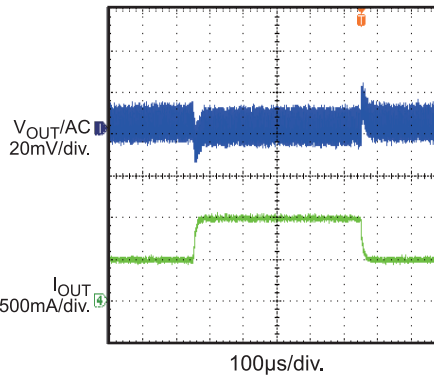

PRINTED CIRCUIT BOARD LAYOUT

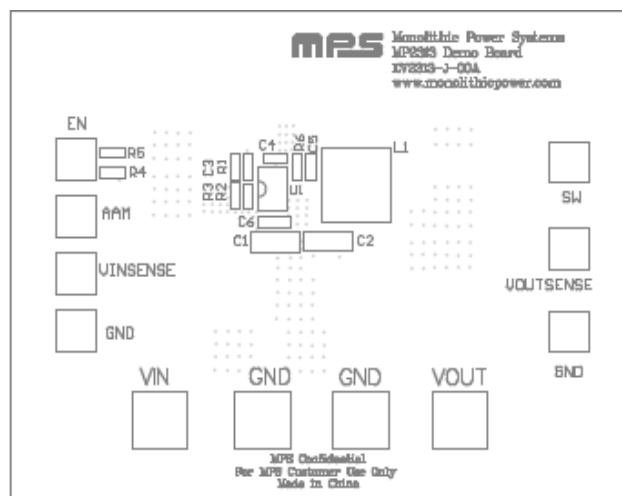


Figure 1—Top Silk Layer

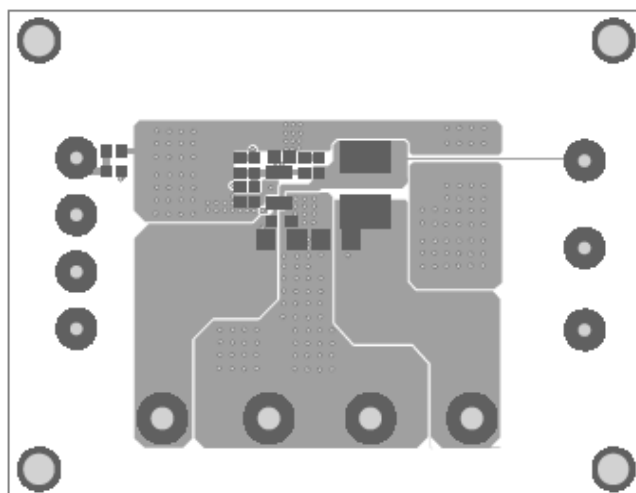


Figure 2—Top Layer

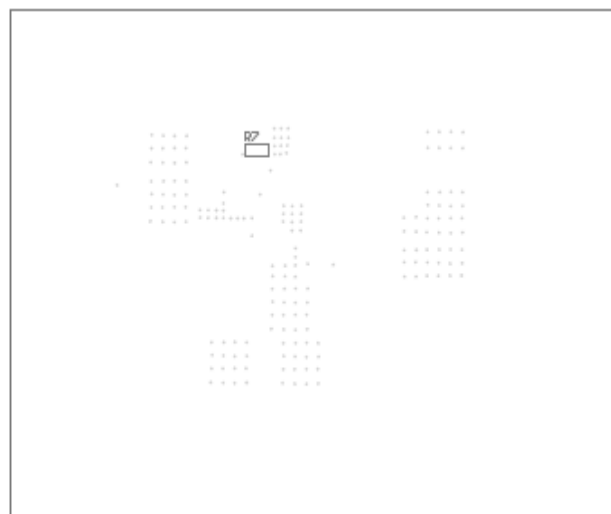


Figure 3—Bottom Silk Layer

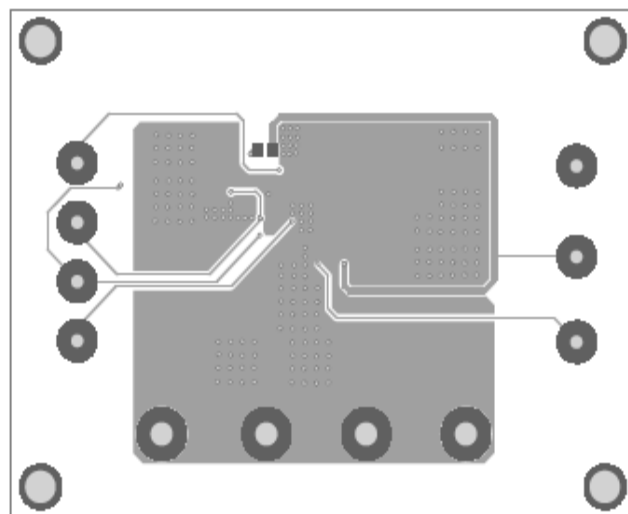


Figure 4—Bottom Layer

QUICK START GUIDE

1. Connect the positive and negative terminals of the load to the VOUT and GND pins, respectively.
2. Preset the power supply output between 4.5V and 24V, and then turn off the power supply.
3. Connect the positive and negative terminals of the power supply output to the VIN and GND pins, respectively.
4. Turn the power supply on. The board will automatically start up.
5. To use the Enable function, apply a digital input to the EN pin. Drive EN higher than 1.6V to turn on the regulator, or less than 0.9V to turn it off.
6. Float AAM pin or drive AAM to a high level voltage to set MP2313 work at forced PWM mode.

NOTICE: The information in this document is subject to change without notice. Please contact MPS for current specifications. Users should warrant and guarantee that third party Intellectual Property rights are not infringed upon when integrating MPS products into any application. MPS will not assume any legal responsibility for any said applications.