

1104986

https://www.phoenixcontact.com/us/products/1104986

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Safe extension module with 4 safe analog inputs, 0 V ... 10 V; 0 mA or 4 mA ... 20 mA; TBUS interface, up to Cat. 4/PL e, SIL 3, plug-in Push-in terminal block, TBUS connector included

Product description

The configurable and individually scalable PSRmodular safety system is a flexible safety solution for monitoring your machine or system. The safe extension module provides the system with additional safe analog inputs.

Your advantages

- · Cost-effective safety solution with a high level of adaptability to individual requirements
- · Fast startup, thanks to easy hardware and software configuration
- · Machine downtimes minimized with comprehensive, easy-to-understand diagnostics
- · Tool-free and time-saving installation thanks to Push-in technology
- · Narrow housing width of just 22.6 mm
- Up to Cat. 4/PL e in accordance with ISO 13849-1, SIL 3 in accordance with EN IEC 62061, SIL 3 in accordance with IEC 61508
- Suitable for elevator applications in accordance with EN 81-20

Commercial data

Item number	1104986
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	DN02
Product key	DNA362
GTIN	4055626974804
Weight per piece (including packing)	196 g
Weight per piece (excluding packing)	145 g
Customs tariff number	85371098
Country of origin	IT



1104986

https://www.phoenixcontact.com/us/products/1104986

Technical data

Notes

Note on application	Only for industrial use
oduct properties	
Product type	Safety device
Application	Analog IN
Data management status	
Article revision	01
nsulation characteristics	
Protection class	III
-	
Fimes Response time	see user manual
Restart time	min. 5 s (Boot time)
restart unio	max. 10 s (Boot time)
ectrical properties	
Maximum power dissipation for nominal condition	2.76 W (with max. permissible load)
Nominal operating mode	100% operating factor
Interfaces	DIN rail TBUS for connection to the master module, supplied as standard
Air clearances and creepage distances	
Rated insulation voltage	250 V AC
Rated surge voltage/insulation	Basic insulation 4 kV between all current paths and housing
	Electrical isolation, 0.5 kV functional insulation between logic an analog inputs and between the analog inputs
Supply	
Supply Designation	A1/A2
	A1/A2 19.2 V DC 28.8 V DC
Designation	
Designation Rated control circuit supply voltage U _S	19.2 V DC 28.8 V DC
Designation Rated control circuit supply voltage U _S Rated control circuit supply voltage U _S	19.2 V DC 28.8 V DC 24 V DC -20 % / +20 % (external fuse, typically 6 A)
Designation Rated control circuit supply voltage U _S Rated control circuit supply voltage U _S	19.2 V DC 28.8 V DC 24 V DC -20 % / +20 % (external fuse, typically 6 A) typ. 82 mA (without sensor supply)
Designation Rated control circuit supply voltage U _S Rated control circuit supply voltage U _S Rated control supply current I _S	19.2 V DC 28.8 V DC 24 V DC -20 % / +20 % (external fuse, typically 6 A) typ. 82 mA (without sensor supply) typ. 212 mA (with sensor supply)
Designation Rated control circuit supply voltage U _S Rated control circuit supply voltage U _S Rated control supply current I _S	19.2 V DC 28.8 V DC 24 V DC -20 % / +20 % (external fuse, typically 6 A) typ. 82 mA (without sensor supply) typ. 212 mA (with sensor supply) typ. 1.96 W (without sensor supply)
Designation Rated control circuit supply voltage U _S Rated control circuit supply voltage U _S Rated control supply current I _S Power consumption at U _S	19.2 V DC 28.8 V DC 24 V DC -20 % / +20 % (external fuse, typically 6 A) typ. 82 mA (without sensor supply) typ. 212 mA (with sensor supply) typ. 1.96 W (without sensor supply) typ. 5.08 W (with sensor supply)

Input data



1104986

https://www.phoenixcontact.com/us/products/1104986

G	er	16	er	a

Protective circuit	Overload protection of the current inputs; Suppressor diode
alog	
Input name	IN S1, IN S2, IN S3, IN S4
Description of the input	Safety-oriented analog inputs, configurable as current or voltage inputs, galvanically isolated
Number of inputs	4
Connection technology	2-conductor, 3-conductor or 4-conductor (2-conductor sensor signal + 2-conductor sensor supply)
Note regarding the connection technology	shielded
Scanning rate	2.5/5/10/16.6/20/50/60/100/200/400/800/1000/2000/4000 Hz
Current input signal	0 mA 25 mA (Measuring range)
	0 mA 20 mA (Configurable measuring range with diagnostics range 20.1 mA 23 mA)
	4 mA 20 mA (Configurable measuring range with diagnostics range 20.1 mA 23 mA (upper limit), 2.5 mA 3.8 mA (lower limit))
Voltage input signal	0 V 12 V (Measuring range)
	0 V 10 V (Configurable measuring range with diagnostics range 10.05 V 11.5 V (upper limit), 0.1 V (lower limit))
Max. permissible current	max. 35 mA (as current input)
Permissible voltage	max. 24 V (as current input)
	max. 14 V (as voltage input)
Input resistance current input	290 Ω ±25 % (incl. internal protective circuit)
Input resistance of voltage input	185 kΩ ±25 %
A/D converter resolution	16 bit
Resolution (current)	381 nA
Resolution (voltage)	152 μV
Precision	typ. ± 2 % (as current input, relative to the measuring range fin value)
	max. ± 2.5 % (as current input)
	typ. ± 1 % (as voltage input, relative to the measuring range fin value)
	max. ± 1.5 % (as voltage input)
Temperature coefficients	typ. ± 0.07 %/K
	max. ± 0.07 %/K
Limit frequency (3 dB)	160 Hz (RC low pass, 1st order, as current input)
	4 Hz (RC low pass, as voltage input)
Frequency	12 Hz (max. recommended sensor signal frequency, as curren input)
	2 Hz (max. recommended sensor signal frequency, as voltage input)
Permissible cable length	max. 100 m (per input)
Protective circuit	Overload protection of the current inputs
	Overload protection of the voltage inputs



1104986

https://www.phoenixcontact.com/us/products/1104986

Output data

Sensor supply:	OUT S1/0V	OUT S4/0V
----------------	-----------	-----------

Description	Sensor supply voltage per analog input
Supply voltage	24 V DC ±3 %
Current	max. 30 mA (Sensor current recording per channel)
Short-circuit-proof	yes
Protective circuit	Overload protection Overload detection at ≥ 38 mA

Connection data

Connection technology

pluggable	yes
Conductor connection	
Connection method	Push-in connection
Conductor cross section rigid	0.2 mm² 2.5 mm²
Conductor cross section flexible	0.2 mm² 2.5 mm²
Conductor cross-section AWG	24 14
Stripping length	10 mm

Signaling

Status display	4 x LED (yellow, red)
Operating voltage display	1 x green LED

Dimensions

Width	22.61 mm
Height	107.74 mm
Depth	113.6 mm

Material specifications

Color (Housing)	yellow (RAL 1018)
Housing material	Polyamide PA non-reinforced

Characteristics

Safety	data

Stop category	0
---------------	---

Safety data: EN ISO 13849

Performance level (PL)	e (2-channel wiring)
	d (1-channel wiring)

Safety data: IEC 61508 - High-demand for 2-channel wiring

Safety Integrity Level (SIL)	3
------------------------------	---

Safety data: IEC 61508 - High-demand for 1-channel wiring



1104986

https://www.phoenixcontact.com/us/products/1104986

Safety Integrity Level (SIL)	2
Safety data: EN IEC 62061	
Safety Integrity Level (SIL)	3 (2-channel wiring)
	2 (1-channel wiring)

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Min. degree of protection of inst. location	IP54
Ambient temperature (operation)	-10 °C 55 °C (observe derating)
Ambient temperature (storage/transport)	-20 °C 85 °C
Maximum altitude	≤ 2000 m (Above sea level)
Max. permissible humidity (storage/transport)	95 % (non-condensing)
Max. permissible relative humidity (operation)	95 % (non-condensing)
Shock	10g for Δt = 16 ms (continuous shock, 1000 shocks in each space direction)
Vibration (operation)	10 Hz 150 Hz, 2g

Approvals

CE

Identification	CE-compliant

Mounting


Mounting type	DIN rail mounting
Assembly note	Observe derating
Mounting position	vertical or horizontal




1104986

https://www.phoenixcontact.com/us/products/1104986

Drawings

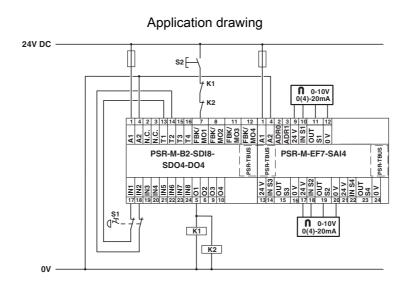

Example application



Block diagram



1104986

https://www.phoenixcontact.com/us/products/1104986

Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1104986



EAC

Approval ID: RU*-DE*B.00606/20



Functional Safety

Approval ID: Z10 029429 0013



1104986

https://www.phoenixcontact.com/us/products/1104986

Classifications

UNSPSC 21.0

ECLASS

ECLASS-11.0	27371819
ECLASS-13.0	27371819
ECLASS-12.0	27371819
ETIM	
ETIM 9.0	EC001449
UNSPSC	

39122200



1104986

https://www.phoenixcontact.com/us/products/1104986

Environmental product compliance

Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%



1104986

https://www.phoenixcontact.com/us/products/1104986

Accessories

CP-MSTB - Coding profile

1734634

https://www.phoenixcontact.com/us/products/1734634

Coding profile, is inserted into the slot on the plug or inverted header, red insulating material



CR-MSTB - Coding section

1734401

https://www.phoenixcontact.com/us/products/1734401

Coding section, inserted into the recess in the header or the inverted plug, red insulating material $% \left(1\right) =\left(1\right) \left(1\right) +\left(1\right) \left(1\right) \left(1\right) +\left(1\right) \left(1\right) \left(1\right) \left(1\right) +\left(1\right) \left(1\right$





1104986

https://www.phoenixcontact.com/us/products/1104986

CRIMPFOX 6 - Crimping pliers

1212034

https://www.phoenixcontact.com/us/products/1212034



Crimping pliers, for ferrules without insulating collar according to DIN 46228 Part 1 and ferrules with insulating collar according to DIN 46228 Part 4, $0.25~\text{mm}^2$... $6.0~\text{mm}^2$, lateral entry, trapezoidal crimp

EBP 2-5 - Insertion bridge

1733169

https://www.phoenixcontact.com/us/products/1733169

Insertion bridge for connectors with 5.0 mm or 5.08 mm pitch



Phoenix Contact 2024 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com