

PACT RCP-4000A-UIRO-PT-D190 - Current transformer

2906236
<https://www.phoenixcontact.com/us/products/2906236>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Set consisting of a 4-way signal conditioner with push-in connection technology and a Rogowski coil 600 mm in length/190 mm in diameter for AC current measurement on busbars and power lines.
The signal conditioner outputs 8 different standard signals on the output side and has one switching output.

Commercial data

Item number	2906236
Packing unit	1 pc
Sales key	C444
Product key	CK4A12
Catalog page	Page 223 (C-5-2019)
GTIN	4055626048345
Weight per piece (including packing)	447.3 g
Weight per piece (excluding packing)	420.1 g
Customs tariff number	85437090
Country of origin	DE

PACT RCP-4000A-UIRO-PT-D190 - Current transformer



2906236

<https://www.phoenixcontact.com/us/products/2906236>

Technical data

Product properties

Product type	Current transformer
Data management status	
Article revision	03
Insulation characteristics	
Overvoltage category	II
Pollution degree	2

Electrical properties

Electrical isolation	Reinforced insulation in accordance with IEC 61010-1
Typical measuring error	< 1 %
Protective circuit	Surge protection; 33 V suppressor diode
Step response (0–99%)	110 ms
Rated insulation voltage	300 V

Measuring coil

Conductor structure signal line	2x 0.22 mm (Signal (tinned)) 1x 0.22 mm (Shielding (tinned))
Insulation	double insulation
Rated insulation voltage	1000 V AC (rms CAT III) 600 V AC (rms CAT IV)
Test voltage	10.45 kV DC (60 s)
Basic accuracy	<± 0.2 %

Measuring transducers

Maximum transmission error	≤ 0.5 % (From the range end value)
Frequency range	16 Hz ... 1000 Hz
Test voltage	3 kV (50 Hz, 1 min.)

General

Can be calibrated	no
Class	1
Accuracy class	1
Converter type	Rogowski coil and 4-way signal conditioner

Supply: Measuring transducers

Nominal supply voltage	24 V DC
Nominal supply voltage range	9.6 V DC ... 30 V DC
Power consumption	≤ 1 W (at I _{OUT} = 20 mA, 9.6 V DC, 600 Ω load)

Input data

Frequency

PACT RCP-4000A-UIRO-PT-D190 - Current transformer



2906236

<https://www.phoenixcontact.com/us/products/2906236>

Designation	Measuring coil
Frequency measuring range	40 Hz ... 20000 Hz
Position error	<± 0.1 % (typical)
Linearity error	< 0.1 %

Signal

Input signal (at 50 Hz)	100 mV (1000 A)
Curve type	Sine
Input impedance	> 100 kΩ

Current transformer

Configurable/programmable	Via DIP switches
Rated frequency: Standard converter	40 Hz ... 20000 Hz
Primary rated current I_{pn}	0 A AC ... 100 A AC
	0 A AC ... 250 A AC
	0 A AC ... 400 A AC
	0 A AC ... 630 A AC
	0 A AC ... 1000 A AC
	0 A AC ... 1500 A AC
	0 A AC ... 2000 A AC
	0 A AC ... 4000 A AC
Can be calibrated	no
Class	1
Accuracy class	1
Converter type	Rogowski coil and 4-way signal conditioner

Output data

Switching: Transistor

Number of outputs	1
Contact switching type	1 N/O contact
Minimum switching voltage	1 V
Maximum switching voltage	30 V DC
Min. switching current	100 μA
Max. switching current	100 mA (at 30 V)

Signal

Designation	Measuring coil
Output signal (at 50 Hz)	100 mV (no load, at 1,000 A)
Output voltage (in no-load operation)	$V_{OUT} = M \cdot dI/dt$
Output voltage (sinusoidal, in no-load operation)	100 mV ($V_{OUT} = 2 \cdot \pi \cdot M \cdot f \cdot I$ (M = 0.318 μH; example: At 50 Hz; I = 1,000 A))
Accuracy class	1

Signal

Designation	Measuring transducer
Configurable/programmable	Yes

PACT RCP-4000A-UIRO-PT-D190 - Current transformer



2906236

<https://www.phoenixcontact.com/us/products/2906236>

Voltage output signal	0 V ... 10 V (via DIP switch)
	2 V ... 10 V (via DIP switch)
	0 V ... 5 V (via DIP switch)
	1 V ... 5 V (via DIP switch)
	0 V ... 10.5 V (can be set via software)
Max. voltage output signal	≈  V
Current output signal	0 mA ... 20 mA (via DIP switch)
	4 mA ... 20 mA (via DIP switch)
	0 mA ... 10 mA (via DIP switch)
	2 mA ... 10 mA (via DIP switch)
	0 mA ... 21 mA (can be set via software)
Max. current output signal	24.6 mA
Load/output load voltage output	≥ 10 kΩ
Load/output load current output	≤ 600 Ω (20 mA)
Ripple	< 20 mV _{PP}
	< 20 mV _{PP}

Connection data

Measuring transducer side

Connection method	Push-in connection
Stripping length	10 mm
Conductor cross section rigid	0.2 mm ² ... 2.5 mm ²
Conductor cross section flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross section AWG	26 ... 12

Dimensions

Item dimensions

Width	6.2 mm
Height	110.5 mm
Depth	120.5 mm

Measuring coil

Length	600 mm
Diameter	8.3 mm ±0.2 mm

Measuring coil when installed

Diameter	190 mm
----------	--------

Signal line

Length	3 m
Width	6.2 mm
Height	110.5 mm
Depth	120.5 mm

Material specifications

PACT RCP-4000A-UIRO-PT-D190 - Current transformer



2906236

<https://www.phoenixcontact.com/us/products/2906236>

Housing material	PC
	PBT
Coil material	Elastollan

Environmental and real-life conditions

Ambient conditions

Measuring coil degree of protection	IP67 (not assessed by UL)
Measuring transducer degree of protection	IP20
Ambient temperature (operation)	-30 °C ... 80 °C (Measuring coil)
	-40 °C ... 70 °C (Measuring transducer)
Ambient temperature (storage/transport)	-40 °C ... 80 °C (Measuring coil)
	-40 °C ... 85 °C (Measuring transducer)
Altitude	< 2000 m
Permissible humidity (operation)	5 % ... 95 % (non-condensing)

Approvals

CE

Certificate	CE-compliant
-------------	--------------

UKCA

Certificate	UKCA-compliant
-------------	----------------

CMIM

Certificate	CMIM-compliant
-------------	----------------

UL, USA/Canada

Identification	UL 61010 Recognized
Note	Measuring coil

UL, USA/Canada

Identification	UL 508 Listed
Note	Measuring transducer

EMC data

Noise immunity	EN 61000-6-2
Note	When being exposed to interference, there may be minimal deviations.
Electromagnetic compatibility	Conformance with EMC directive
Noise emission	EN 61000-6-4

Standards and regulations

Electrical isolation	Reinforced insulation in accordance with IEC 61010-1
Standards/regulations	IEC 61010-1
	IEC 61010-2-032

Mounting

PACT RCP-4000A-UIRO-PT-D190 - Current transformer



2906236
<https://www.phoenixcontact.com/us/products/2906236>

Mounting type	DIN rail mounting
---------------	-------------------

PACT RCP-4000A-UIRO-PT-D190 - Current transformer




2906236

<https://www.phoenixcontact.com/us/products/2906236>

Drawings

Block diagram

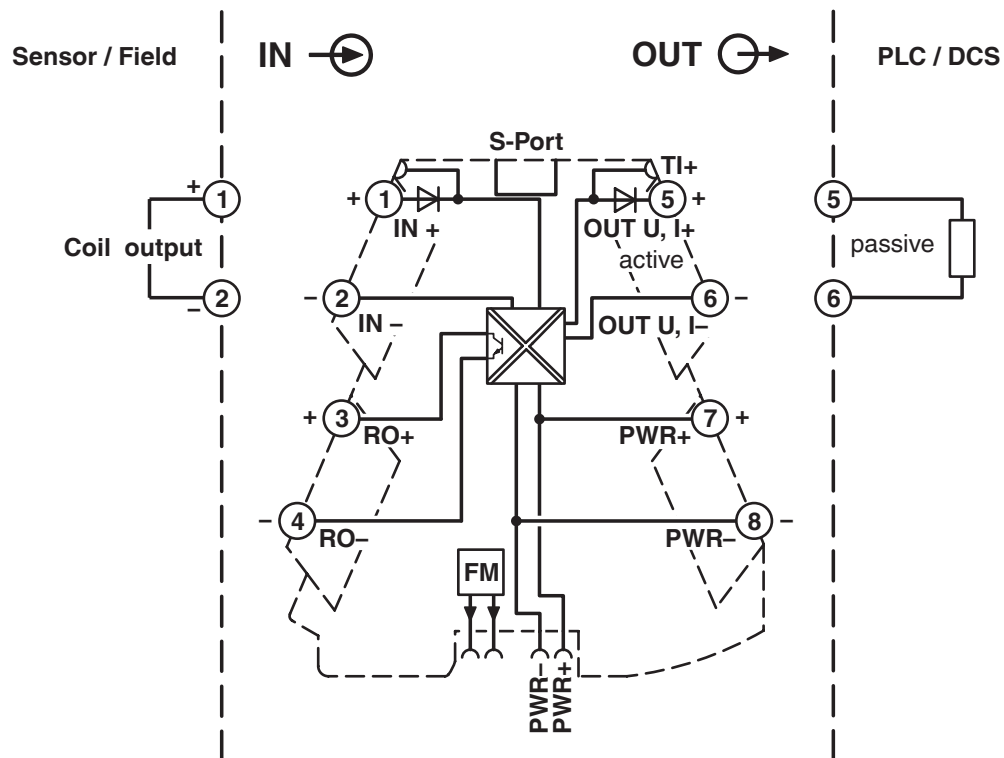

2906236
<https://www.phoenixcontact.com/us/products/2906236>

Classifications

ECLASS

ECLASS-11.0	27210902
ECLASS-13.0	27210902
ECLASS-12.0	27210902

ETIM

ETIM 8.0	EC002048
----------	----------

UNSPSC

UNSPSC 21.0	39121000
-------------	----------

2906236
<https://www.phoenixcontact.com/us/products/2906236>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes
Exemption	7(a), 7(c)-I
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
	2,2',6,6'-tetrabromo-4,4'-isopropylidenediphenol(CAS: 79-94-7)
SCIP	bbdf0fb4-b8c2-4f78-bb83-553a7d4440ba6

PACT RCP-4000A-UIRO-PT-D190 - Current transformer



2906236

<https://www.phoenixcontact.com/us/products/2906236>

Accessories

PACT RCP-CLAMP - Holder

2904895

<https://www.phoenixcontact.com/us/products/2904895>



The optional holding device ensures the Rogowski coil is securely seated on busbars with a thickness of 10 ... 15 mm. During installation, the coil housing is pushed onto the flange of the holding device and snaps in automatically.

PACT RCP-CLAMP-5-10 - Holder

2907888

<https://www.phoenixcontact.com/us/products/2907888>



The optional holding device ensures the Rogowski coil is securely seated on busbars that are 5 ... 10 mm thick. During installation, the coil housing is pushed onto the flange of the holding device and snaps in automatically.

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com