

USER MANUAL

CALYPSO FEATHERWING

2610039025001

VERSION 1.2

JUNE 12, 2023

WÜRTH ELEKTRONIK MORE THAN YOU EXPECT

MUST READ

Check for firmware updates

Before using the product make sure you use the most recent firmware version, data sheet and user manual. This is especially important for Wireless Connectivity products that were not purchased directly from Würth Elektronik eiSos. A firmware update on these respective products may be required.

We strongly recommend to include in the customer system design, the possibility for a firmware update of the product.

Revision history

Manual version	HW version	Notes	Date
1.0	1.1	Initial version	November 2020
1.1	1.2	<ul style="list-style-type: none">• Change of antenna connection chapter 3.4• Change of chapter 3.2.	February 2023
1.2	1.2	New corporate design	June 2023

Abbreviations

Abbreviation	Name	Description
CISPR	Comité International Spécial des Perturbations Radioélectriques	International Special Committee on Radio
EV	Evaluation	
ESD	Electro Static Discharge	
FOTA	Firmware over the update	
EMC	Electro Magnetic Compatibility	
GND	Ground	
HIGH	High signal level	
IDE	Integrated development environment	
IEC	International Electrotechnical Commission	
IEEE	Institute for electrical and electronic engineers	
JTAG	Joint Test Action Group	
LED	Light Emitting Diode	
Li-Po	Lithium-Polymer	
LOW	Low signal level	
PC	Personal Computer	
PCB	Printed Circuit Board	
VCC		Supply voltage
VDD	Voltage Drain Drain	Supply voltage

Contents

1	General description	5
1.1	Introduction	5
1.2	Block diagram	6
1.3	Contents	6
2	Functional description	7
2.1	Adafruit Feather	7
2.2	Calypso Wi-Fi module (2610011025000)	7
3	Hardware description	9
3.1	Connectors	9
3.1.1	Feather connector	9
3.2	Jumpers	10
3.2.1	JP2	10
3.2.2	JP3	11
3.3	Push buttons	11
3.3.1	S1	11
3.3.2	S2	12
3.4	Schematics	13
3.5	Layout	14
4	Software description	16
4.1	Software architecture	16
4.2	Installing the tools	17
4.2.1	IDE	17
4.2.2	Installation steps	18
4.3	Hardware Setup	18
4.4	Running the quick start example	18
5	Regulatory compliance information	20
5.1	Exemption clause	20
6	Important notes	21
6.1	General customer responsibility	21
6.2	Customer responsibility related to specific, in particular safety-relevant applications	21
6.3	Best care and attention	21
6.4	Customer support for product specifications	21
6.5	Product improvements	22
6.6	Product life cycle	22
6.7	Property rights	22
6.8	General terms and conditions	22
7	Legal notice	23
7.1	Exclusion of liability	23
7.2	Suitability in customer applications	23
7.3	Trademarks	23

7.4	Usage restriction	23
8	License terms	25
8.1	Limited license	25
8.2	Usage and obligations	25
8.3	Ownership	26
8.4	Firmware update(s)	26
8.5	Disclaimer of warranty	26
8.6	Limitation of liability	27
8.7	Applicable law and jurisdiction	27
8.8	Severability clause	27
8.9	Miscellaneous	27

1 General description

1.1 Introduction

The Würth Elektronik eiSos Calypso FeatherWing is a development board that offers a secure 2.4 GHz Wi-Fi connectivity solution. It is fully compatible to the popular Adafruit Feather line of development boards and extends the Feathers with Wi-Fi connectivity.

The Calypso FeatherWing consists of the Calypso radio module that offers Wi-Fi connectivity based on IEEE 802.11 b/g/n with a fully featured TCP/IP (IPv4 and IPv6) stack. With out-of-the-box support to commonly used network applications like SNMP, HTTP(S), MQTT(S) Calypso offers an easy and secure solution to any IoT application.

It has an AT-style command interface on the standard UART and hence can be connected to any of the Feather microcontroller boards. The Arduino (C/C++) drivers and examples (see chapter 4) made available makes it easy to build a prototype to kick-start the application development.

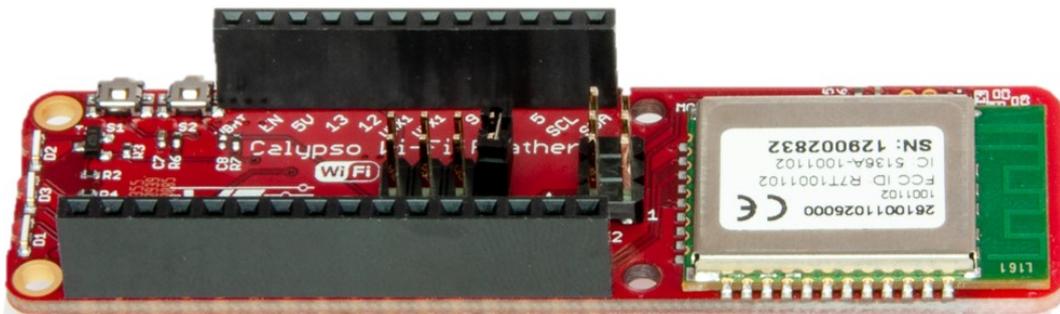


Figure 1: The WE Calypso FeatherWing (2610039025001)

1.2 Block diagram

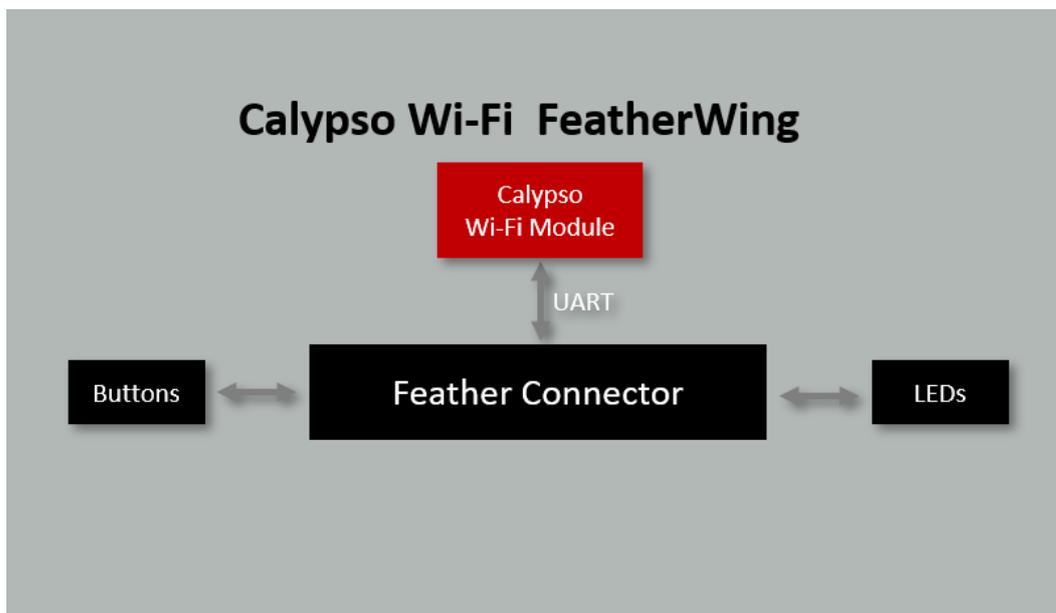


Figure 2: Block diagram - Calypso FeatherWing

1.3 Contents

Description	Quantity
WE Calypso FeatherWing	1
Packaging: ESD safe bag	1

Table 1: Contents 2610039025001

2 Functional description

The Calypso FeatherWing was designed with rapid prototyping in mind. Being fully compatible with the Adafruit ecosystem, this FeatherWing allows the user the flexibility to choose the preferred host microcontroller. The inherent modularity of the ecosystem allows the FeatherWing to be easily integrated into any project.

The next sections provide a brief introduction to Adafruit's Feather ecosystem and details on the Calypso Wi-Fi module.

Feel free to check our youtube channel:

www.youtube.com/user/WuerthElektronik/videos for video tutorials, hands-ons and webinars relating to our products.

2.1 Adafruit Feather

The Adafruit Feather ecosystem consists of two types of boards apart from a host of accessories:

- **Feather:** Adafruit Feathers are a complete line of development boards from Adafruit that are standalone and stackable. They can be powered either over the on-board micro-USB plugs or using a Li-Po battery. Feathers are portable, flexible and light as their namesake.
- **FeatherWing:** FeatherWings are stackable boards that when used along with a Feather add a certain functionality to the system.

The Feather system with more than 50+ Wings, several different types of accessories and arduino/circuit python based code support provides a perfect ecosystem for rapid prototyping. Please refer to adafruit.com/feather for more details on the Adafruit Feather ecosystem.

2.2 Calypso Wi-Fi module (2610011025000)

The Calypso Wi-Fi module is a compact Wi-Fi radio module based on IEEE 802.11 b/g/n with a fully featured TCP/IP stack. The edge castellated connections, smart antenna configuration and an easy-to-use AT-style command interface enable easy integration of the Calypso into any embedded application.

The module supports IPv4 as well as IPv6 and implements several commonly used network applications like SNTP, DHPv4, DHCPv6, mDNS, HTTP(S), MQTT(Secure) out-of-the-box. Advanced security features like up to 6 simultaneous secure sockets, secure boot, secure storage and secure OTA update provide a good basis for a secure end product.

Whether a serial cable replacement or low power IoT application with cloud connectivity, the Calypso Wi-Fi module offers a robust and standard compliant wireless connectivity solution for low-power and low-medium throughput applications.

Key features

In this section, the features of the Calypso module are summarized in the form of a table. Calypso offers the user to configure and exploit its rich features through an easy-to-use command interface over UART.

Feature	Description
Radio standards	IEEE 802.11 b/g/n station IEEE 802.11 b/g Access point (for provisioning only) Wi-Fi Direct client and group owner
Channels	1-13
Security	WEP, WPA/WPA2PSK, WPA2 Enterprise (802.1x)
Provisioning	In AP mode using the on-board HTTPS server
Network layer	IPv4, IPv6
IP addressing	Static, LLA, DHCPv4, DHCPv6 with DAD
Transport layer	TCP, UDP SSLv3.0/TLSv1.0/TLSv1.1/TLSv1.2 Up to 15 simultaneous sockets of which 6 can be secure.
Network applications	MQTT(Secure) client HTTP(S) client SNTP client HTTP(S) server mDNS, DNS-SD DHCP server Ping
Update	Secure FOTA update with fall back mechanism
Security	Secure key storage Trusted root-certificate catalog Encrypted file system Secure OTA Software tamper detection Cloning protection
Power management	802.11 power save power modes Lower power sleep mode with timed or pin wake-up

Table 2: Key features

Further details about Calypso Wi-Fi module can be found under we-online.com/catalog/en/CALYPSO

3 Hardware description

This sections contains a detailed description of the hardware features of the Calypso FeatherWing. The design files for this hardware can be downloaded from github.com/WE-eiSmart/FeatherWings-Hardware.

3.1 Connectors

3.1.1 Feather connector

This is the standard set of connectors that is used across the Feather ecosystem. The table below describes the functions of each of the 28 pins as applicable to this FeatherWing.

Pin Number	Pin name	Function
1	\overline{RST}	Not connected
2	3V3	3.3 V power supply
3	AREF	Not connected
4	GND	Ground
5	A0	Not connected
6	A1	(Optional) Calypso APP_MODE_0 pin via JP3
7	A2	(Optional) Calypso APP_MODE_1 pin via JP3
8	A3	Not connected
9	A4	Not connected
10	A5	Not connected
11	SCK	Not connected
12	MOSI	Not connected
13	MISO	Not connected
14	U0RX	Calypso UTXD pin
15	U0TX	Calypso URXD Pin
16	NC	Not connected

Pin Number	Pin name	Function
17	SDA	Not connected
18	SCL	Not connected
19	5	Not connected
20	6	(Optional) Calypso WAKE_UP pin via JP3
21	9	Not connected
22	U1TX	Not connected
23	U1RX	Not connected
24	12	(Optional) Switch S2 via JP3
25	13	Not connected
26	5 V	Not connected
27	EN	Not connected
28	VBAT	Not connected

3.2 Jumpers

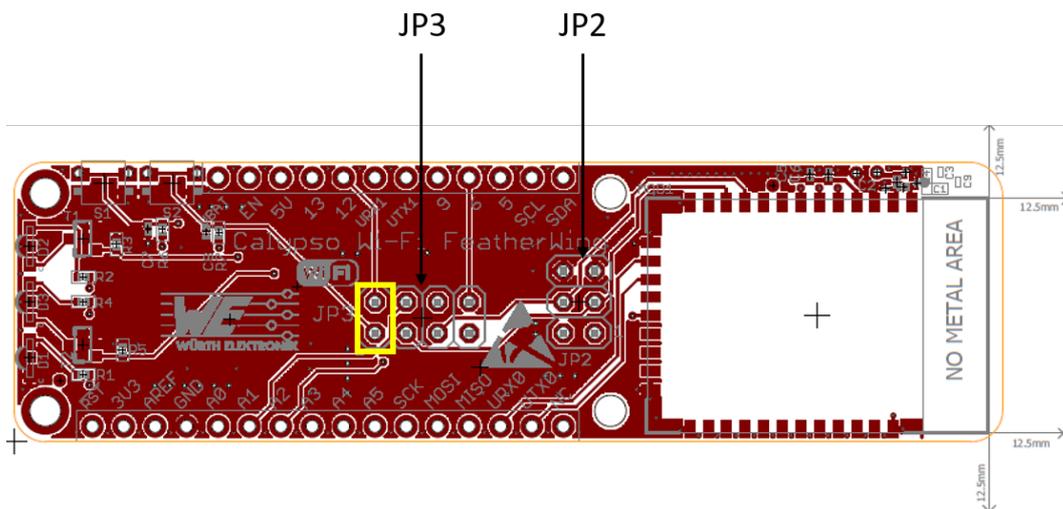


Figure 3: Jumpers and their default state

3.2.1 JP2

This jumper enables the user to start Calypso Wi-Fi module in different modes through the APP_MODE_0 and APP_MODE_1 pins. Table 4 briefly describes the different application modes of Calypso. Please refer to Section 5.2 of the Calypso user manual for further details. For normal operation in the standard AT-command mode, these jumpers do not need as the lines are pulled down internally.

JP2	Function	Jumper set (default)
1,3	APP_MODE_0 to HIGH	No
3,5	APP_MODE_0 to LOW	No
2,4	APP_MODE_1 to HIGH	No
4,6	APP_MODE_1 to LOW	No

Table 3: Jumper JP2

APP_MODE_0	APP_MODE_1	Mode
APP_MODE_1_module	APP_MODE_0_module	
0	0	AT command normal mode
0	1	FOTA mode
1	0	Provisioning mode
1	1	AT command terminal mode

Table 4: Calypso Application modes

APP_MODE_x means the labeling of the nets in the circuit of the evaluation board.
 APP_MODE_x_module means the pin name of the module corresponding to the Calypso documentation. The numbering is not consistent.

3.2.2 JP3

This jumper allows the connection of Calypso's pins APP_MODE_0, APP_MODE_1, WAKE_UP pins to the host microcontroller. Additionally, it allows the general purpose switch S2 to be connected to GPIO 6.

JP3	Function	Jumper set (default)
1,2	S2 to GPIO12	Yes
3,4	APP_MODE_0 to GPIOA1	No
5,6	APP_MODE_1 to GPIOA2	No
7,8	WAKE_UP to GPIO6	No

Table 5: Jumper JP3

3.3 Push buttons

3.3.1 S1

This push button is connected to the /RESET pin of the Calypso Wi-Fi module. Pressing this button resets the module.

3.4 Schematics

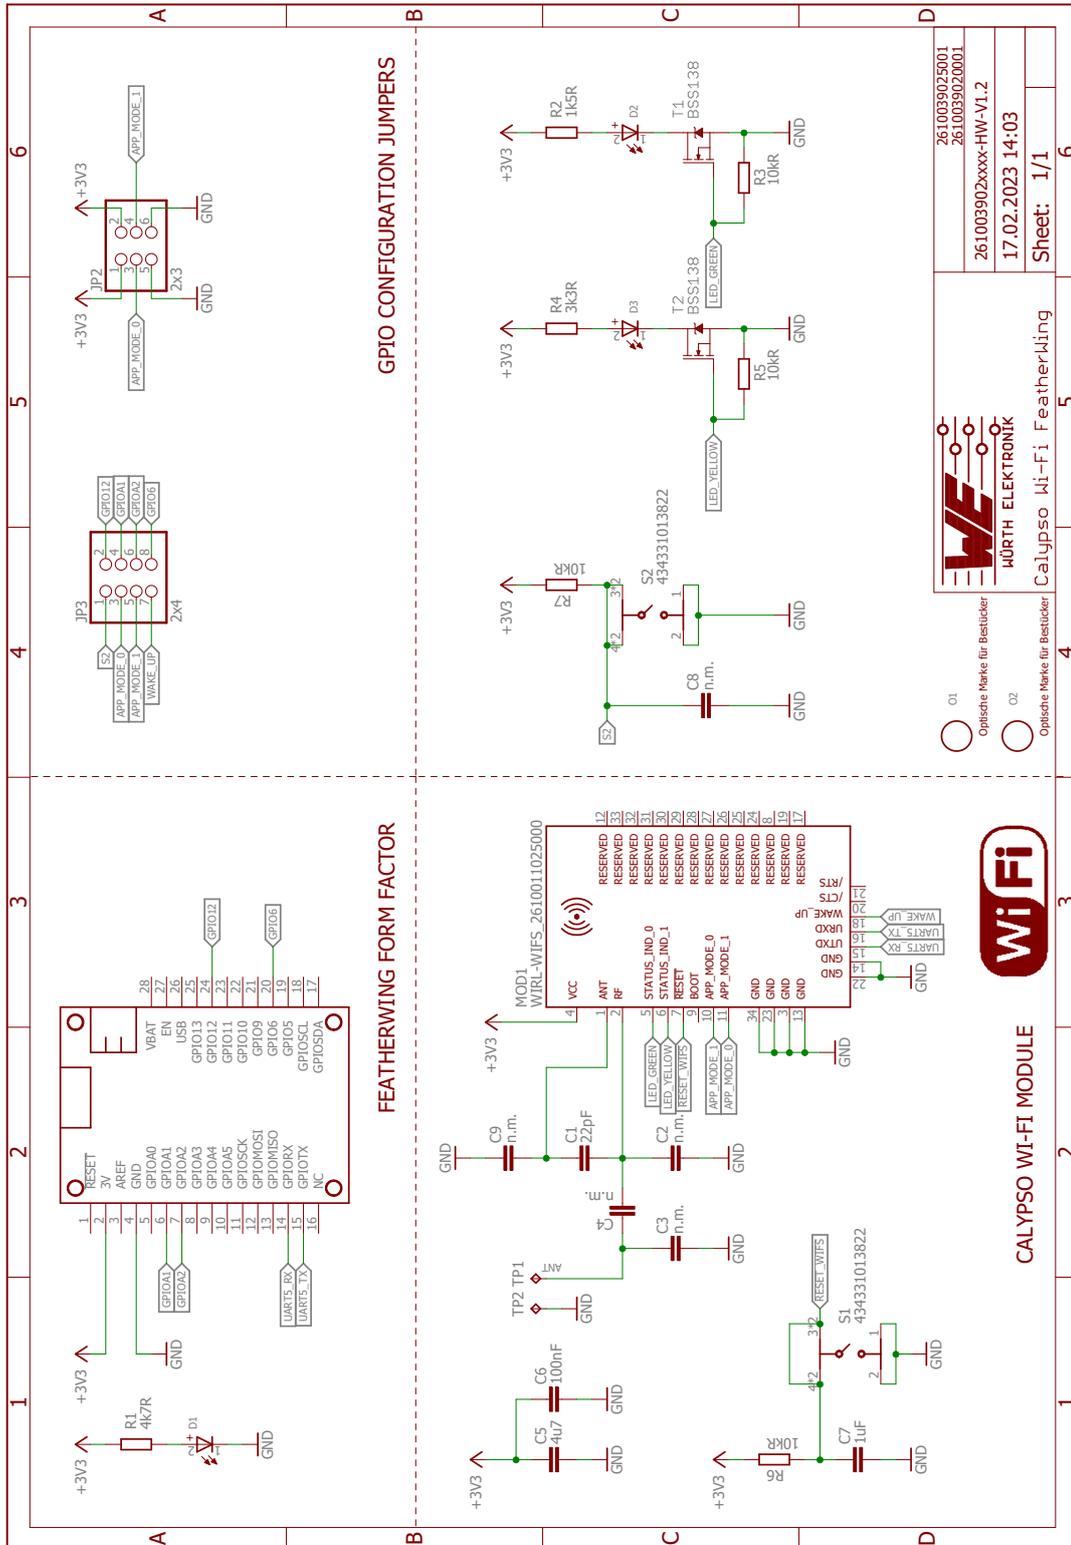


Figure 5: Schematics

3.5 Layout

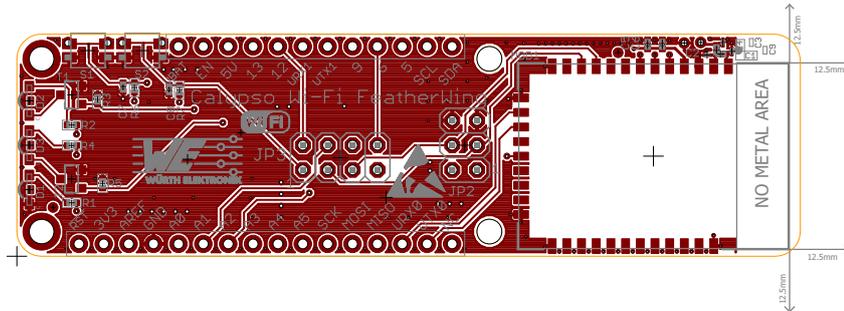


Figure 6: Assembly diagram

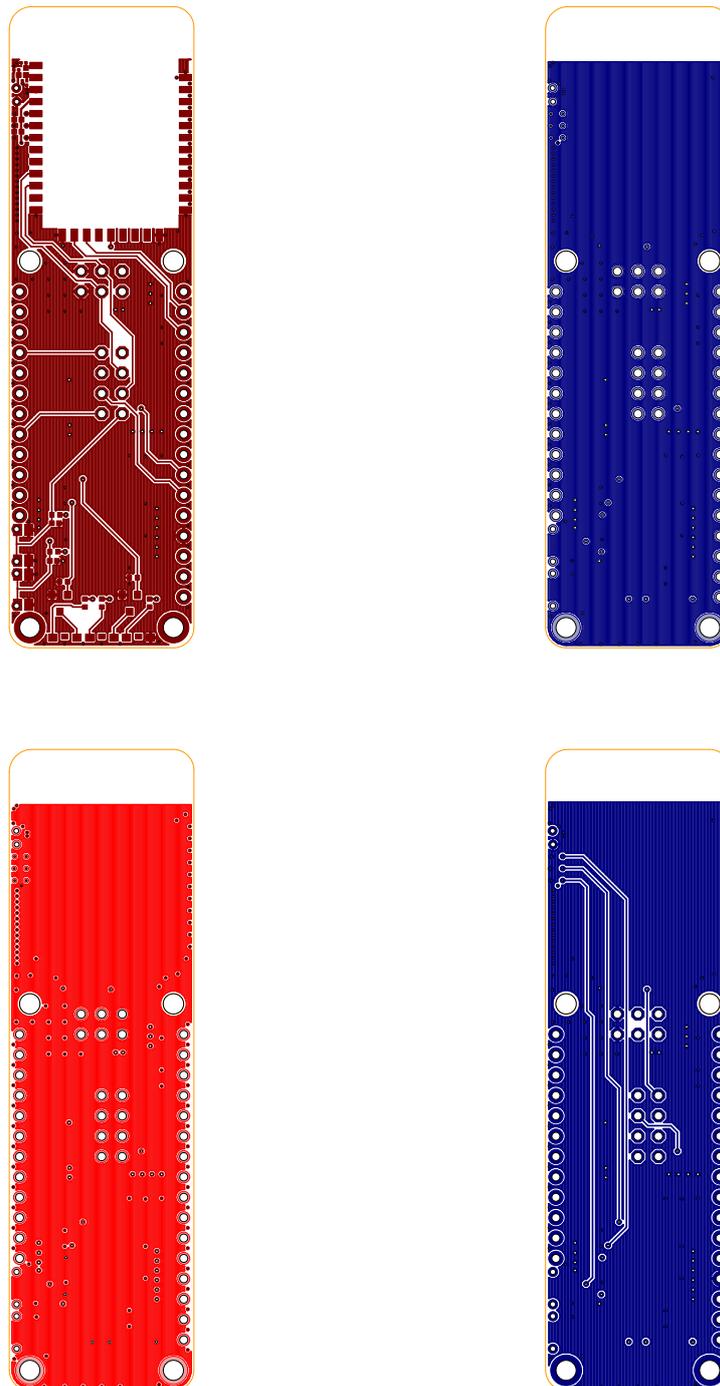


Figure 7: Top, bottom and internal layers

4 Software description

Würth Elektronik eiSos provides a software development kit (SDK) with examples to support all the WE FeatherWings. Here are the salient features of the WE FeatherWing SDK.

- The SDK is open-source and well documented.
- It uses popular open-source tool chain including an IDE.
- The examples are written in Arduino-styled C/C++ for quick prototyping.
- The core components of the SDK are written in pure C to enable easy porting to any microcontroller platform.
- Development platform independent (Windows, Linux or MAC).
- Modular structure of the software stack makes it easy to integrate into any project.

The SDK can be accessed on Github at github.com/WE-eiSmart/FeatherWings.

4.1 Software architecture

The WE FeatherWing SDK is built up in a modular way using a set of open-source tools to enable complete flexibility for the user.

The figure 8 shows the architecture of the WE FeatherWing SDK.

- **PlatformIO:** is a cross-platform, cross-architecture, multiple framework professional tool for embedded software development. It provides the tool chain necessary for the software development including building, debugging, code-upload and many more. PlatformIO works well on all the modern operating systems and supports a host of development boards including the Feathers from Adafruit. Further details about PlatformIO can be found under platformio.org
- **Platform interface:** This layer provides abstraction to the peripheral drivers for the platform being used. Currently, this SDK implements an abstraction to the Arduino peripheral drivers for the Feather M0 express platform.
- **WE SDK:** This is a layer of platform-independent pure C drivers for sensors and wireless connectivity modules from Würth Elektronik eiSos. These drivers implement all the necessary functions to utilize full feature set of the sensors and wireless connectivity modules. More details on the SDK and downloads under, we-online.com/wcs-software.
- **Board files:** This layer provides abstraction at a board level and provides functions to configure and control individual FeatherWings from WE.
- **User application:** The SDK currently implements a quick start example for each of the FeatherWings.

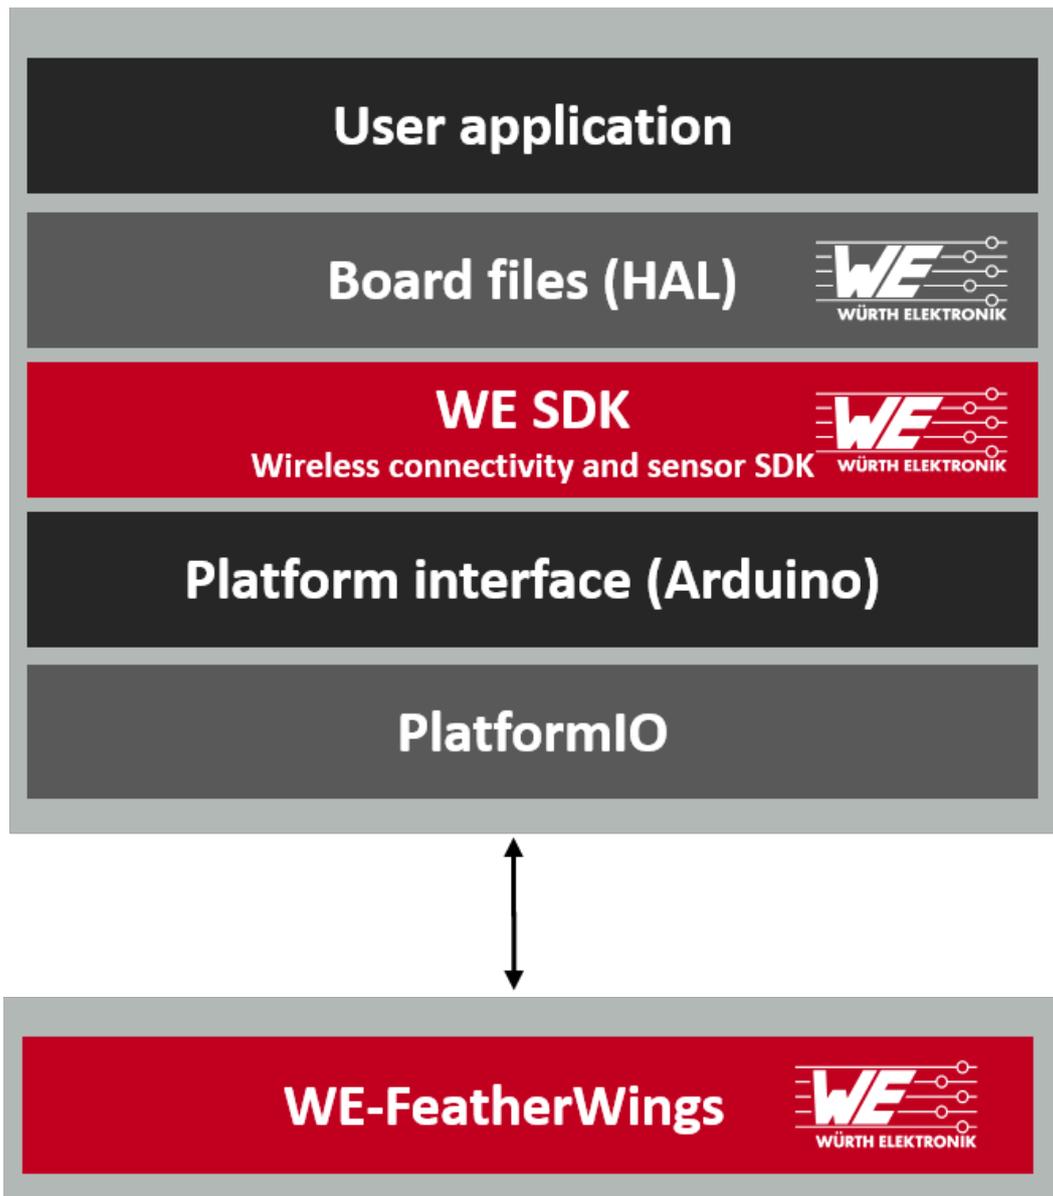


Figure 8: Software architecture

4.2 Installing the tools

4.2.1 IDE

Although, platformIO provides a versatile command line interface for development, the SDK provides quick start projects for the Visual Studio Code. This popular IDE makes for better code organization as well as code editing. Visual Studio Code is available on all modern operating systems. Support for extensions, built-in Git and a versatile code editor make it a well rounded tool for embedded software development. Please refer to code.visualstudio.com for more details on Visual Studio Code.

4.2.2 Installation steps

- Install Visual Studio Code on the platform of your choice following the instructions under code.visualstudio.com/docs
- Follow the instructions under platformio.org/install/ide?install=vscode to install PlatformIO IDE extension.

4.3 Hardware Setup

The quick start examples in the SDK are written to be run on *Adafruit's Feather M0 express*. The hardware setup is as simple as stacking up the FeatherWing on top of the M0 Feather and powering up the board.

4.4 Running the quick start example

- Clone or download the WE FeatherWing SDK from Github.
github.com/WE-eiSmart/FeatherWings
- Open the workspace of interest with the filename <FeatherWing>.code-workspace in Visual Studio code.
- Build and upload the code from the PlatformIO tab as shown in the Figure 9
- After successful upload, click on Monitor to view the debug logs in the serial terminal (see Figure 9).

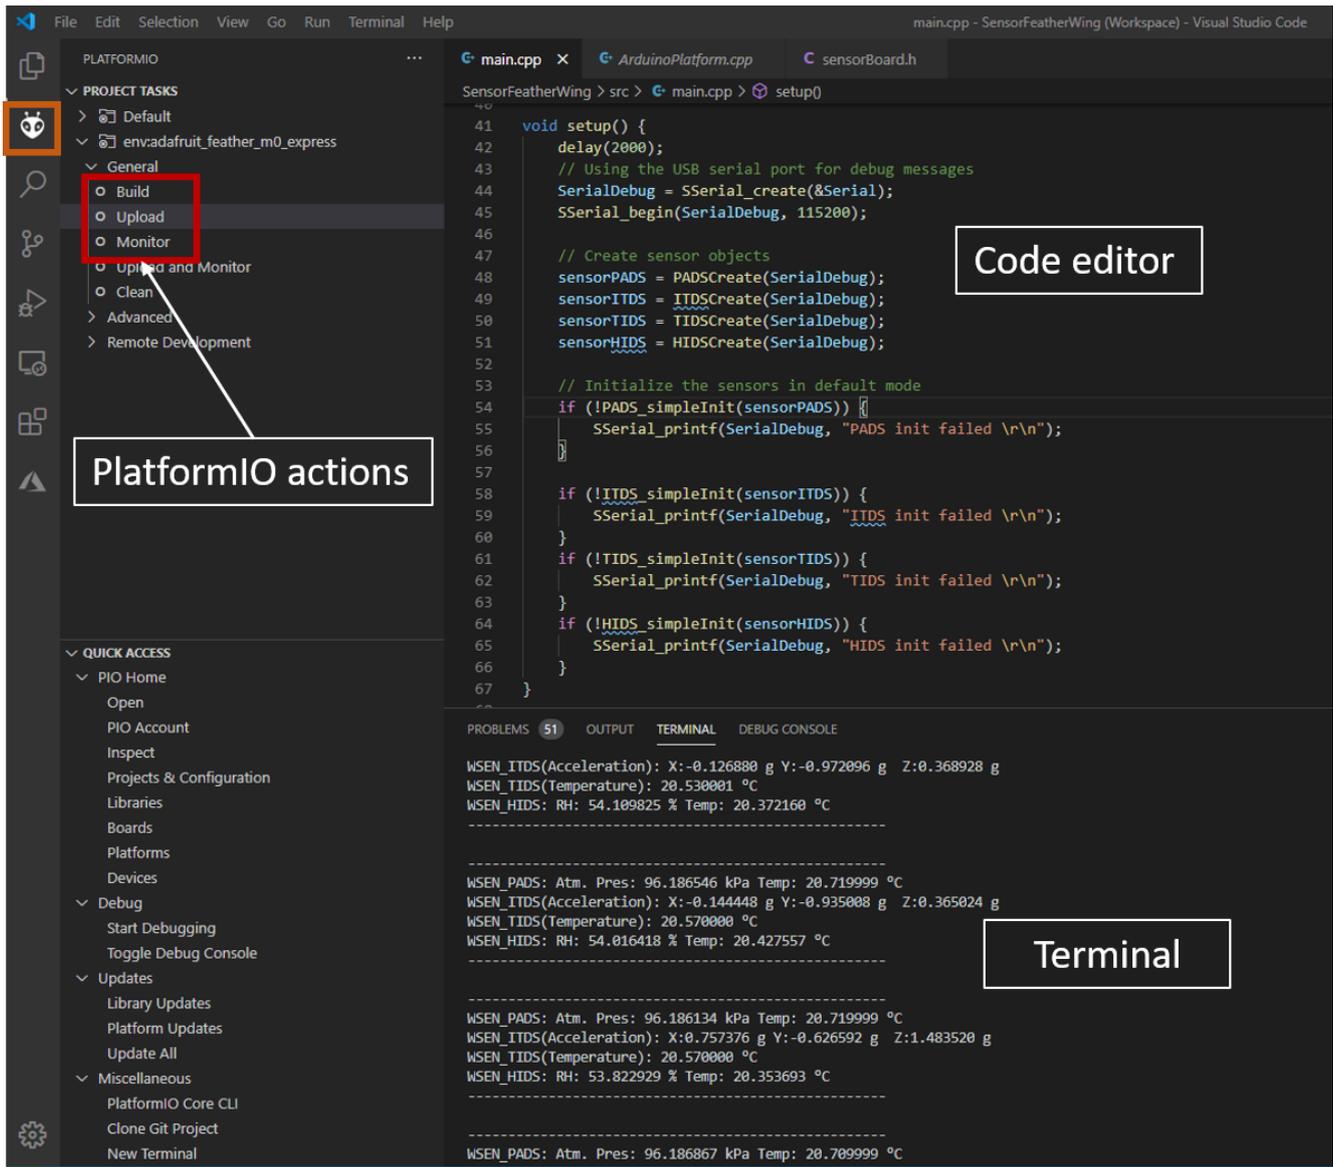


Figure 9: Running the quick start example

5 Regulatory compliance information

Pursuant to Article 1 (2.) of the EU directive 2014/53/EU, Article 1 (2.) the directive does not apply to equipment listed in Annex I (4.): custom-built evaluation kits destined for professionals to be used solely at research and development facilities for such purposes.

Nevertheless this evaluation board has been tested to satisfy general EMC requirements. Following standards have been applied:

- IEC 61000-4-3
- IEC 61000-4-4
- IEC 61000-4-6
- CISPR 16-2-1
- CISPR 16-2-3

5.1 Exemption clause

Relevant regulation requirements are subject to change. Würth Elektronik eiSos does not guarantee the accuracy of the before mentioned information. Directives, technical standards, procedural descriptions and the like may be interpreted differently by the national authorities. Equally, the national laws and restrictions may vary with the country. In case of doubt or uncertainty, we recommend that you consult with the authorities or official certification organizations of the relevant countries. Würth Elektronik eiSos is exempt from any responsibilities or liabilities related to regulatory compliance.

Notwithstanding the above, Würth Elektronik eiSos makes no representations and warranties of any kind related to their accuracy, correctness, completeness and/or usability for customer applications. No responsibility is assumed for inaccuracies or incompleteness.

6 Important notes

The following conditions apply to all goods within the wireless connectivity product range of Würth Elektronik eiSos GmbH & Co. KG:

6.1 General customer responsibility

Some goods within the product range of Würth Elektronik eiSos GmbH & Co. KG contain statements regarding general suitability for certain application areas. These statements about suitability are based on our knowledge and experience of typical requirements concerning the areas, serve as general guidance and cannot be estimated as binding statements about the suitability for a customer application. The responsibility for the applicability and use in a particular customer design is always solely within the authority of the customer. Due to this fact, it is up to the customer to evaluate, where appropriate to investigate and to decide whether the device with the specific product characteristics described in the product specification is valid and suitable for the respective customer application or not. Accordingly, the customer is cautioned to verify that the documentation is current before placing orders.

6.2 Customer responsibility related to specific, in particular safety-relevant applications

It has to be clearly pointed out that the possibility of a malfunction of electronic components or failure before the end of the usual lifetime cannot be completely eliminated in the current state of the art, even if the products are operated within the range of the specifications. The same statement is valid for all software sourcecode and firmware parts contained in or used with or for products in the wireless connectivity and sensor product range of Würth Elektronik eiSos GmbH & Co. KG. In certain customer applications requiring a high level of safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health, it must be ensured by most advanced technological aid of suitable design of the customer application that no injury or damage is caused to third parties in the event of malfunction or failure of an electronic component.

6.3 Best care and attention

Any product-specific data sheets, manuals, application notes, PCN's, warnings and cautions must be strictly observed in the most recent versions and matching to the products firmware revisions. This documents can be downloaded from the product specific sections on the wireless connectivity homepage.

6.4 Customer support for product specifications

Some products within the product range may contain substances, which are subject to restrictions in certain jurisdictions in order to serve specific technical requirements. Necessary information is available on request. In this case, the field sales engineer or the internal sales person in charge should be contacted who will be happy to support in this matter.

6.5 Product improvements

Due to constant product improvement, product specifications may change from time to time. As a standard reporting procedure of the Product Change Notification (PCN) according to the JEDEC-Standard, we inform about major changes. In case of further queries regarding the PCN, the field sales engineer, the internal sales person or the technical support team in charge should be contacted. The basic responsibility of the customer as per section 6.1 and 6.2 remains unaffected. All wireless connectivity module driver software "wireless connectivity SDK" and its source codes as well as all PC software tools are not subject to the Product Change Notification information process.

6.6 Product life cycle

Due to technical progress and economical evaluation we also reserve the right to discontinue production and delivery of products. As a standard reporting procedure of the Product Termination Notification (PTN) according to the JEDEC-Standard we will inform at an early stage about inevitable product discontinuance. According to this, we cannot ensure that all products within our product range will always be available. Therefore, it needs to be verified with the field sales engineer or the internal sales person in charge about the current product availability expectancy before or when the product for application design-in disposal is considered. The approach named above does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.

6.7 Property rights

All the rights for contractual products produced by Würth Elektronik eiSos GmbH & Co. KG on the basis of ideas, development contracts as well as models or templates that are subject to copyright, patent or commercial protection supplied to the customer will remain with Würth Elektronik eiSos GmbH & Co. KG. Würth Elektronik eiSos GmbH & Co. KG does not warrant or represent that any license, either expressed or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, application, or process in which Würth Elektronik eiSos GmbH & Co. KG components or services are used.

6.8 General terms and conditions

Unless otherwise agreed in individual contracts, all orders are subject to the current version of the "General Terms and Conditions of Würth Elektronik eiSos Group", last version available at www.we-online.com.

7 Legal notice

7.1 Exclusion of liability

Würth Elektronik eiSos GmbH & Co. KG considers the information in this document to be correct at the time of publication. However, Würth Elektronik eiSos GmbH & Co. KG reserves the right to modify the information such as technical specifications or functions of its products or discontinue the production of these products or the support of one of these products without any written announcement or notification to customers. The customer must make sure that the information used corresponds to the latest published information. Würth Elektronik eiSos GmbH & Co. KG does not assume any liability for the use of its products. Würth Elektronik eiSos GmbH & Co. KG does not grant licenses for its patent rights or for any other of its intellectual property rights or third-party rights.

Notwithstanding anything above, Würth Elektronik eiSos GmbH & Co. KG makes no representations and/or warranties of any kind for the provided information related to their accuracy, correctness, completeness, usage of the products and/or usability for customer applications. Information published by Würth Elektronik eiSos GmbH & Co. KG regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof.

7.2 Suitability in customer applications

The customer bears the responsibility for compliance of systems or units, in which Würth Elektronik eiSos GmbH & Co. KG products are integrated, with applicable legal regulations. Customer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of Würth Elektronik eiSos GmbH & Co. KG components in its applications, notwithstanding any applications-related information or support that may be provided by Würth Elektronik eiSos GmbH & Co. KG. Customer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences lessen the likelihood of failures that might cause harm and take appropriate remedial actions. The customer will fully indemnify Würth Elektronik eiSos GmbH & Co. KG and its representatives against any damages arising out of the use of any Würth Elektronik eiSos GmbH & Co. KG components in safety-critical applications.

7.3 Trademarks

AMBER wireless is a registered trademark of Würth Elektronik eiSos GmbH & Co. KG. All other trademarks, registered trademarks, and product names are the exclusive property of the respective owners.

7.4 Usage restriction

Würth Elektronik eiSos GmbH & Co. KG products have been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment

where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover, Würth Elektronik eiSos GmbH & Co. KG products are neither designed nor intended for use in areas such as military, aerospace, aviation, nuclear control, submarine, transportation (automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network etc. Würth Elektronik eiSos GmbH & Co. KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component, which is used in electrical circuits that require high safety and reliability function or performance. By using Würth Elektronik eiSos GmbH & Co. KG products, the customer agrees to these terms and conditions.

8 License terms

These License terms will take effect upon the purchase and usage of the Würth Elektronik eiSos GmbH & Co. KG wireless connectivity products. You hereby agree that these license terms are applicable to the product and the incorporated software, firmware and source codes (collectively, "Software") made available by Würth Elektronik eiSos in any form, including but not limited to binary, executable or source code form.

The software included in any Würth Elektronik eiSos wireless connectivity product is purchased to you on the condition that you accept the terms and conditions of these license terms. You agree to comply with all provisions under these license terms.

8.1 Limited license

Würth Elektronik eiSos hereby grants you a limited, non-exclusive, non-transferable and royalty-free license to use the software and under the conditions that will be set forth in these license terms. You are free to use the provided software only in connection with one of the products from Würth Elektronik eiSos to the extent described in these license terms. You are entitled to change or alter the source code for the sole purpose of creating an application embedding the Würth Elektronik eiSos wireless connectivity product. The transfer of the source code to third parties is allowed to the sole extent that the source code is used by such third parties in connection with our product or another hardware provided by Würth Elektronik eiSos under strict adherence of these license terms. Würth Elektronik eiSos will not assume any liability for the usage of the incorporated software and the source code. You are not entitled to transfer the source code in any form to third parties without prior written consent of Würth Elektronik eiSos.

You are not allowed to reproduce, translate, reverse engineer, decompile, disassemble or create derivative works of the incorporated software and the source code in whole or in part. No more extensive rights to use and exploit the products are granted to you.

8.2 Usage and obligations

The responsibility for the applicability and use of the Würth Elektronik eiSos wireless connectivity product with the incorporated firmware in a particular customer design is always solely within the authority of the customer. Due to this fact, it is up to you to evaluate and investigate, where appropriate, and to decide whether the device with the specific product characteristics described in the product specification is valid and suitable for your respective application or not.

You are responsible for using the Würth Elektronik eiSos wireless connectivity product with the incorporated firmware in compliance with all applicable product liability and product safety laws. You acknowledge to minimize the risk of loss and harm to individuals and bear the risk for failure leading to personal injury or death due to your usage of the product.

Würth Elektronik eiSos' products with the incorporated firmware are not authorized for use in safety-critical applications, or where a failure of the product is reasonably expected to cause severe personal injury or death. Moreover, Würth Elektronik eiSos' products with the incorporated firmware are neither designed nor intended for use in areas such as military, aerospace, aviation, nuclear control, submarine, transportation (automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network etc. You

shall inform Würth Elektronik eiSos about the intent of such usage before design-in stage. In certain customer applications requiring a very high level of safety and in which the malfunction or failure of an electronic component could endanger human life or health, you must ensure to have all necessary expertise in the safety and regulatory ramifications of your applications. You acknowledge and agree that you are solely responsible for all legal, regulatory and safety-related requirements concerning your products and any use of Würth Elektronik eiSos' products with the incorporated firmware in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by Würth Elektronik eiSos. YOU SHALL INDEMNIFY WÜRTH ELEKTRONIK EISOS AGAINST ANY DAMAGES ARISING OUT OF THE USE OF WÜRTH ELEKTRONIK EISOS' PRODUCTS WITH THE INCORPORATED FIRMWARE IN SUCH SAFETY-CRITICAL APPLICATIONS.

8.3 Ownership

The incorporated firmware created by Würth Elektronik eiSos is and will remain the exclusive property of Würth Elektronik eiSos.

8.4 Firmware update(s)

You have the opportunity to request the current and actual firmware for a bought wireless connectivity product within the time of warranty. However, Würth Elektronik eiSos has no obligation to update a modules firmware in their production facilities, but can offer this as a service on request. The upload of firmware updates falls within your responsibility, e.g. via ACC or another software for firmware updates. Firmware updates will not be communicated automatically. It is within your responsibility to check the current version of a firmware in the latest version of the product manual on our website. The revision table in the product manual provides all necessary information about firmware updates. There is no right to be provided with binary files, so called "firmware images", those could be flashed through JTAG, SWD, Spi-Bi-Wire, SPI or similar interfaces.

8.5 Disclaimer of warranty

THE FIRMWARE IS PROVIDED "AS IS". YOU ACKNOWLEDGE THAT WÜRTH ELEKTRONIK EISOS MAKES NO REPRESENTATIONS AND WARRANTIES OF ANY KIND RELATED TO, BUT NOT LIMITED TO THE NON-INFRINGEMENT OF THIRD PARTIES' INTELLECTUAL PROPERTY RIGHTS OR THE MERCHANTABILITY OR FITNESS FOR YOUR INTENDED PURPOSE OR USAGE. WÜRTH ELEKTRONIK EISOS DOES NOT WARRANT OR REPRESENT THAT ANY LICENSE, EITHER EXPRESS OR IMPLIED, IS GRANTED UNDER ANY PATENT RIGHT, COPYRIGHT, MASK WORK RIGHT, OR OTHER INTELLECTUAL PROPERTY RIGHT RELATING TO ANY COMBINATION, MACHINE, OR PROCESS IN WHICH THE WÜRTH ELEKTRONIK EISOS' PRODUCT WITH THE INCORPORATED FIRMWARE IS USED. INFORMATION PUBLISHED BY WÜRTH ELEKTRONIK EISOS REGARDING THIRD-PARTY PRODUCTS OR SERVICES DOES NOT CONSTITUTE A LICENSE FROM WÜRTH ELEKTRONIK EISOS TO USE SUCH PRODUCTS OR SERVICES OR A WARRANTY OR ENDORSEMENT THEREOF.

8.6 Limitation of liability

Any liability not expressly provided by Würth Elektronik eiSos shall be disclaimed. You agree to hold us harmless from any third-party claims related to your usage of the Würth Elektronik eiSos' products with the incorporated firmware, software and source code. Würth Elektronik eiSos disclaims any liability for any alteration, development created by you or your customers as well as for any combination with other products.

8.7 Applicable law and jurisdiction

Applicable law to these license terms shall be the laws of the Federal Republic of Germany. Any dispute, claim or controversy arising out of or relating to these license terms shall be resolved and finally settled by the court competent for the location of Würth Elektronik eiSos registered office.

8.8 Severability clause

If a provision of these license terms is or becomes invalid, unenforceable or null and void, this shall not affect the remaining provisions of the terms. The parties shall replace any such provisions with new valid provisions that most closely approximate the purpose of the terms.

8.9 Miscellaneous

Würth Elektronik eiSos reserves the right at any time to change this terms at its own discretion. It is your responsibility to check at Würth Elektronik eiSos homepage for any updates. Your continued usage of the products will be deemed as the acceptance of the change.

We recommend you to be updated about the status of new firmware and software, which is available on our website or in our data sheet and manual, and to implement new software in your device where appropriate.

By ordering a product, you accept these license terms in all terms.

List of Figures

1	The WE Calypso FeatherWing (2610039025001)	5
2	Block diagram - Calypso FeatherWing	6
3	Jumpers and their default state	10
4	Push buttons	12
5	Schematics	13
6	Assembly diagram	14
7	Top, bottom and internal layers	15
8	Software architecture	17
9	Running the quick start example	19

List of Tables

1	Contents 2610039025001	6
2	Key features	8
3	Jumper JP2	11
4	Calypso Application modes	11
5	Jumper JP3	11



Contact

Würth Elektronik eiSos GmbH & Co. KG
Division Wireless Connectivity & Sensors

Max-Eyth-Straße 1
74638 Waldenburg
Germany

Tel.: +49 651 99355-0
Fax.: +49 651 99355-69
www.we-online.com/wireless-connectivity

WÜRTH ELEKTRONIK MORE THAN YOU EXPECT