



MCP39F511A CT

Power Meter

User's Guide

Note the following details of the code protection feature on Microchip products:

- Microchip products meet the specifications contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is secure when used in the intended manner, within operating specifications, and under normal conditions.
- Microchip values and aggressively protects its intellectual property rights. Attempts to breach the code protection features of Microchip product is strictly prohibited and may violate the Digital Millennium Copyright Act.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of its code. Code protection does not mean that we are guaranteeing the product is "unbreakable" Code protection is constantly evolving. Microchip is committed to continuously improving the code protection features of our products.

This publication and the information herein may be used only with Microchip products, including to design, test, and integrate Microchip products with your application. Use of this information in any other manner violates these terms. Information regarding device applications is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. Contact your local Microchip sales office for additional support or, obtain additional support at <https://www.microchip.com/en-us/support/design-help/client-support-services>.

THIS INFORMATION IS PROVIDED BY MICROCHIP "AS IS". MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY, AND FITNESS FOR A PARTICULAR PURPOSE, OR WARRANTIES RELATED TO ITS CONDITION, QUALITY, OR PERFORMANCE.

IN NO EVENT WILL MICROCHIP BE LIABLE FOR ANY INDIRECT, SPECIAL, PUNITIVE, INCIDENTAL, OR CONSEQUENTIAL LOSS, DAMAGE, COST, OR EXPENSE OF ANY KIND WHATSOEVER RELATED TO THE INFORMATION OR ITS USE, HOWEVER CAUSED, EVEN IF MICROCHIP HAS BEEN ADVISED OF THE POSSIBILITY OR THE DAMAGES ARE FORESEEABLE. TO THE FULLEST EXTENT ALLOWED BY LAW, MICROCHIP'S TOTAL LIABILITY ON ALL CLAIMS IN ANY WAY RELATED TO THE INFORMATION OR ITS USE WILL NOT EXCEED THE AMOUNT OF FEES, IF ANY, THAT YOU HAVE PAID DIRECTLY TO MICROCHIP FOR THE INFORMATION.

Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights unless otherwise stated.

For information regarding Microchip's Quality Management Systems, please visit www.microchip.com/quality.

Trademarks

The Microchip name and logo, the Microchip logo, Adaptec, AVR, AVR logo, AVR Freaks, BesTime, BitCloud, CryptoMemory, CryptoRF, dsPIC, flexPWR, HELDO, IGLOO, JukeBlox, KeeLoq, Kleer, LANCheck, LinkMD, maxStylus, maxTouch, MediaLB, megaAVR, Microsemi, Microsemi logo, MOST, MOST logo, MPLAB, OptoLyzer, PIC, picoPower, PICSTART, PIC32 logo, PolarFire, Prochip Designer, QTouch, SAM-BA, SenGenuity, SpyNIC, SST, SST Logo, SuperFlash, Symmetricom, SyncServer, Tachyon, TimeSource, tinyAVR, UNI/O, Vectron, and XMEGA are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

AgileSwitch, APT, ClockWorks, The Embedded Control Solutions Company, EtherSynch, Flashtec, Hyper Speed Control, HyperLight Load, Libero, motorBench, mTouch, Powermite 3, Precision Edge, ProASIC, ProASIC Plus, ProASIC Plus logo, Quiet-Wire, SmartFusion, SyncWorld, Temux, TimeCesium, TimeHub, TimePictra, TimeProvider, TrueTime, and ZL are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Adjacent Key Suppression, AKS, Analog-for-the-Digital Age, Any Capacitor, AnyIn, AnyOut, Augmented Switching, BlueSky, BodyCom, Clockstudio, CodeGuard, CryptoAuthentication, CryptoAutomotive, CryptoCompanion, CryptoController, dsPICDEM, dsPICDEM.net, Dynamic Average Matching, DAM, ECAN, Espresso T1S, EtherGREEN, GridTime, IdealBridge, In-Circuit Serial Programming, ICSP, INICnet, Intelligent Paralleling, IntelliMOS, Inter-Chip Connectivity, JitterBlocker, Knob-on-Display, KoD, maxCrypto, maxView, memBrain, Mindi, MiWi, MPASM, MPF, MPLAB Certified logo, MPLIB, MPLINK, MultiTRAK, NetDetach, Omniscient Code Generation, PICDEM, PICDEM.net, PICkit, PICtail, PowerSmart, PureSilicon, QMatrix, REAL ICE, Ripple Blocker, RTAX, RTG4, SAM-ICE, Serial Quad I/O, simpleMAP, SimpliPHY, SmartBuffer, SmartHLS, SMART-I.S., storClad, SQI, SuperSwitcher, SuperSwitcher II, Switchtec, SynchroPHY, Total Endurance, Trusted Time, TSHARC, USBCheck, VariSense, VectorBlox, VeriPHY, ViewSpan, WiperLock, XpressConnect, and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

The Adaptec logo, Frequency on Demand, Silicon Storage Technology, and Symmcom are registered trademarks of Microchip Technology Inc. in other countries.

GestIC is a registered trademark of Microchip Technology Germany II GmbH & Co. KG, a subsidiary of Microchip Technology Inc., in other countries.

All other trademarks mentioned herein are property of their respective companies.

© 2022-2023, Microchip Technology Incorporated and its subsidiaries.

All Rights Reserved.

ISBN: 978-1-6683-2373-1

Table of Contents

Preface	5
Introduction.....	5
Document Layout	5
Conventions Used in this Guide	6
Recommended Reading.....	7
The Microchip Website	7
Product Change Notification Service.....	7
Customer Support	7
Document Revision History	7
Chapter 1. Product Overview	
1.1 Introduction	9
1.2 MCP39F511A CT Power Meter Features	10
1.3 MCP39F511A CT Power Meter Kit Contents	10
1.4 Not Included in the Kit	10
Chapter 2. Installation and Operation	
2.1 Getting Started	11
Chapter 3. Hardware Description	
3.1 Board Design	15
Chapter 4. Test Results	
4.1 Test Setup – Fluke 6100A Electrical Power Standard	19
Appendix A. Schematics and Layouts	
A.1 Introduction	21
A.2 Board – Schematic (Power + USB)	22
A.3 Board – Schematic (MCP39F511A)	23
A.4 Board – Schematic (Mechanical)	24
A.5 Board – Top Silk	25
A.6 Board – Top Copper and Silk	26
A.7 Board – Top Copper	27
A.8 Board – Bottom Copper	28
A.9 Board – Bottom Copper and Silk	29
A.10 Board – Bottom Silk	30
Appendix B. Bill of Materials (BOM)	
Worldwide Sales and Service	33

MCP39F511A CT Power Meter User's Guide

Preface

All documentation becomes dated, and this manual is no exception. Microchip tools and documentation are constantly evolving to meet customer needs, so some actual dialogs and/or tool descriptions may differ from those in this document. Please refer to our website (www.microchip.com) to obtain the latest documentation available.

Documents are identified with a “DS” number. This number is located on the bottom of each page, in front of the page number. The numbering convention for the DS number is “DSXXXXXXXXA”, where “XXXXXXXX” is the document number and “A” is the revision level of the document.

For the most up-to-date information on development tools, see the MPLAB® IDE online help. Select the Help menu, and then Topics to open a list of available online help files.

INTRODUCTION

This chapter contains general information that is useful to know before using the MCP39F511A CT Power Meter. Items discussed in this chapter include:

- [Document Layout](#)
- [Conventions Used in this Guide](#)
- [Recommended Reading](#)
- [The Microchip Website](#)
- [Product Change Notification Service](#)
- [Customer Support](#)
- [Document Revision History](#)

DOCUMENT LAYOUT

This document describes how to use the MCP39F511A CT Power Meter as a development tool. The manual layout is as follows:

- **Chapter 1. “Product Overview”** – Important information about the MCP39F511A CT Power Meter.
- **Chapter 2. “Installation and Operation”** – Includes instructions on how to get started with the MCP39F511A CT Power Meter.
- **Chapter 3. “Hardware Description”** – Includes hardware details about the MCP39F511A CT Power Meter.
- **Chapter 4. “Test Results”** – Includes data samples taken during board validation.
- **Appendix A. “Schematics and Layouts”** – Shows the schematics and layout diagrams for the MCP39F511A CT Power Meter.
- **Appendix B. “Bill of Materials (BOM)”** – Lists the parts used to build the MCP39F511A CT Power Meter.

MCP39F511A CT Power Meter User's Guide

CONVENTIONS USED IN THIS GUIDE

This manual uses the following documentation conventions:

DOCUMENTATION CONVENTIONS

Description	Represents	Examples
Arial font:		
Italic characters	Referenced books	<i>MPLAB® IDE User's Guide</i>
	Emphasized text	...is the <i>only</i> compiler...
Initial caps	A window	the Output window
	A dialog	the Settings dialog
	A menu selection	select Enable Programmer
Quotes	A field name in a window or dialog	"Save project before build"
Underlined, Italic text with right angle bracket	A menu path	<u><i>File>Save</i></u>
Bold characters	A dialog button	Click OK
	A tab	Click the Power tab
N'Rnnnn	A number in verilog format, where N is the total number of digits, R is the radix and n is a digit.	4'b0010, 2'hF1
Text in angle brackets < >	A key on the keyboard	Press <Enter>, <F1>
Courier New font:		
Plain Courier New	Sample source code	#define START
	Filenames	autoexec.bat
	File paths	c:\mcc18\h
	Keywords	_asm, _endasm, static
	Command-line options	-Opa+, -Opa-
	Bit values	0, 1
	Constants	0xFF, 'A'
Italic Courier New	A variable argument	<i>file.o</i> , where <i>file</i> can be any valid filename
Square brackets []	Optional arguments	mcc18 [options] <i>file</i> [options]
Curly brackets and pipe character: { }	Choice of mutually exclusive arguments; an OR selection	errorlevel {0 1}
Ellipses...	Replaces repeated text	var_name [, var_name...]
	Represents code supplied by user	void main (void) { ... }

RECOMMENDED READING

This user's guide describes how to use the MCP39F511A CT Power Meter. Another useful document is listed below.

- **MCP39F511A Data Sheet – “AC/DC Dual-Mode Power-Monitoring IC with Calculation and Energy Accumulation” (DS20006044)**

THE MICROCHIP WEBSITE

Microchip provides online support via our website at www.microchip.com. This website is used as a means to make files and information easily available to customers. Accessible by using your favorite Internet browser, the website contains the following information:

- **Product Support** – Data sheets and errata, application notes and sample programs, design resources, user's guides and hardware support documents, latest software releases and archived software
- **General Technical Support** – Frequently Asked Questions (FAQs), technical support requests, online discussion groups, Microchip consultant program member listing
- **Business of Microchip** – Product selector and ordering guides, latest Microchip press releases, listing of seminars and events, listings of Microchip sales offices, distributors and factory representatives

PRODUCT CHANGE NOTIFICATION SERVICE

Microchip's customer notification service helps keep customers current on Microchip products. Subscribers receive email notifications whenever there are changes, updates, revisions or errata related to a specified product family or development tool of interest.

To register, access the Microchip website at www.microchip.com, click on **Product Change Notification** and follow the registration instructions.

CUSTOMER SUPPORT

Users of Microchip products can receive assistance through several channels:

- Distributor or Representative
- Local Sales Office
- Embedded System Engineer (ESE)
- Technical Support

Customers should contact their distributor, representative or field application engineer (FAE) for support. Local sales offices are also available to help customers. A listing of sales offices and locations is included in the back of this document.

Technical support is available through the website at:
<https://www.microchip.com/support>.

DOCUMENT REVISION HISTORY

Revision B (May 2023)

- Updated **Section 2.1.2.2 “Step 2: CURRENT TRANSFORMER CONNECTION”**
- Updated **Figure 2-1** and **Figure 2-2**

Revision A (October 2022)

- Initial release of this document

MCP39F511A CT Power Meter User's Guide

NOTES:

Chapter 1. Product Overview

1.1 INTRODUCTION

The MCP39F511A Current Transformer (CT) Power Meter is a single-phase evaluation board demonstrating current measurement using a split-core current transformer. The system calculates the active/reactive power, RMS current, RMS voltage, active energy (both import and export), reactive energy and other typical power quantities, as defined in the MCP39F511A data sheet.

Note: Boards are not shipped calibrated and must be calibrated using standard calibration equipment and the Power Monitor Utility user interface software included with the board. For most accuracy requirements, only a single-point calibration is needed. The software offers an automated step-by-step calibration process that can be used to quickly calibrate measurements.

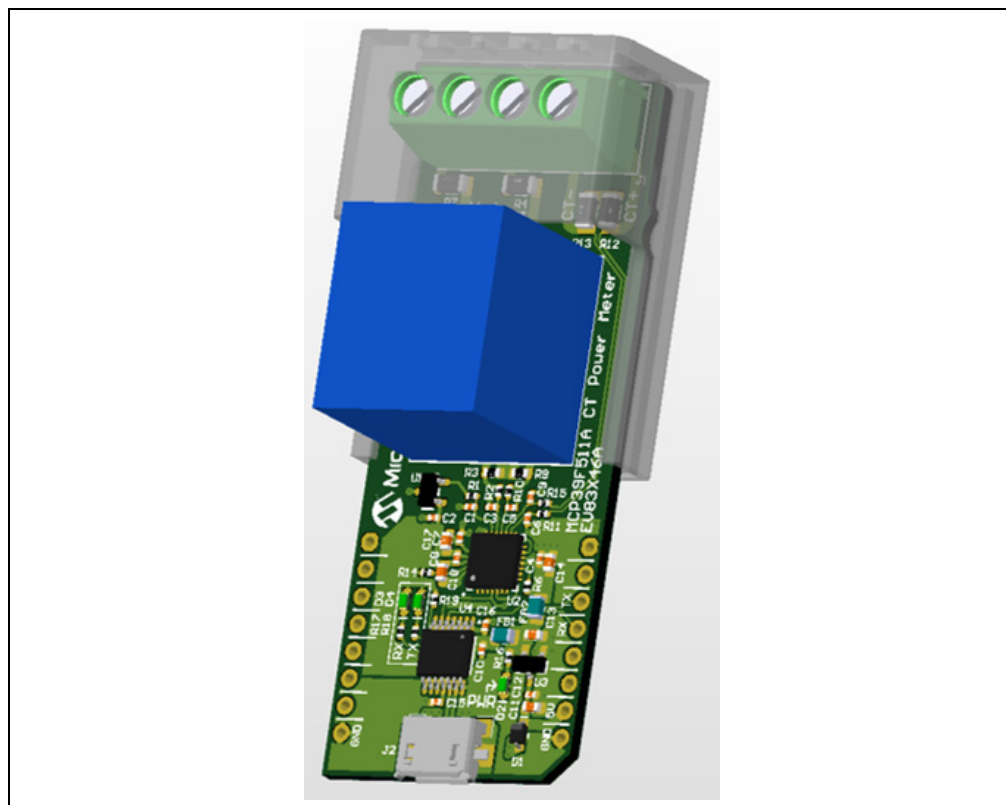


FIGURE 1-1: MCP39F511A CT Power Meter.

Communication between the MCP39F511A CT Power Meter and the Power Monitor Utility user interface is established via the MCP2221A USB 2.0 to I²C/UART Protocol Converter. The Power Monitor Utility software can be found on the demonstration board's product [webpage](#).

MCP39F511A CT Power Meter User's Guide

1.2 MCP39F511A CT POWER METER FEATURES

- MCP39F511A 24-bit Single-Phase AC/DC Power Monitoring IC
- ZMPT101L Current-Type Voltage Transformer
- MCP9700 Low-Power Linear Active Thermistor IC
- MCP2221A USB 2.0 to I²C/UART Protocol Converter with GPIO
- MCP1754 16V, High PSRR, 150 mA LDO w/V_{OUT} = 3.3V
- mikroBUS™ Header Interface
- 4-Position Screw Block Terminal
- Micro-USB 2.0 Connector

1.3 MCP39F511A CT POWER METER KIT CONTENTS

The MCP39F511A CT Power Meter kit includes:

- MCP39F511A CT Power Meter (EV83X46A)
- SCT013-000 100A to 50 mA Split-Core Transformer with 1% Accuracy and Linearity
- Micro-USB Cable
- Important Information Sheet

1.4 NOT INCLUDED IN THE KIT

The MCP39F511A CT Power Meter kit **does not** include the following:

- AC Line Cable (see [Figure 2-1](#) and [Figure 2-2](#)).

Chapter 2. Installation and Operation

2.1 GETTING STARTED

The MCP39F511A CT Power Meter uses four connections, two connections for L and N of the mains voltage (120 VAC to 240 VAC) and two connections for C+ and C- of the current transformer. The MCP39F511A CT Power Meter is supplied with a 100A to 50 mA (1:2000) split-core transformer from PowerUC Electronics Co., Ltd. (YHDC®) as the current sensing component.

Note: All color-coded connections described in this section are based on the connections for the PowerUC Electronics Co., Ltd. SCT013-000 Split-Core Current Transformer. If an alternate current transformer is used, refer to the manufacturer's documentation for proper connections.

2.1.1 MCP39F511A CT Power Meter Wiring Connections

2.1.1.1 STEP 1: CURRENT TRANSFORMER WIRING CONNECTIONS

Connect the SCT013-000 transformer to the MCP39F511A CT Power Meter by connecting the white wire to the C+ input at the J1 terminal block and the red wire to the C- input at the J1 terminal block (see [Figure 2-1](#)).

2.1.1.2 STEP 2: MAINS VOLTAGE WIRING CONNECTIONS

Connect the mains line and neutral voltage sources to the L and N inputs of the J1 terminal block (figure below).

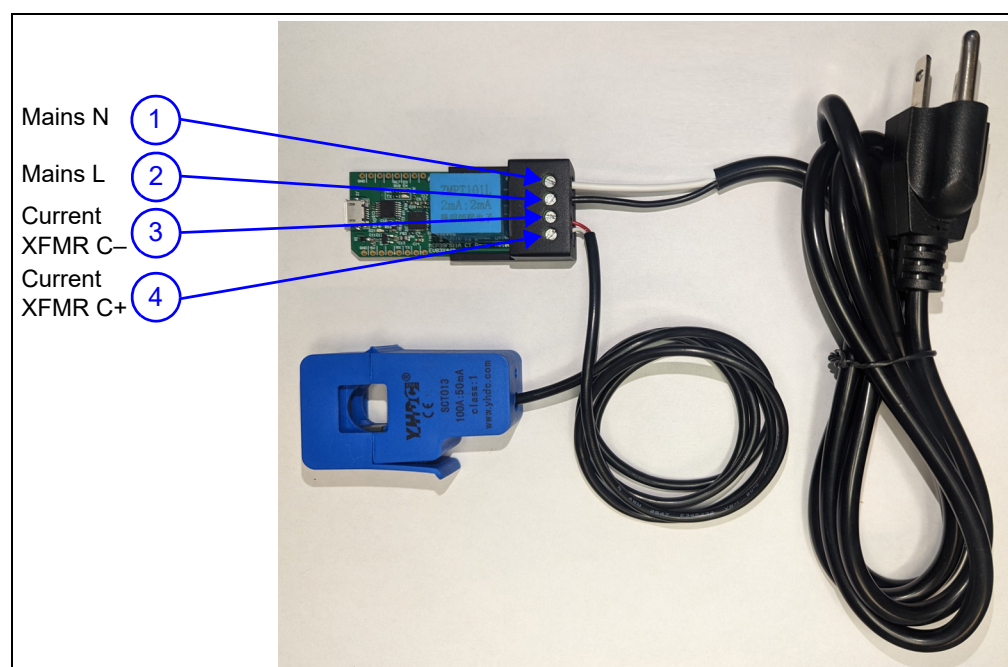


FIGURE 2-1: Wiring Connections.

MCP39F511A CT Power Meter User's Guide

2.1.2 Applying Power and Connecting the Current Transformer

2.1.2.1 STEP 1: APPLYING MAINS POWER TO THE BOARD

Apply mains power to the board via the power supply cable connected to the L and N sockets of the J1 terminal block.

2.1.2.2 STEP 2: CURRENT TRANSFORMER CONNECTION

Connect the SCT013-000 CT to a load current carrying wire, as shown in the figure below. The CT is connected around the L wire of the AC line cable (not supplied). Connecting the CT around the N wire provides the same results. However, simply connecting the CT around the entire cable results in a near-zero current measurement due to the current in the L and N wires flowing in the opposite direction within the cable.



FIGURE 2-2: *Current Transformer Connection.*

2.1.3 Power Monitor Utility

2.1.3.1 STEP 1: CONNECT THE MCP39F511A CT POWER METER TO THE COMPUTER

Connect the Micro-USB connector of the supplied USB cable to the MCP39F511A CT Power Meter and connect the standard USB connector to a PC.


2.1.3.2 STEP 2: LAUNCH THE POWER MONITOR UTILITY SOFTWARE

Launch the Power Monitor Utility software and select the MCP39F511A from the drop-down menu.

2.1.3.3 STEP 3: VERIFY COMMUNICATIONS

Verify communications are properly established by checking the “Connection Status” in the tray of the software. If communications are not immediately established, the “Connection Status” displays “Meter Disconnected”. In this event, try selecting a different COM port via the **COM Port** drop-down menu in the top-right window corner. The **COM Port** initialized by connecting the MCP39F511A CT Power Meter to a PC USB port can be found in the PC Device Manager. See [Figure 2-3](#).


FIGURE 2-3: METER CONNECTION STATUS

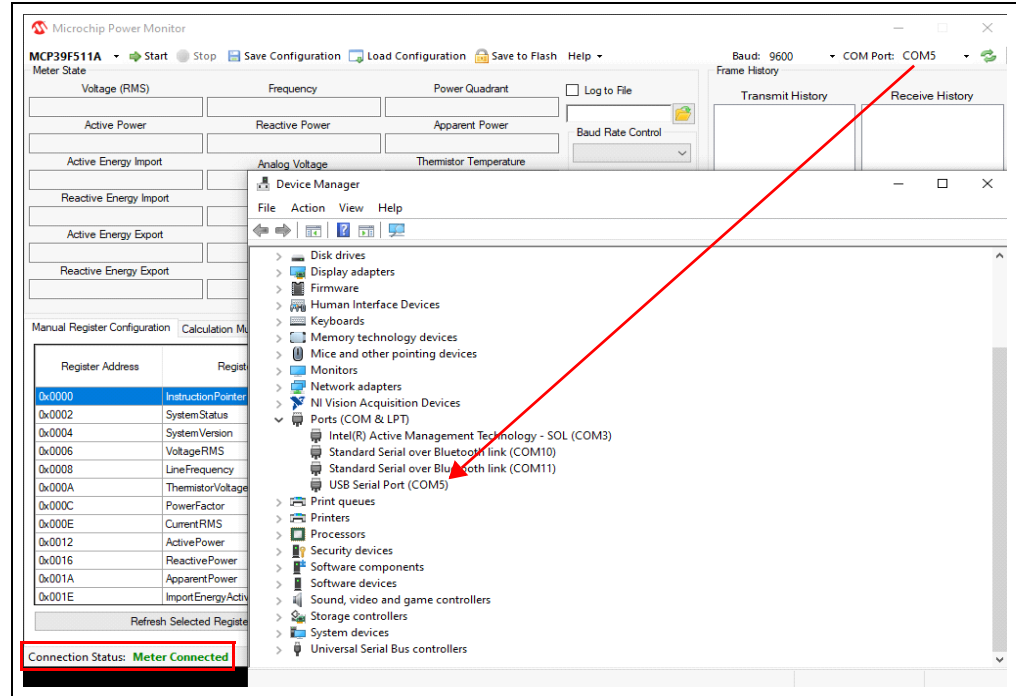

2.1.3.4 STEP 4: START METERING

To start collecting power measurements, click the **Start** button to begin data acquisition (see the figure below).

FIGURE 2-4: DATA ACQUISITION

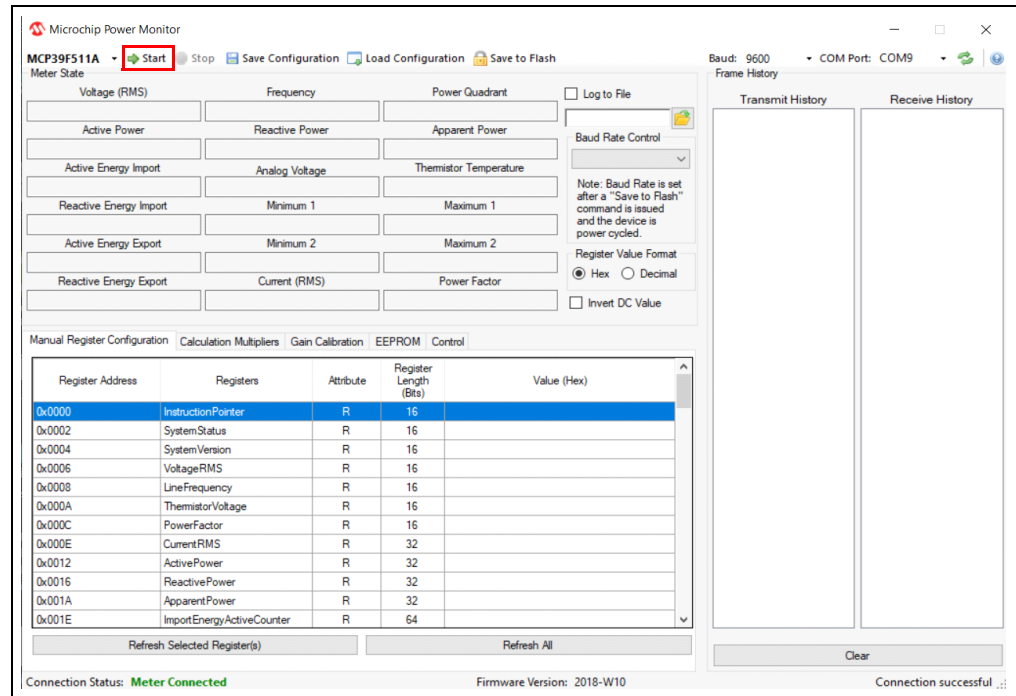


MCP39F511A CT Power Meter User's Guide

2.1.3.5 STEP 5: VERIFY DATA ACQUISITION

Once metering has started, the **Start** button turns gray and the user can see data populating the fields of the software (see the figure below).

FIGURE 2-5: MEASUREMENT OUTPUT

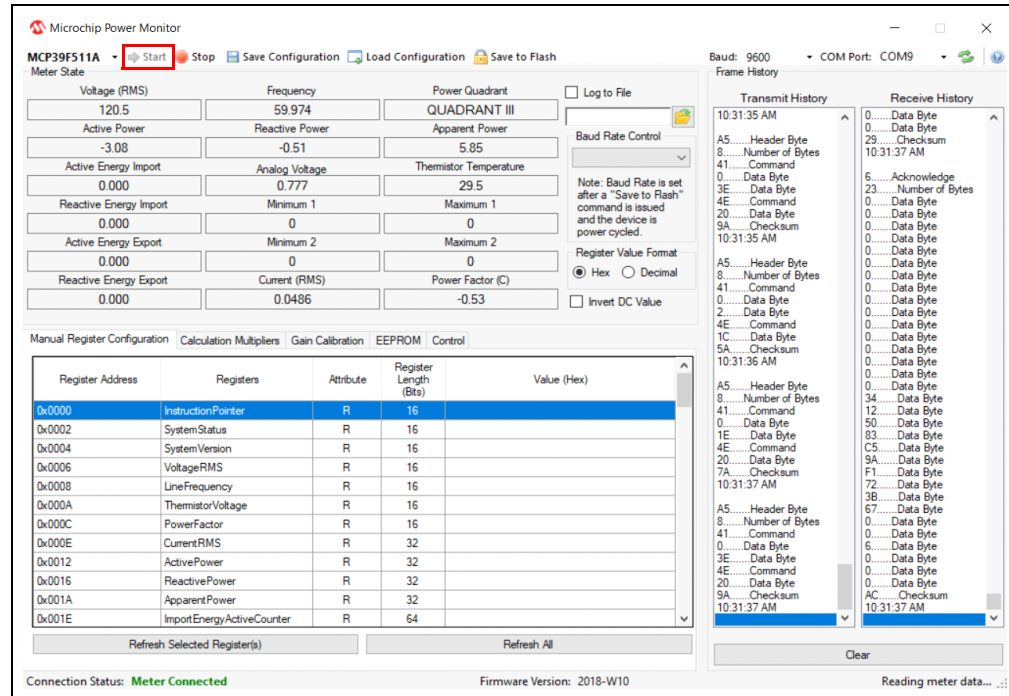

Note: The “Power Monitor Utility Software User Manual” can be found under the Help menu of the utility software.

Chapter 3. Hardware Description

3.1 BOARD DESIGN

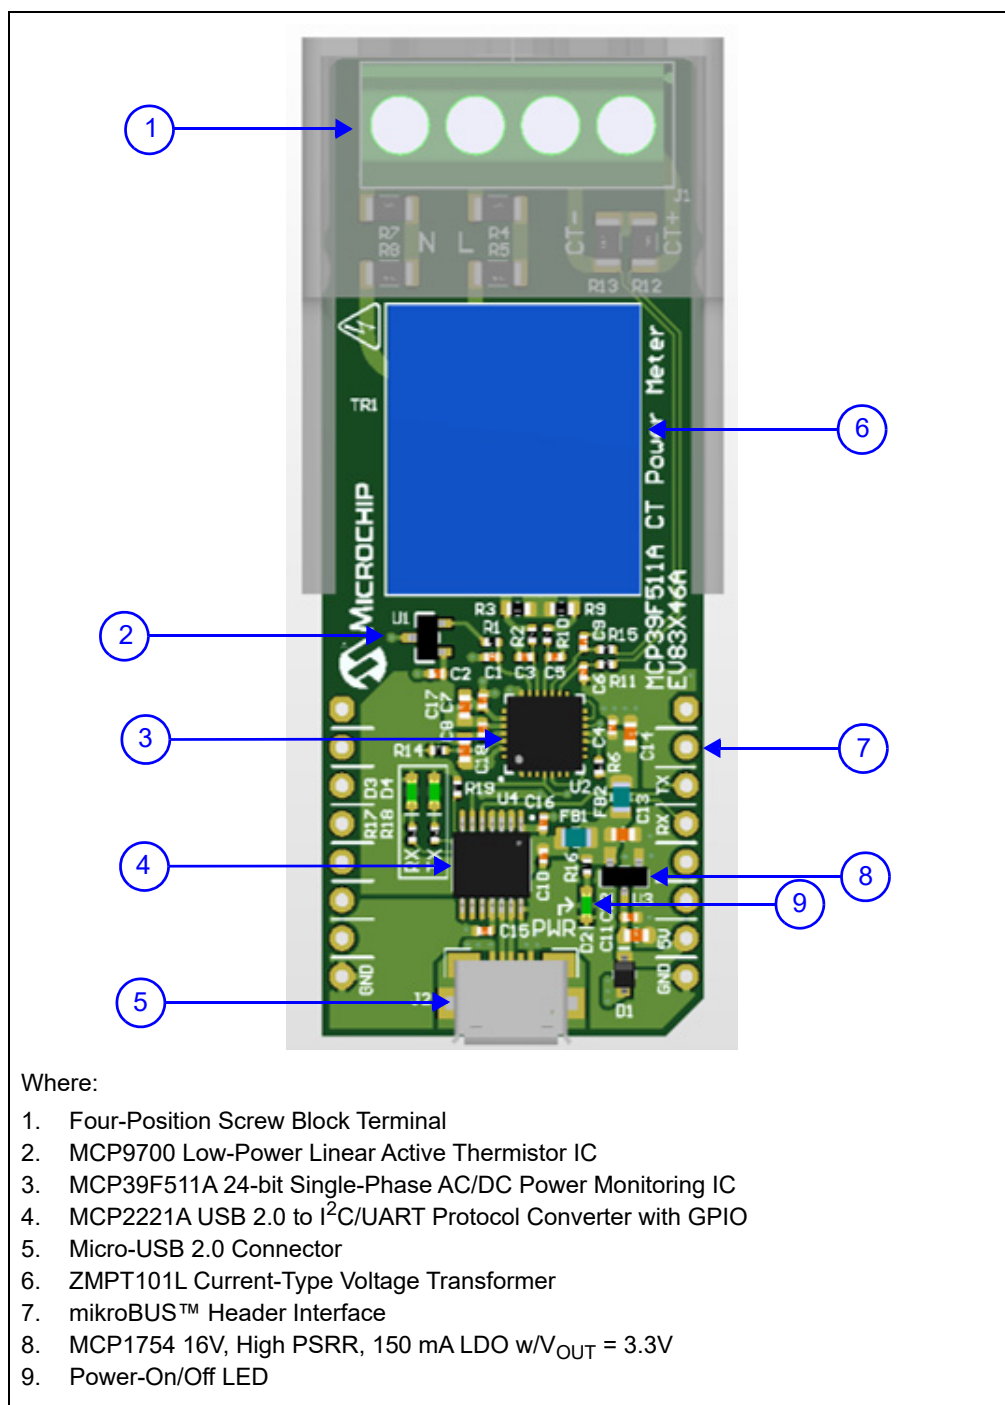


FIGURE 3-1: MCP39F511A CT Power Meter (Top View).

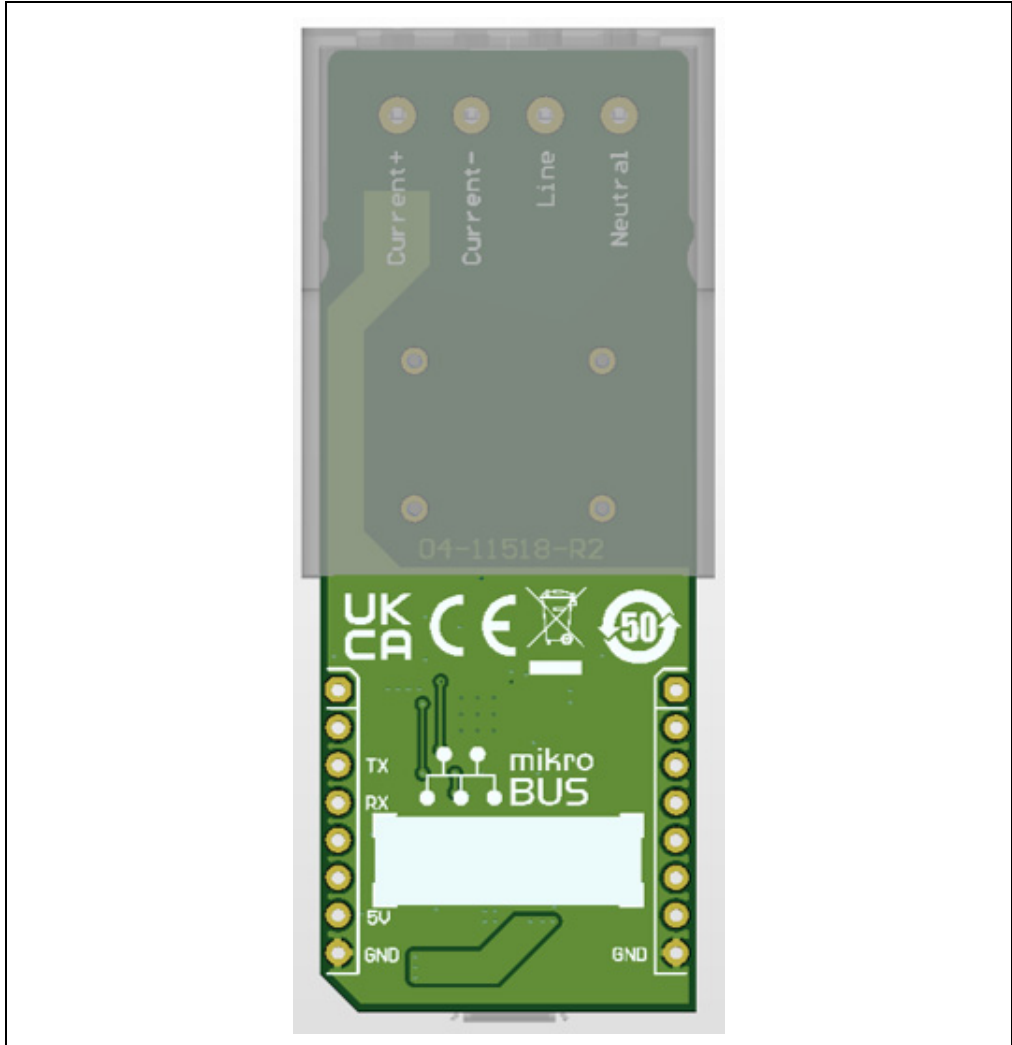


FIGURE 3-2: MCP39F511A CT Power Meter (Bottom View).

3.1.1 Power Supply

The MCP39F511A CT Power Meter is powered from a USB bus via the Micro-USB connector located at J2. The USB bus feeds an MCP1754 LDO to provide the analog (3.3V VA) and digital (3.3V VD) power supplies (see the figure below).

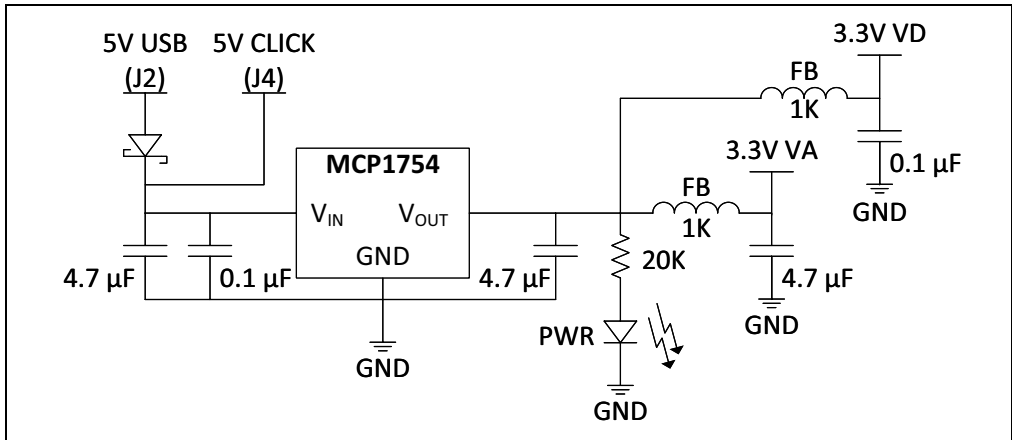


FIGURE 3-3: *Power Supply Circuitry.*

3.1.2 Analog Input and Front-End

3.1.2.1 MAINS VOLTAGE MEASUREMENT

The mains line (L) and neutral (N) connections are located at the J1 terminal block of the MCP39F511A CT Power Meter. Measurement and isolation of the mains voltage are achieved with a 1000:1000 current-type voltage transformer (ZMPT101L). The input current to the ZMPT101L is limited to a maximum of 0.7 mA (RMS) through four 100 k Ω resistors. The output current of the ZMPT101L is then converted to a voltage through a 240 Ω resistor and measured by the MCP39F511A. The maximum mains voltage supported by the MCP39F511A CT Power Meter is 395 VAC (peak, i.e., 280 VAC RMS), with a maximum output current of 0.7 mA (RMS).

Anti-Aliasing low-pass filters are inserted on each input pin of the MCP39F511A (see Figure 3-4).

3.1.2.2 CURRENT MEASUREMENT

The current transformers C+ (CT+) and C- (CT-) are located at the J1 terminal block of the MCP39F511A CT Power Meter. Measurement of the load current is achieved with a 100A:50 mA split-core current transformer (SCT013-000) supplied with the MCP39F511A CT Power Meter kit.

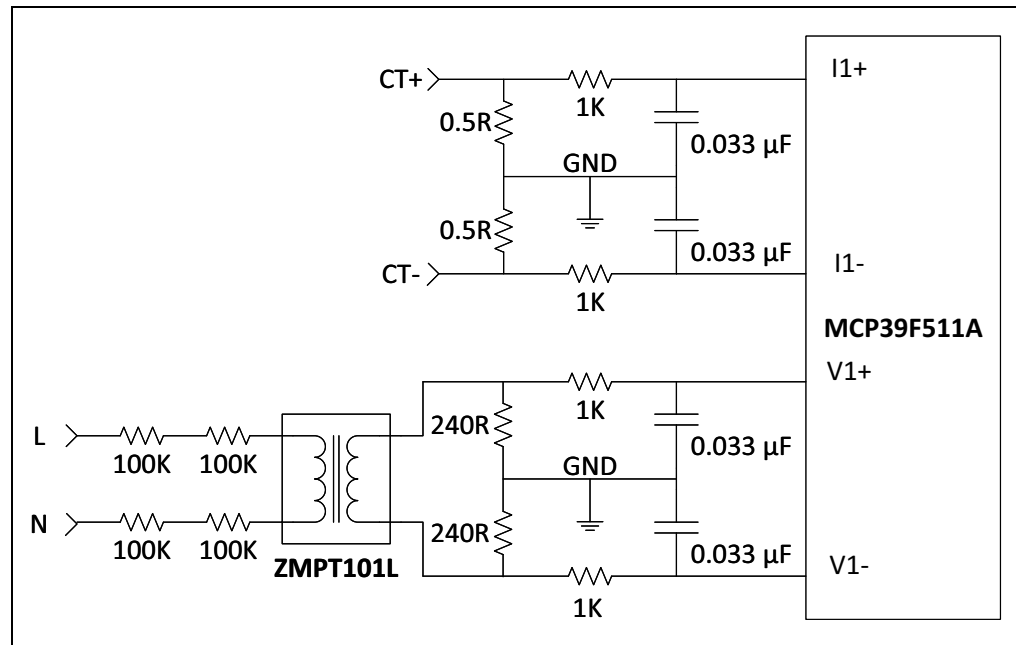


FIGURE 3-4: Analog Front-End Circuitry.

MCP39F511A CT Power Meter User's Guide

NOTES:

Chapter 4. Test Results

4.1 TEST SETUP – FLUKE 6100A ELECTRICAL POWER STANDARD

During validation of the MCP39F511A CT Power Meter, the following test data were collected on boards calibrated using a Fluke 6100A Electrical Power Standard unit.

Note: The results presented in this section are not to be considered an exhaustive characterization of PowerUC Electronics Co., Ltd. (YHDC) SCT013-000 Current Transformers.

4.1.1 Current and Power Measurements

The data in this section were collected with the SCT013-000 current transformer and the MCP39F511A CT Power Meter was calibrated at 220V, 50 Hz, 20A.

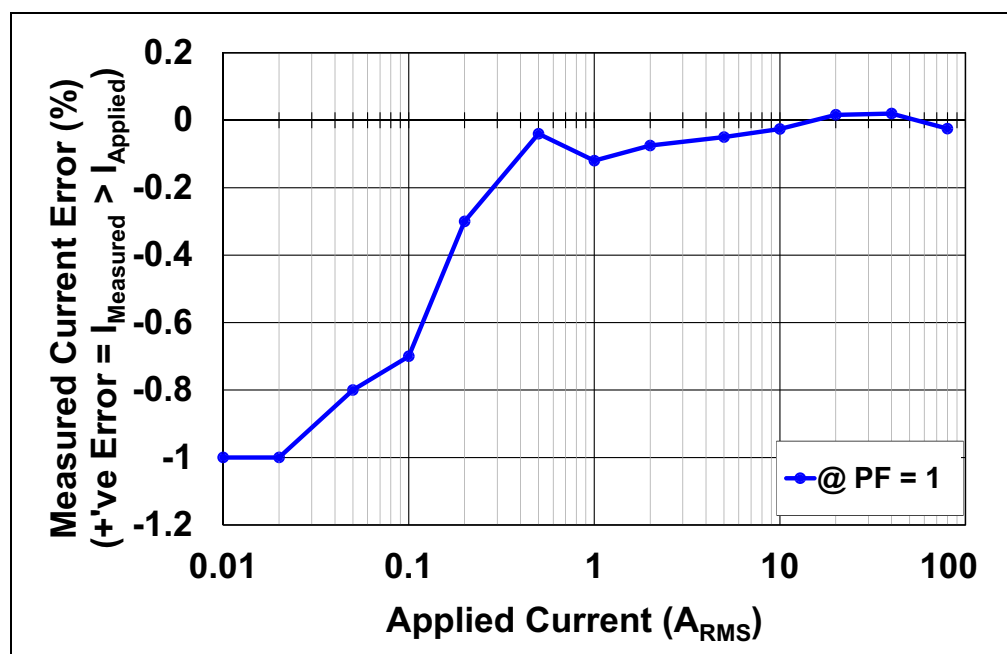


FIGURE 4-1: Current Measurement Error (%).

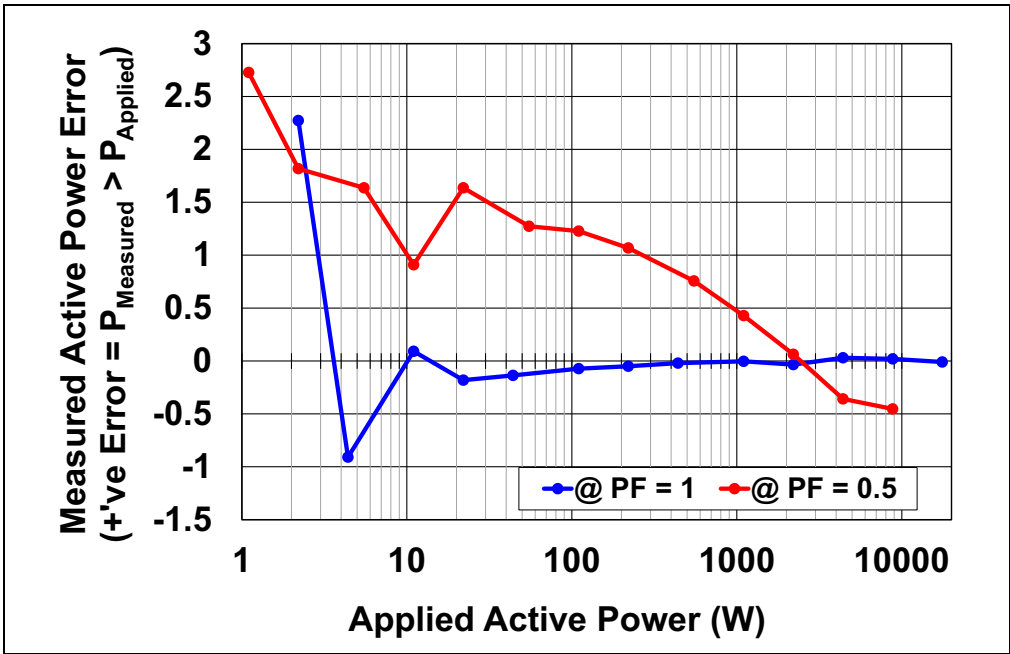


FIGURE 4-2: Active Power Measurement Error (%).

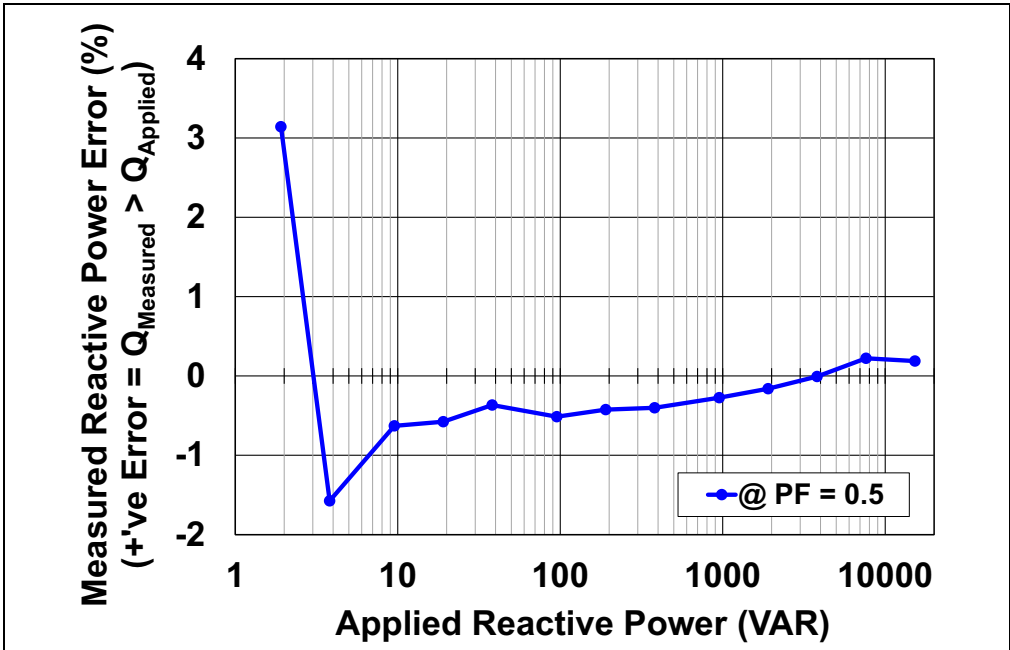


FIGURE 4-3: Reactive Power Measurement Error (%).

Appendix A. Schematics and Layouts


A.1 INTRODUCTION

This appendix contains the following schematic and layouts for the MCP39F511A CT Power Meter:


- [Board – Schematic \(Power + USB\)](#)
- [Board – Schematic \(MCP39F511A\)](#)
- [Board – Schematic \(Mechanical\)](#)
- [Board – Top Silk](#)
- [Board – Top Copper and Silk](#)
- [Board – Top Copper](#)
- [Board – Bottom Copper](#)
- [Board – Bottom Copper and Silk](#)
- [Board – Bottom Silk](#)

MCP39F511A CT Power Meter User's Guide

A.2 BOARD – SCHEMATIC (POWER + USB)

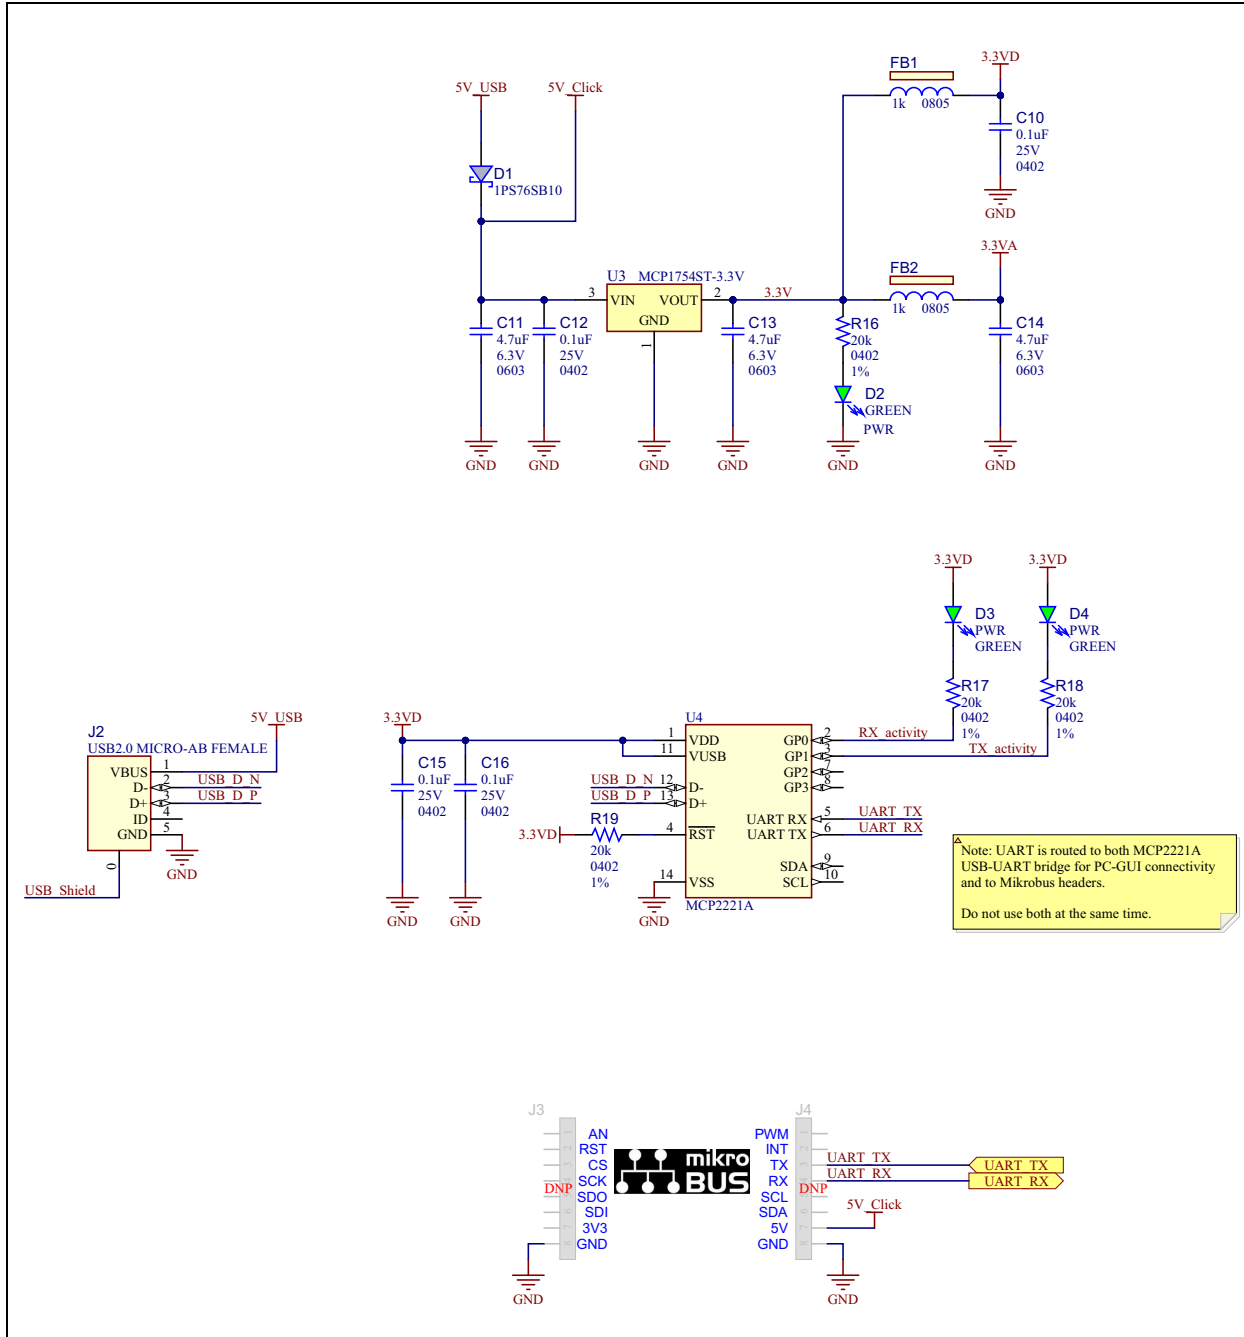

A.3 BOARD – SCHEMATIC (MCP39F511A)

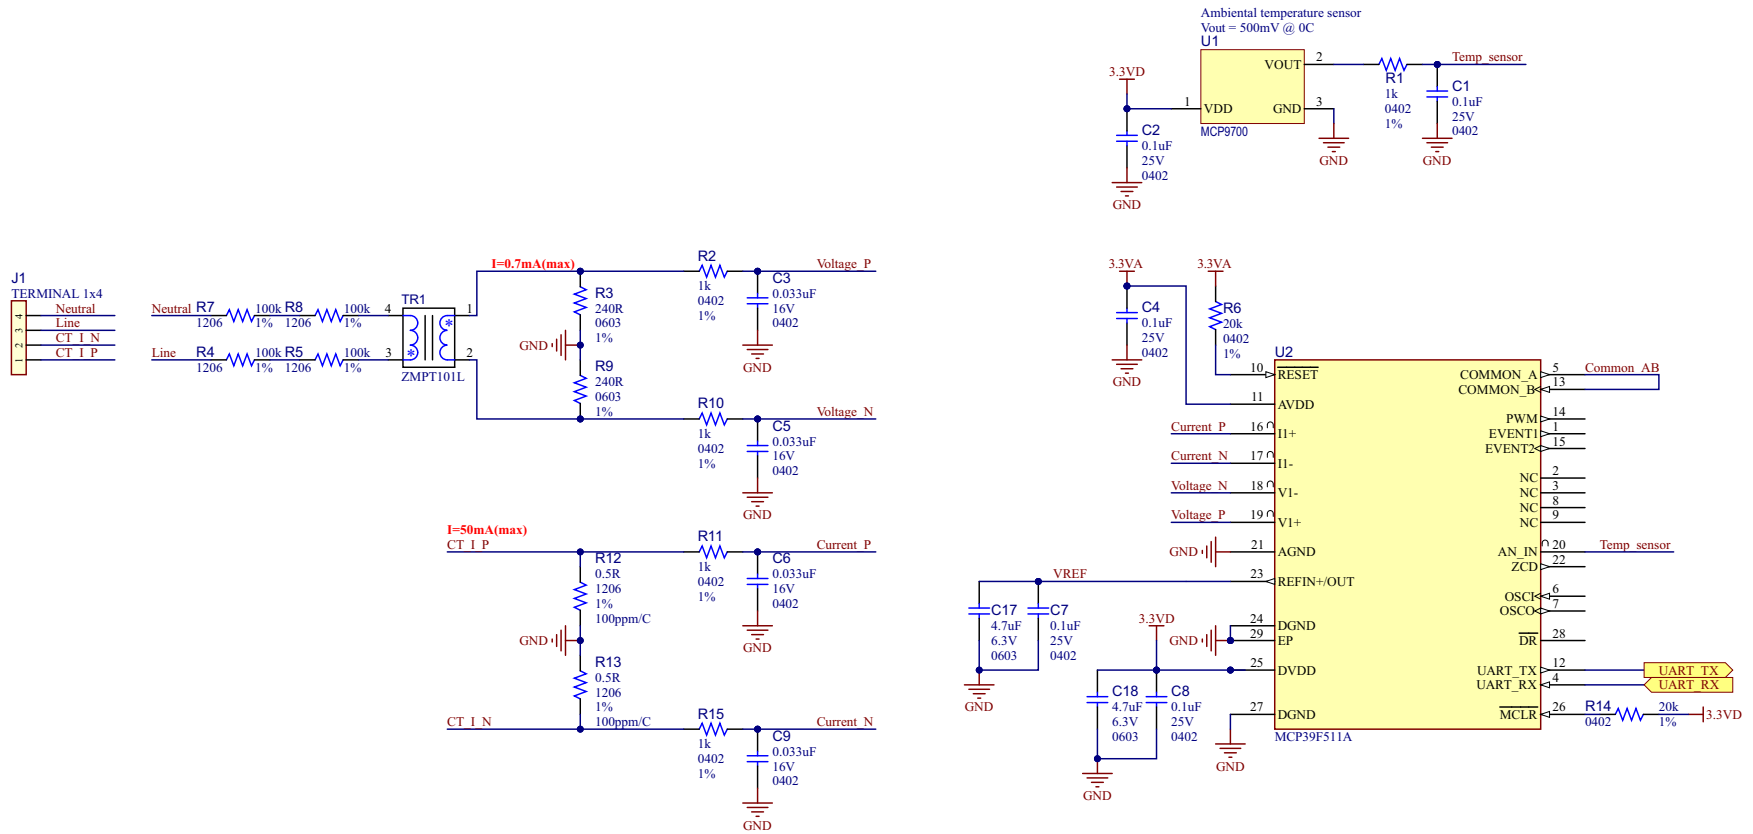

MCP39F511A CT Power Meter User's Guide

A.4 BOARD – SCHEMATIC (MECHANICAL)

SHIELD1



EV83X46A High Voltage Shield

CT1




SCT013-B84

CBL1




USB A to USB Micro-B Cable

LABEL1

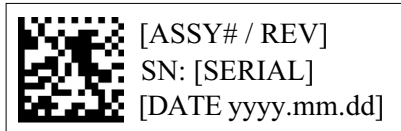


PCBA LABEL 18X6mm

A.5 BOARD – TOP SILK

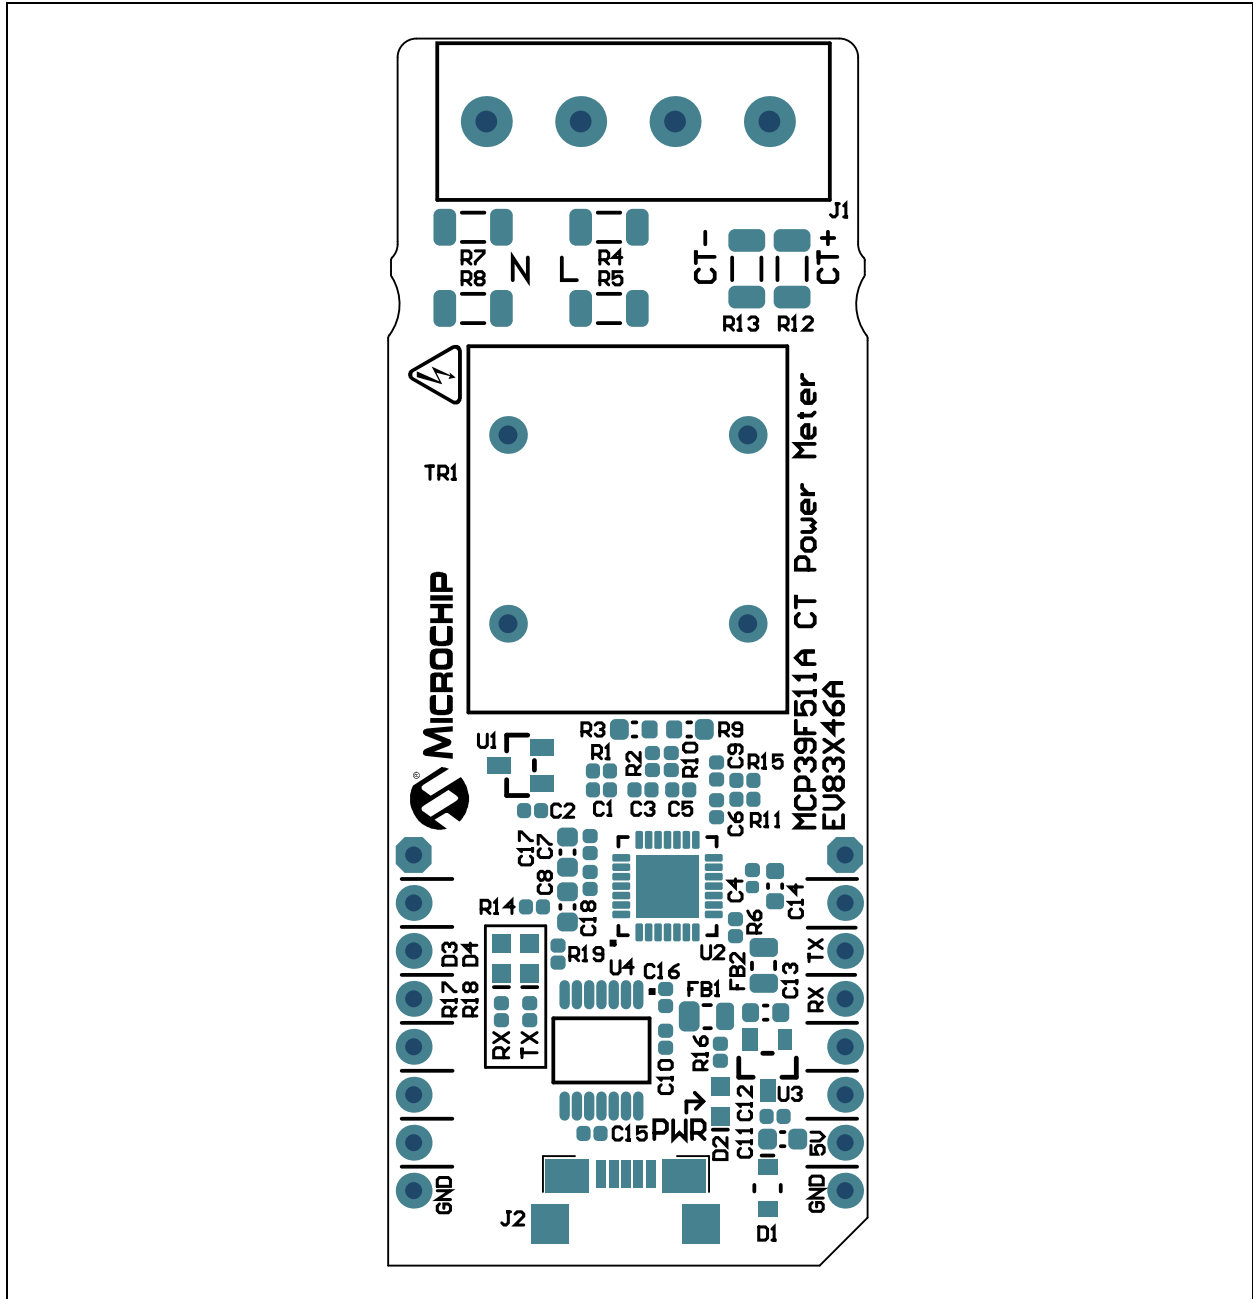


MCP39F511A CT Power Meter User's Guide

A.6 BOARD – TOP COPPER AND SILK

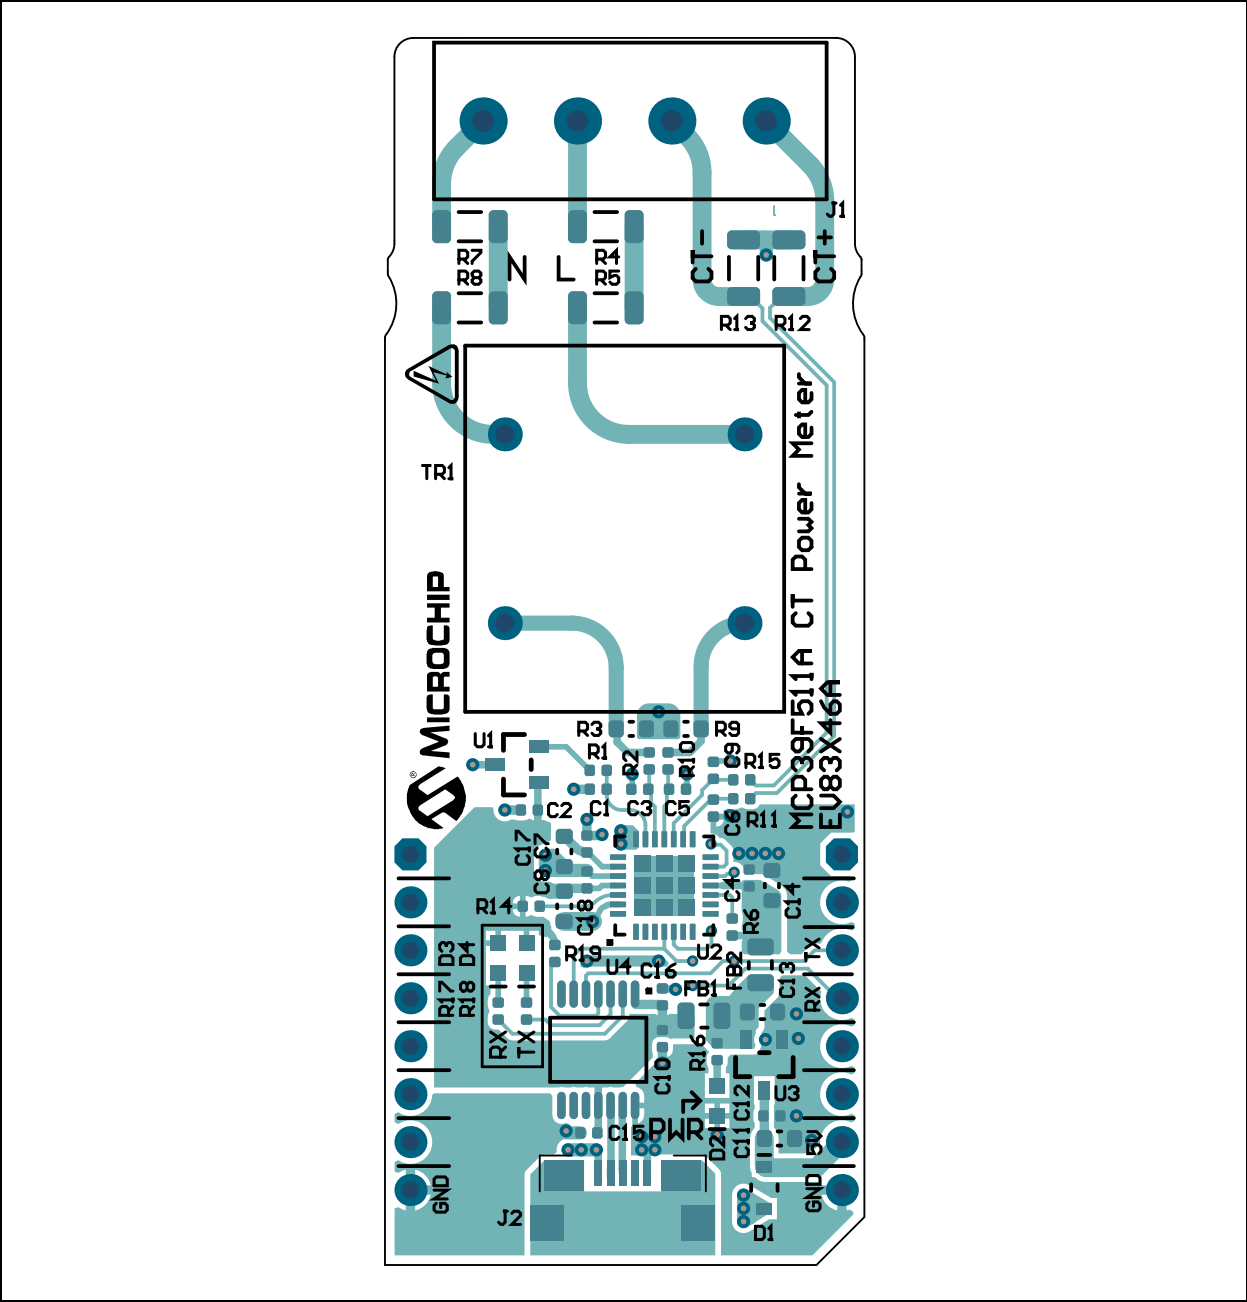


A.7 BOARD – TOP COPPER

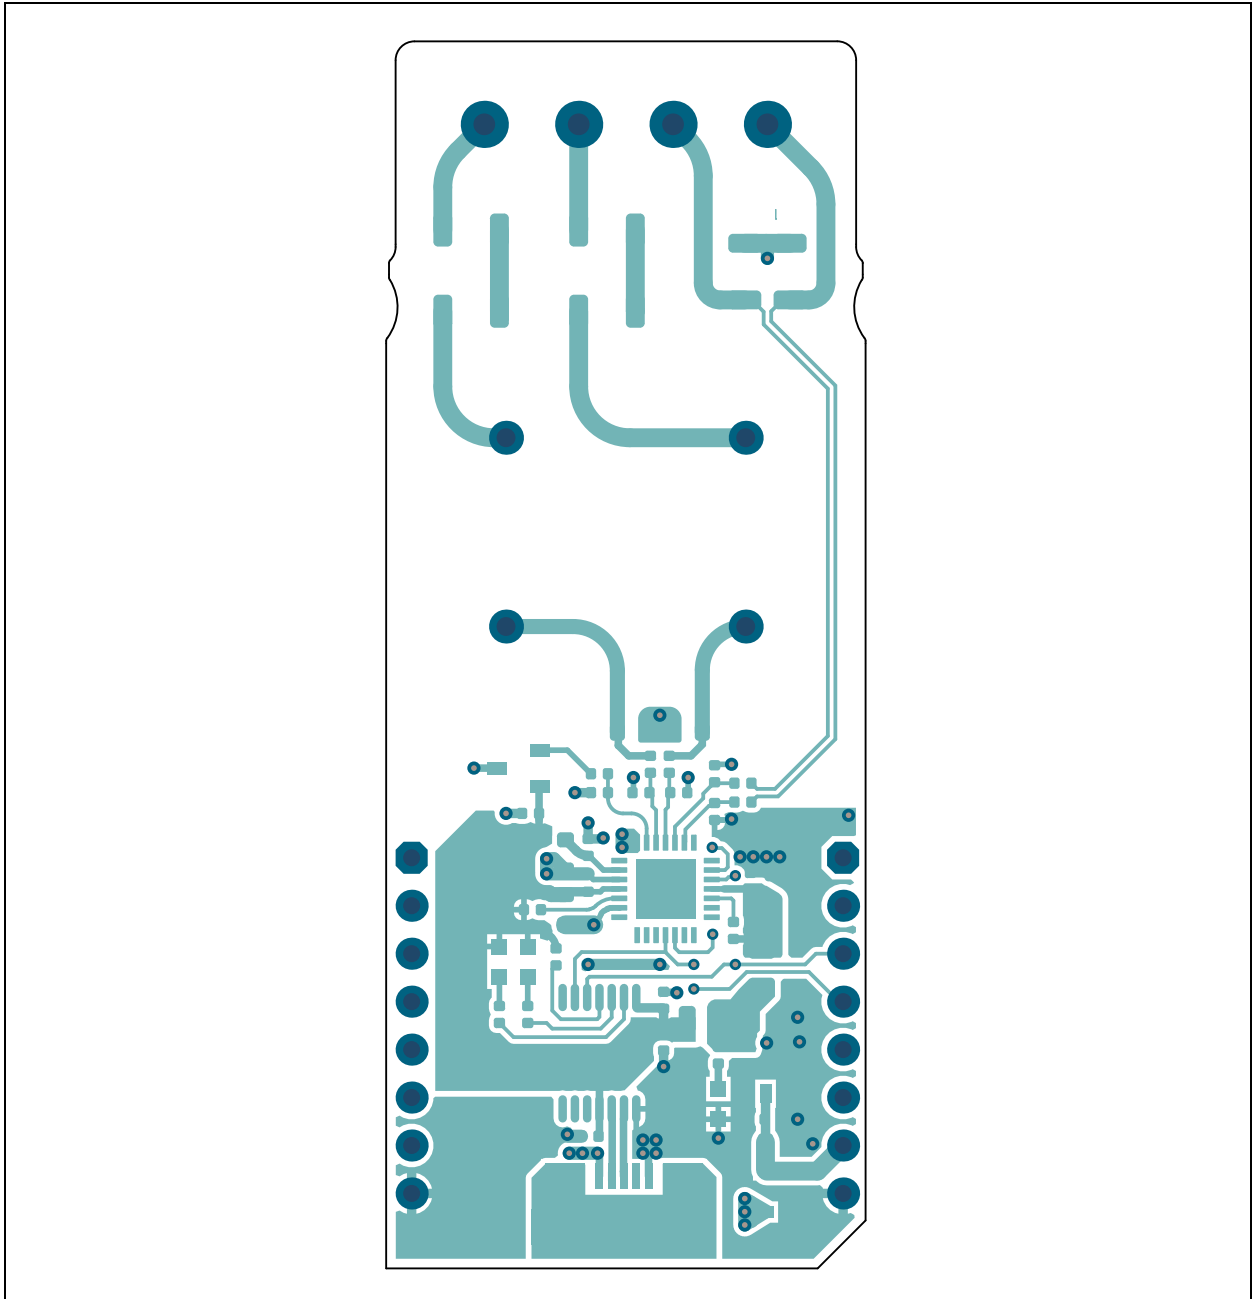


MCP39F511A CT Power Meter User's Guide

A.8 BOARD – BOTTOM COPPER

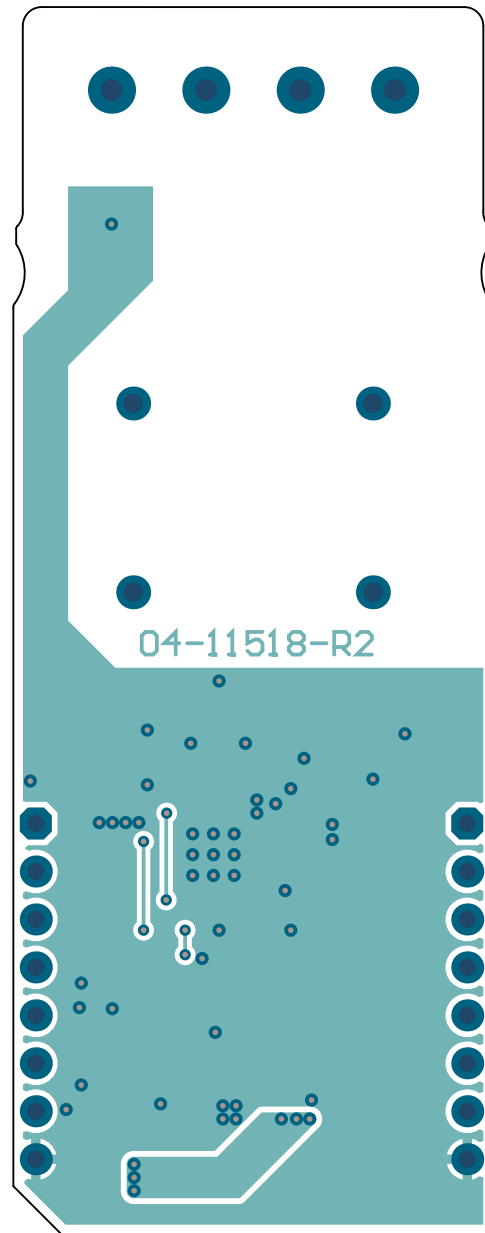


A.9 BOARD – BOTTOM COPPER AND SILK

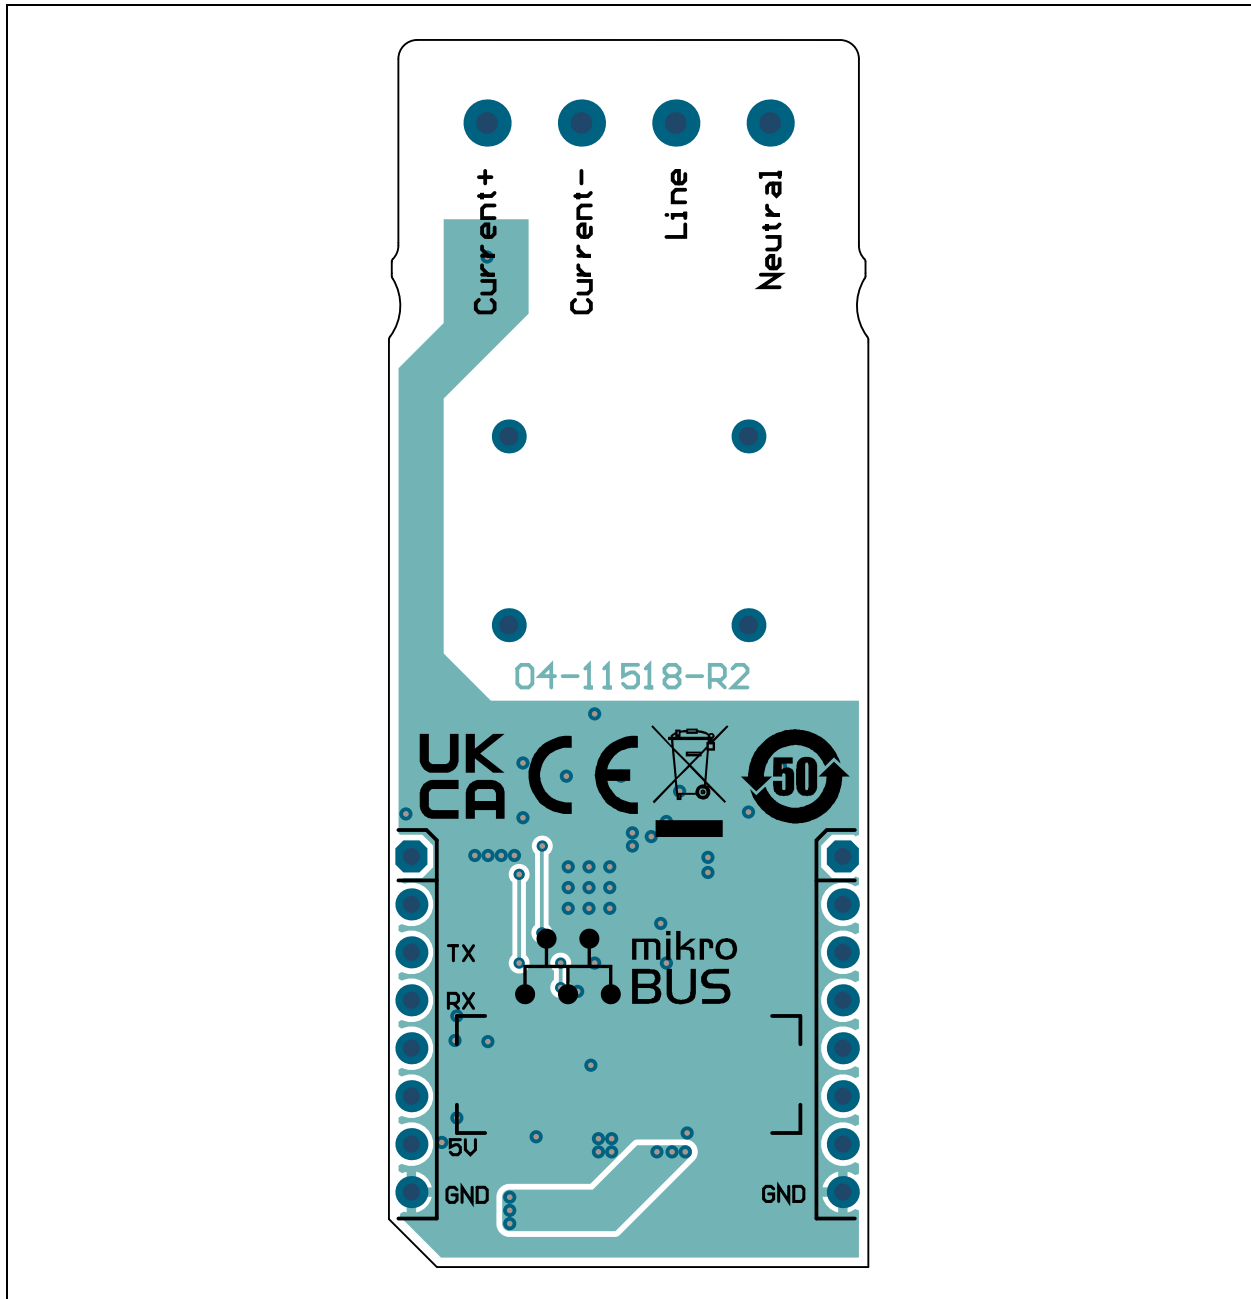

MCP39F511A CT Power Meter User's Guide

A.10 BOARD – BOTTOM SILK

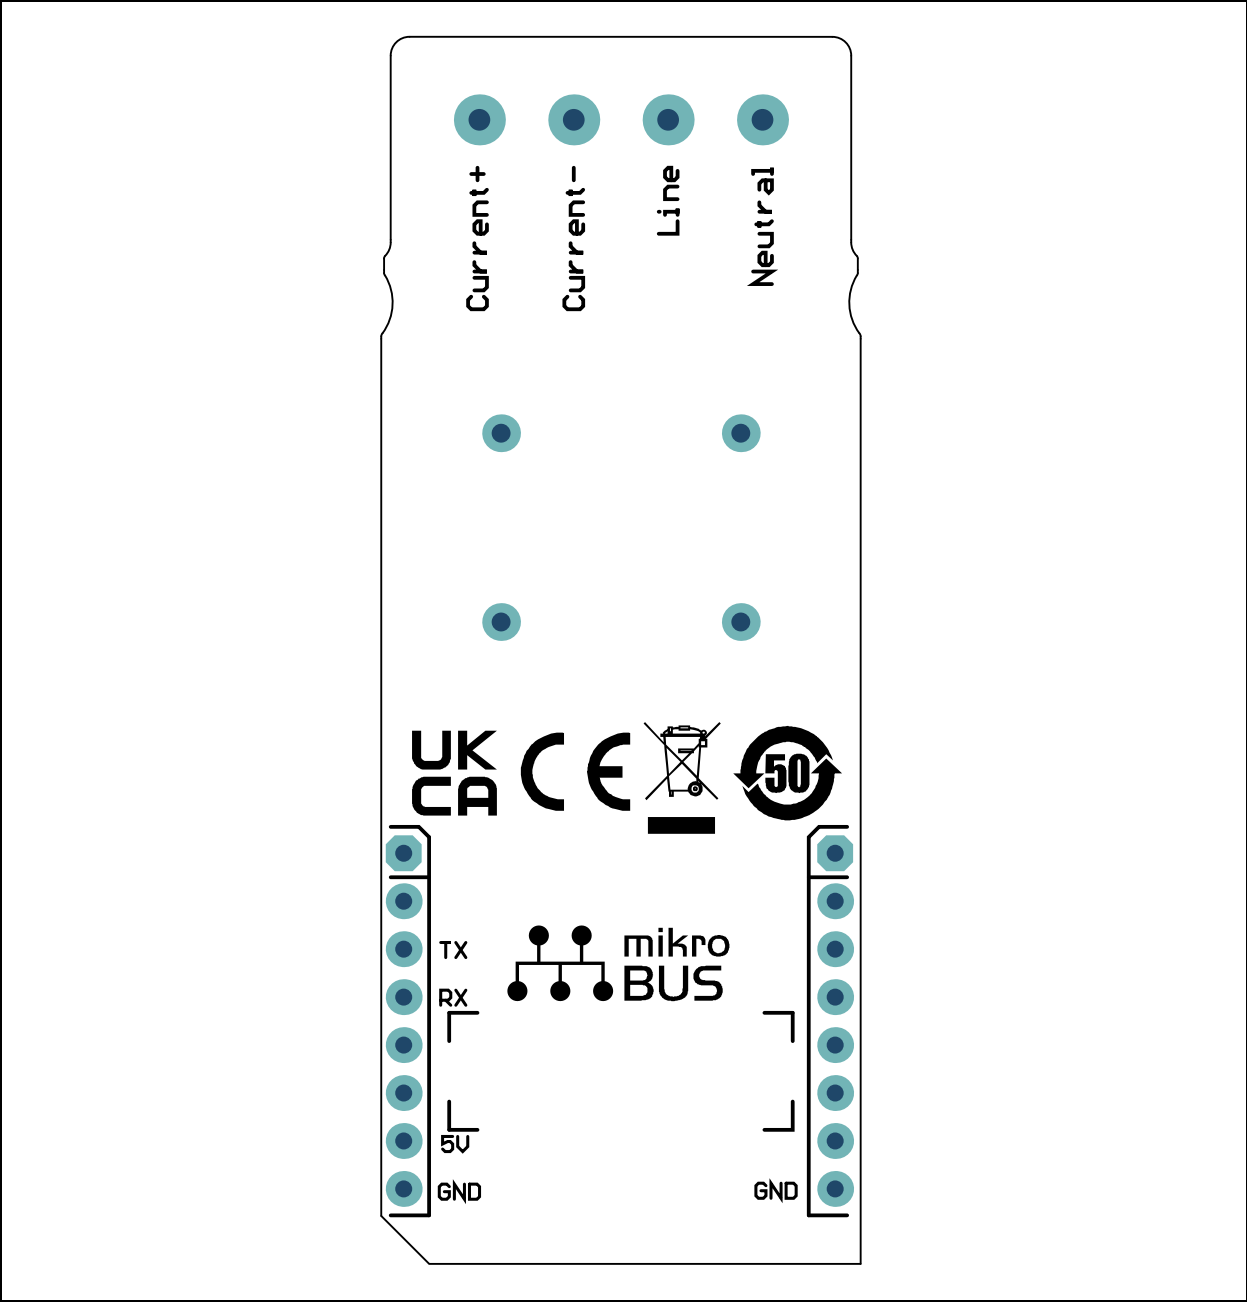

Appendix B. Bill of Materials (BOM)

TABLE B-1: BILL OF MATERIALS (BOM)

Qty.	Reference	Description	Manufacturer	Part Number
9	C1, C2, C4, C7, C8, C10, C12, C15, C16	Ceramic capacitor, 0.1 μ F, 25V, 10%, X7R, SMD, 0402	TDK Corporation	C1005X7R1E104K050BB
4	C3, C5, C6, C9	Ceramic capacitor, 0.033 μ F, 16V, 10%, X7R, SMD, 0402	Wurth Elektronik	885012205034
5	C11, C13, C14, C17, C18	Ceramic capacitor, 4.7 μ F, 6.3V, 10%, X5R, SMD, 0603	KEMET	C0603C475K9PACTU
1	CBL1	Mechanical HW Cable USB, Male, A to USB Male, Micro-B, 0.91M	Qualtek Electronics Corp.	3025030-03
1	CT1	Split Core Current Transformer, 100A to 50 mA, 50 Hz-1 kHz, 1:2000, 1% Wire to Board	Seeed Technology Co., Ltd.	SCT013-B84
1	D1	Schottky diode, 800 mV, 200 mA, 30V, SOD-323	NXP Semiconductors	1PS76SB10,115
3	D2, D3, D4	Green, LED diode, 3.2V, 20 mA, 430 mcd, Clear SMD 0603	Wurth Elektronik	150060GS75000
2	FB1, FB2	Ferrite, 1K at 100 MHz, 1.5A, SMD, 0805	TDK Corporation	MPZ2012S102AT000
1	J1	Connector Terminal, 5 mm, 1x4, Female, 14-30AWG, 10A, Through-Hole, R/A	PHOENIX CONTACT	1729034
1	J2	Connector, USB 2.0 Micro-AB, Female, SMD, R/A	Hirose Electric Co., Ltd.	ZX62-AB-5PA(31)
0	J3, J4	Connector, Header-2.54, Male, 1x8, Gold, 5.84 MH, Through-Hole	Amphenol ICC (FCI)	68001-108HLF
1	LABEL1	Label, PCBA, 18x6 mm, Datamatrix Assy#/Rev/Serial/Date	ACT Logimark AS	505462
1	PCB1	MCP39F511A CT Power Meter – Printed Circuit Board	Microchip Technology Inc.	04-11518-R2
5	R1, R2, R10, R11, R15	Resistor, Thick Film, 1 k Ω , 1%, 1/10W, SMD, 0402	Panasonic Industry Co., Ltd.	ERJ-2RKF1001X
2	R3, R9	Resistor, Thick Film, 240R, 1%, 1/10W, SMD, 0603	Yageo Corporation	RC0603FR-07240RL
4	R4, R5, R7, R8	Resistor, Thick Film, 100 k Ω , 1%, 1/4W, SMD, 1206	Panasonic Industry Co., Ltd.	ERJ-8ENF1003V
6	R6, R14, R16, R17, R18, R19	Resistor, Thick Film, 20 k Ω , 1%, 1/16W, SMD, 0402	Yageo Corporation	RC0402FR-0720KL

Note 1: The components listed in this Bill of Materials are representative of the PCB assembly. The released BOM used in manufacturing uses all RoHS-compliant components.

MCP39F511A CT Power Meter User's Guide

TABLE B-1: BILL OF MATERIALS (BOM) (CONTINUED)

Qty.	Reference	Description	Manufacturer	Part Number
2	R12, R13	Resistor, Thick Film, 0.5R, 1%, 1/2W, SMD, 1206	Stackpole Electronics, Inc.	CSR1206FKR500
1	SHIELD1	Mechanical HW 3D Printed Shield for EV83X46A	Microchip Technology Inc.	MECH0468
1	TR1	Transformer, Voltage Metering 50-400Hz, 1000:1000, 2 mA/2 mA, Through-Hole, L19.2W16.7H18.6	Qingxian Zeming Langxi Electronic Devices Co., Ltd.	ZMPT101L
1	U1	Microchip Analog Temperature Sensor, -40°C to +150°C, SOT-23-3	Microchip Technology Inc.	MCP9700T-E/TT
1	U2	Microchip Analog Energy Measurement, 4000:1, QFN-28	Microchip Technology Inc.	MCP39F511A-E/MQ
1	U3	Microchip Analog LDO, 3.3V, SOT-23A-3	Microchip Technology Inc.	MCP1754ST-3302E/CB
1	U4	Microchip Interface USB I ² C UART, TSSOP-14	Microchip Technology Inc.	MCP2221A-I/ST

Note 1: The components listed in this Bill of Materials are representative of the PCB assembly. The released BOM used in manufacturing uses all RoHS-compliant components.

Worldwide Sales and Service

AMERICAS

Corporate Office
2355 West Chandler Blvd.
Chandler, AZ 85224-6199
Tel: 480-792-7200
Fax: 480-792-7277
Technical Support:
<http://www.microchip.com/support>
Web Address:
www.microchip.com

Atlanta
Duluth, GA
Tel: 678-957-9614
Fax: 678-957-1455

Austin, TX
Tel: 512-257-3370

Boston
Westborough, MA
Tel: 774-760-0087
Fax: 774-760-0088

Chicago
Itasca, IL
Tel: 630-285-0071
Fax: 630-285-0075

Dallas
Addison, TX
Tel: 972-818-7423
Fax: 972-818-2924

Detroit
Novi, MI
Tel: 248-848-4000

Houston, TX
Tel: 281-894-5983

Indianapolis
Noblesville, IN
Tel: 317-773-8323
Fax: 317-773-5453
Tel: 317-536-2380

Los Angeles
Mission Viejo, CA
Tel: 949-462-9523
Fax: 949-462-9608
Tel: 951-273-7800

Raleigh, NC
Tel: 919-844-7510

New York, NY
Tel: 631-435-6000

San Jose, CA
Tel: 408-735-9110
Tel: 408-436-4270

Canada - Toronto
Tel: 905-695-1980
Fax: 905-695-2078

ASIA/PACIFIC

Australia - Sydney
Tel: 61-2-9868-6733

China - Beijing
Tel: 86-10-8569-7000

China - Chengdu
Tel: 86-28-8665-5511

China - Chongqing
Tel: 86-23-8980-9588

China - Dongguan
Tel: 86-769-8702-9880

China - Guangzhou
Tel: 86-20-8755-8029

China - Hangzhou
Tel: 86-571-8792-8115

China - Hong Kong SAR
Tel: 852-2943-5100

China - Nanjing
Tel: 86-25-8473-2460

China - Qingdao
Tel: 86-532-8502-7355

China - Shanghai
Tel: 86-21-3326-8000

China - Shenyang
Tel: 86-24-2334-2829

China - Shenzhen
Tel: 86-755-8864-2200

China - Suzhou
Tel: 86-186-6233-1526

China - Wuhan
Tel: 86-27-5980-5300

China - Xian
Tel: 86-29-8833-7252

China - Xiamen
Tel: 86-592-2388138

China - Zhuhai
Tel: 86-756-3210040

ASIA/PACIFIC

India - Bangalore
Tel: 91-80-3090-4444

India - New Delhi
Tel: 91-11-4160-8631

India - Pune
Tel: 91-20-4121-0141

Japan - Osaka
Tel: 81-6-6152-7160

Japan - Tokyo
Tel: 81-3-6880-3770

Korea - Daegu
Tel: 82-53-744-4301

Korea - Seoul
Tel: 82-2-554-7200

Malaysia - Kuala Lumpur
Tel: 60-3-7651-7906

Malaysia - Penang
Tel: 60-4-227-8870

Philippines - Manila
Tel: 63-2-634-9065

Singapore
Tel: 65-6334-8870

Taiwan - Hsin Chu
Tel: 886-3-577-8366

Taiwan - Kaohsiung
Tel: 886-7-213-7830

Taiwan - Taipei
Tel: 886-2-2508-8600

Thailand - Bangkok
Tel: 66-2-694-1351

Vietnam - Ho Chi Minh
Tel: 84-28-5448-2100

EUROPE

Austria - Wels
Tel: 43-7242-2244-39
Fax: 43-7242-2244-393

Denmark - Copenhagen
Tel: 45-4485-5910
Fax: 45-4485-2829

Finland - Espoo
Tel: 358-9-4520-820

France - Paris
Tel: 33-1-69-53-63-20
Fax: 33-1-69-30-90-79

Germany - Garching
Tel: 49-8931-9700

Germany - Haan
Tel: 49-2129-3766400

Germany - Heilbronn
Tel: 49-7131-72400

Germany - Karlsruhe
Tel: 49-721-625370

Germany - Munich
Tel: 49-89-627-144-0
Fax: 49-89-627-144-44

Germany - Rosenheim
Tel: 49-8031-354-560

Israel - Ra'anana
Tel: 972-9-744-7705

Italy - Milan
Tel: 39-0331-742611
Fax: 39-0331-466781

Italy - Padova
Tel: 39-049-7625286

Netherlands - Drunen
Tel: 31-416-690399
Fax: 31-416-690340

Norway - Trondheim
Tel: 47-7288-4388

Poland - Warsaw
Tel: 48-22-3325737

Romania - Bucharest
Tel: 40-21-407-87-50

Spain - Madrid
Tel: 34-91-708-08-90
Fax: 34-91-708-08-91

Sweden - Gothenberg
Tel: 46-31-704-60-40

Sweden - Stockholm
Tel: 46-8-5090-4654

UK - Wokingham
Tel: 44-118-921-5800
Fax: 44-118-921-5820