


ROHS COMPLIANT

PRODUCT DATA DRAWING

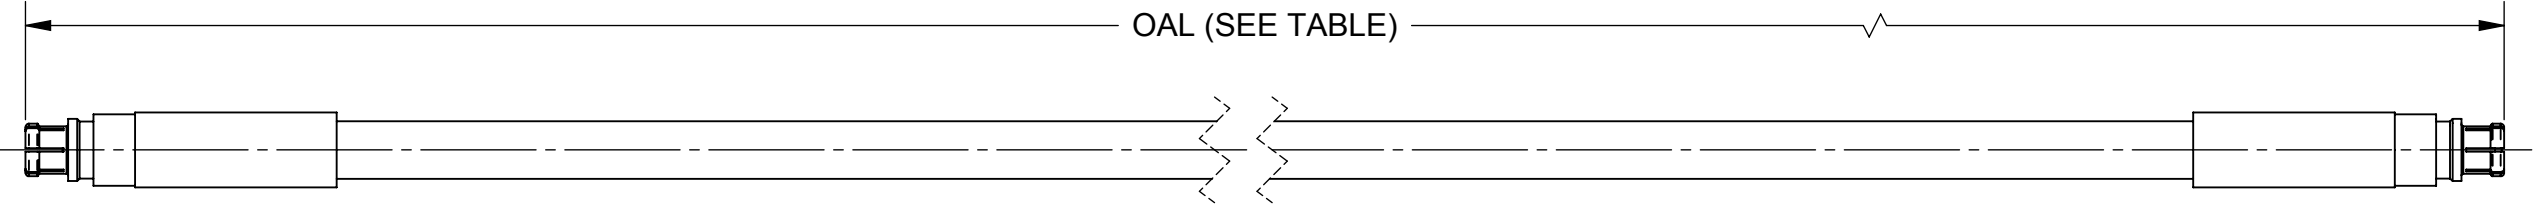

MATERIAL:

CONNECTIONS:

CABLE:

SHRINK TUBING:

PERFORMANCE:

IMPEDANCE:

FREQ. RANGE:

SEE NOTES

2X SMPM STRAIGHT FEMALE (3221-40006)


T-FLEX 405 (200-70-139)

M23053/5

50 OHMS

DC TO 40.0 GHz

SV P/N		L(OAL)	
7032-7153		(6.000")	
7032-7154		(12.000")	
7032-7155		(24.000")	

MATERIAL: SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES:		UNLESS OTHERWISE SPECIFIED 1) ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) 2) ALL DIMENSIONS ARE AFTER PLATING. 3) BREAK CORNERS & EDGES .005 R. MAX. 4) CHAM. 1ST & LAST THREADS. 5) SURFACE ROUGHNESS 63 MIL-STD-10. 6) DIA.'S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R. 7) REMOVE ALL BURRS	SV MICROWAVE Amphenol 2400 Centrepark West Drive, Suite 100 West Palm Beach, FL 33409 TITLE: SMPM FEMALE TO SMPM FEMALE FOR .085 CABLE ASSEMBLY		
	FINISH: SEE NOTES	FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' X°X' ±15'				
	SURFACE AREA: N/A	DECIMAL: .X ±.030 .XX ±.010 .XXX ±.005				
	PROPRIETARY	INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994				
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SV MICROWAVE, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SV MICROWAVE, INC IS PROHIBITED.		THIRD ANGLE PROJECTION		DRAWN: VB 06/05/17		
				CHECKED: GPF 06/05/17		
				APPROVED: GPF 06/05/17		

SIZE B		CAGE CODE 95077		DWG. NO. 7032-7153-7154-7155	
SCALE: 1:1					SHEET 1 OF 1