

# SS-5F

# Fast-acting subminiature fuse



#### **Product features**

- · Fast-acting subminiature fuse
- Designed to UL 248-14
- Plastic cap and base, flammability UL 94V0
- 8.7 mm x 4.5 mm through hole package in a 8.05 mm height
- Protects against harmful overcurrents in primary and secondary applications
- Small radial-leaded design utilizes less board space
- Rated up to 250 Vac

#### **Applications**

Primary and secondary circuit protection:

- · Power supplies
- · Notebooks and laptops
- · Appliances and white goods
- · Lighting ballasts
- · Power adapters
- · Set top boxes
- · LED/LCD televisions and displays
- · Air conditioners
- · Battery chargers

#### **Agency information**

- cULus: Recognition file number E19180, Guide JDYX/JDYX7
- PSE: JET 1641-31007-1001, JET 1641- 31007-1002

#### **Ordering**

• Use ordering number (see page 4 for details)

## **Packaging suffixes**

- -BK (200 parts in polybag, Lead L= 4.3 ±0.3 mm)
- -BK2 (200 parts in polybag, Lead L= 21 ±3.0 mm)
- -AP (1000 parts Ammo pack, Pitch =12.7 mm)



## **Electrical characteristics**

<u>I</u> n	1l min hour	1.5l <sub>n</sub> max minute	2In max ms	
800 mA - 10 A	4	10	2	

## **Product specifications**

Part number⁵	Current rating (A)	Voltage rating (V <sub>AC</sub> )	Interrupting rating at rated voltage <sup>1</sup> (50 Hz) AC (A <sub>AC</sub> )	Typical DC cold resistance $^2$ (m $\Omega$ )	Typical melting³ I²t (A²s)	Typical voltage drop⁴ (mV)	cULus	PSE+
SS-5F-800mA	0.8	250	50	225	1.24	300	Χ	
SS-5F-1A	1.0	250	50	165.5	2.22	279	Χ	Χ
SS-5F-1.25A	1.25	250	50	116.5	3.83	244	Χ	Χ
SS-5F-1.6A	1.6	250	50	76	6.42	210	Χ	Χ
SS-5F-2A	2.0	250	50	55.5	9.35	194	Χ	Χ
SS-5F-2.5A	2.5	250	50	46	14.0	201	Χ	Χ
SS-5F-3.15A	3.15	250	50	31.5	22.5	168	Χ	Χ
SS-5F-4A	4.0	250	50	22.25	33.6	154	Χ	Χ
SS-5F-5A	5.0	250	50	16	53.7	154	Χ	Χ
SS-5F-6.3A	6.3	125	50	14.5	74.3	157	Χ	Χ
SS-5F-7A	7.0	125	50	11.4	107	133	Χ	Χ
SS-5F-8A	8.0	125	50	9.9	107	133	Χ	Χ
SS-5F-10A	10	125	50	6.5	146	109	Χ	Х


- 1. Interrupting ratings: 800 mA to 10 A measured at 50 A, 95%-100% of PF on AC
- 2. Typical cold resistance measured at <10% of rated current
- 3. I2t value measured at 10I
- 4. Typical voltage drop measured at 20 °C ambient temperature at rated current
- 5. Part number definition: SS-5F-xxxA


SS-5F= Product code


xxxA= Ampere rating

xxxmA= Milliampere rating


## Dimensions and packaging- mm [in]

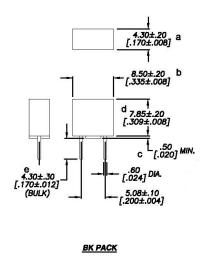



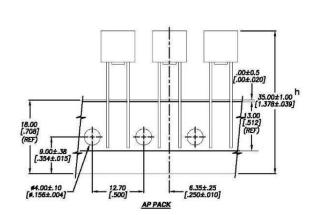


Time vs. current curve

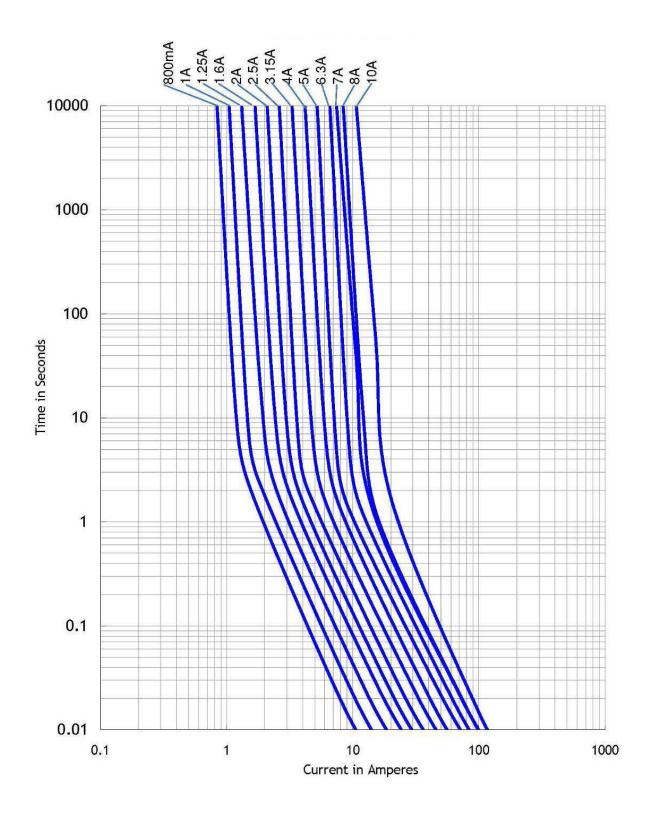

## Temperature derating curve

Normal Operating Temperature: 25 °C ± 2 °C

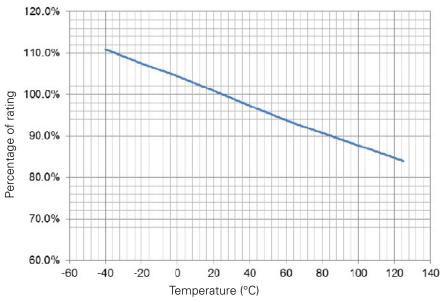

# **General specifications**

Operating temperature: -40 °C to +125 °C (with derating)
Storage temperature: -10 °C to +40 °C
Solderability: EIA-186-9E Method 9
High Frequency Vibration: Withstands 10 Hz to 55 Hz per MII -STD-202F Method 201A

# **Ordering codes**

The ordering code is the part number replacing the "" with a "-" plus adding the packaging suffix.


# **Packaging suffix**

- -BK (200 parts in polybag, Lead L= 4.3 ±0.3 mm)
- -BK2 (200 parts in polybag, Lead L= 21 ±3.0 mm)
- -AP (1000 parts Ammo pack, Pitch =12.7 mm)

## **Ordering Code**

Part number	-BK option	-BK2 option	-AP option	
SS-5F-800mA	SS-5F-800mA-BK	SS-5F-800mA-BK2	SS-5F-800mA-AP	
SS-5F-1A	SS-5F-1A-BK	SS-5F-1A-BK2	SS-5F-1A-AP	
SS-5F-1.25A	SS-5F-1-25A-BK	SS-5F-1-25A-BK2	SS-5F-1-25A-AP	
SS-5F-1.6A	SS-5F-1-6A-BK	SS-5F-1-6A-BK2	SS-5F-1-6A-AP	
SS-5F-2A	SS-5F-2A-BK	SS-5F-2A-BK2	SS-5F-2A-AP	
SS-5F-2.5A	SS-5F-2-5A-BK	SS-5F-2-5A-BK2	SS-5F-2-5A-AP	
SS-5F-3.15A	SS-5F-3-15A-BK	SS-5F-3-15A-BK2	SS-5F-3-15A-AP	
SS-5F-4A	SS-5F-4A-BK	SS-5F-4A-BK2	SS-5F-4A-AP	
SS-5F-5A	SS-5F-5A-BK	SS-5F-5A-BK2	SS-5F-5A-AP	
SS-5F-6.3A	SS-5F-6-3A-BK	SS-5F-6-3A-BK2	SS-5F-6-3A-AP	
S-5F-7A SS-5F-7A-BK		SS-5F-7A-BK2	SS-5F-7A-AP	
SS-5F-8A	SS-5F-8A-BK	SS-5F-8A-BK2	SS-5F-8A-AP	
SS-5F-10A	SS-5F-10A-BK	SS-5F-10A-BK2	SS-5F-10A-AP	
		,		

#### Wave solder profile

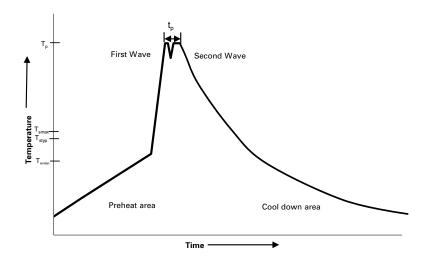

#### Reference EN 61760-1:2006

<b>Profile Feat</b>	ture	Standard SnPb Solder	Lead (Pb) Free Solder
Preheat	• Temperature min. (T <sub>smin</sub> )	100 °C	100 °C
	• Temperature typ. (T <sub>Styp</sub> )	120 °C	120 °C
	• Temperature max. (T <sub>smax</sub> )	130 °C	130 °C
	• Time (T <sub>smin</sub> to T <sub>smax</sub> ) (t <sub>s</sub> )	70 seconds	70 seconds
$\Delta$ preheat to max Temperature		150 °C max.	150 °C max.
Peak tempera	iture (Tp)*	235 °C to 260 °C	250 °C to 260 °C
Time at peak temperature (t <sub>p</sub> )		10 seconds max 5 seconds max each wave	10 seconds max 5 seconds max each wave
Ramp-down r	ate	~ 2 K/s min ~3.5 K/s typ ~5 K/s max	~ 2 K/s min ~3.5 K/s typ ~5 K/s max
Time 25 °C to 25 °C		4 minutes	4 minutes

## Manual solder

350 °C, 4-5 seconds (by soldering iron), generally manual hand soldering is not recommended.

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin.

Eaton
Electronics Division

1000 Eaton Boulevard Cleveland, OH 44122 United States www.eaton.com/electronics

© 2022 Eaton All Rights Reserved Printed in USA Publication No. 2622 May 2022

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

Follow us on social media to get the latest product and support information.









