

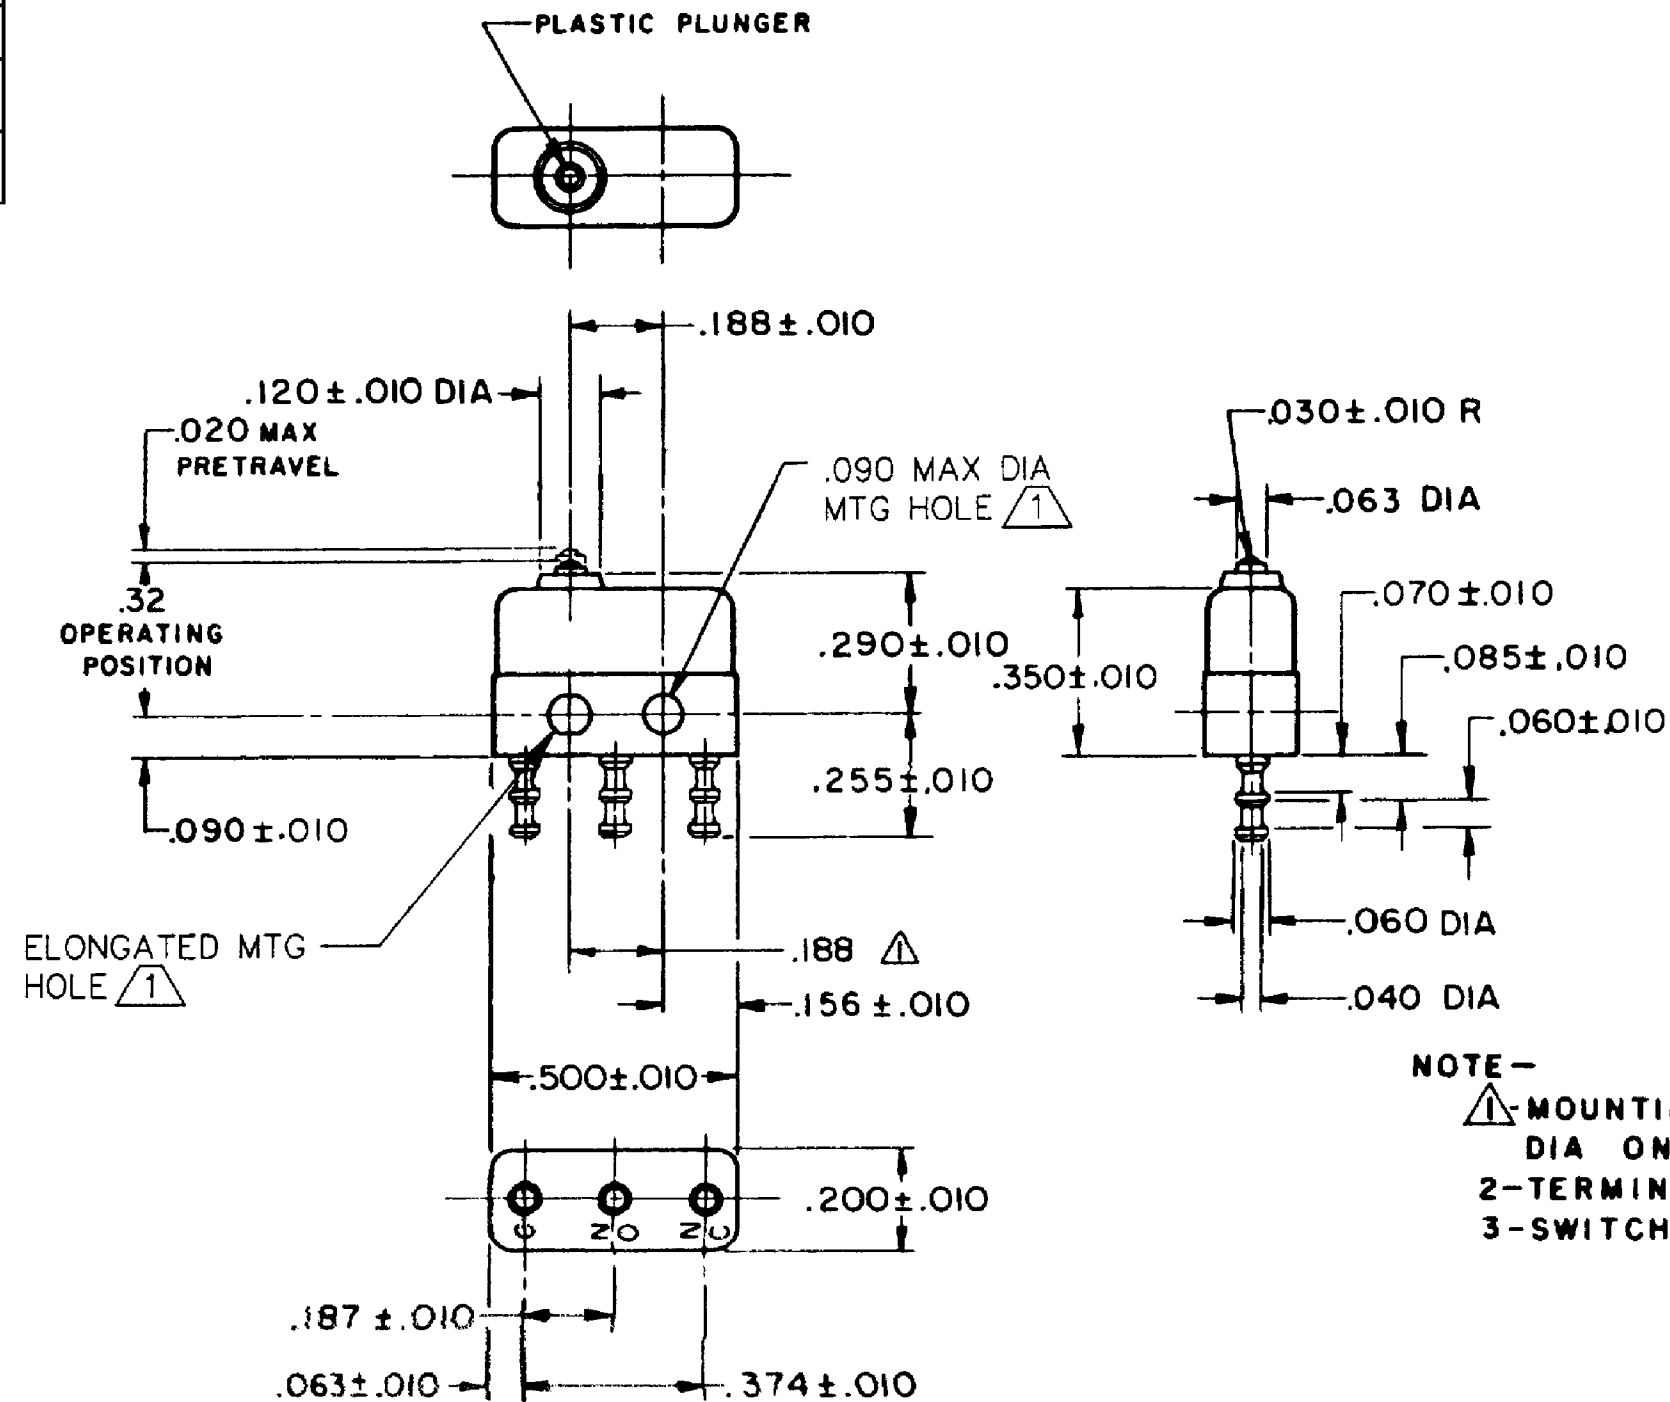
HONEYWELL
PART NUMBER

1SX1-T2

PRODUCT CODE
VDA0200

JG-80900

REV	DOCUMENT	CHANGED BY	CHECK
8	0038446	KVB 20MAY08	BLR

RELEASE NO.
SR11994REPLACES
-

CHARACTERISTICS

OPERATING FORCE - - - - 5 OZ MAX

RELEASE FORCE - - - - - 1 OZ MIN

DIFFERENTIAL TRAVEL - - - .005 MAX

OVERTRAVEL - - - - - .004 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
SPDT

28 VOLTS DC RATING

	SEA LEVEL	50,000 FT
INDUCTIVE	4 AMP	2.5 AMP
RESISTIVE	7 AMP	7 AMP

MAXIMUM INRUSH 24 AMP

APPROVALS	KEMA, CE	7A 250V~ T125 5E4	CE
	UL, CSA	7A 250 VAC	UL

DESIGN UNITS: INCH

TOLERANCES UNLESS NOTED:

NO PLACE	X	±
ONE PLACE	.X	±
TWO PLACE	.XX	±
THREE PLACE	.XXX	±
FOUR PLACE	.XXXX	±
ANGLES		±

THIRD ANGLE PROJECTION



DRAWN

SPK

26NOV07

CHECK

RJ

26NOV07

THIS DRAWING COVERS A PROPRIETARY ITEM
AND IS THE PROPERTY OF HONEYWELL.
THIS DRAWING IS NOT TO BE COPIED OR USED
WITHOUT THE PERMISSION OF HONEYWELL.

INTERPRET PER ANSI Y14.5M-1982
OTHER HONEYWELL ENGINEERING
STANDARDS MAY APPLY

RASTER

Honeywell

TITLE

SWITCH - BASIC

SIZE

B

TYPE

I

DRAWING NAME

1SX1-T2

REV

8

SCALE

-

WEIGHT:.003 LB MAX

SHEET 1 OF 1