

Thyristor Module

$$V_{RRM} = 2 \times 1600 \text{ V}$$


$$I_{TAV} = 21 \text{ A}$$

$$V_T = 1.52 \text{ V}$$

Phase leg


Part number

MCC21-16io8B

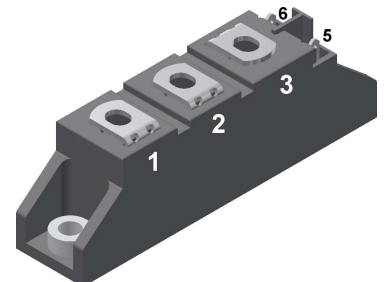

Backside: isolated

 E72873

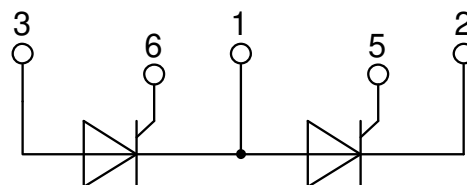

Features / Advantages:

- Thyristor for line frequency
- Planar passivated chip
- Long-term stability
- Direct Copper Bonded Al₂O₃-ceramic

Applications:

- Line rectifying 50/60 Hz
- Softstart AC motor control
- DC Motor control
- Power converter
- AC power control
- Lighting and temperature control

Package: TO-240AA

- Isolation Voltage: 4800 V~
- Industry standard outline
- RoHS compliant
- Soldering pins for PCB mounting
- Base plate: DCB ceramic
- Reduced weight
- Advanced power cycling

Disclaimer Notice

Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.



Thyristor				Ratings			
Symbol	Definition	Conditions		min.	typ.	max.	Unit
$V_{RSM/DSM}$	max. non-repetitive reverse/forward blocking voltage	$T_{VJ} = 25^{\circ}\text{C}$				1700	V
$V_{RRM/DRM}$	max. repetitive reverse/forward blocking voltage	$T_{VJ} = 25^{\circ}\text{C}$				1600	V
$I_{R/D}$	reverse current, drain current	$V_{R/D} = 1600\text{ V}$	$T_{VJ} = 25^{\circ}\text{C}$			100	μA
		$V_{R/D} = 1600\text{ V}$	$T_{VJ} = 125^{\circ}\text{C}$			5	mA
V_T	forward voltage drop	$I_T = 45\text{ A}$	$T_{VJ} = 25^{\circ}\text{C}$			1.45	V
		$I_T = 90\text{ A}$				1.89	V
		$I_T = 45\text{ A}$	$T_{VJ} = 125^{\circ}\text{C}$			1.52	V
		$I_T = 90\text{ A}$				2.20	V
I_{TAV}	average forward current	$T_C = 85^{\circ}\text{C}$	$T_{VJ} = 125^{\circ}\text{C}$			21	A
$I_{T(RMS)}$	RMS forward current	180° sine				33	A
V_{T0}	threshold voltage	} for power loss calculation only	$T_{VJ} = 125^{\circ}\text{C}$			0.85	V
r_T	slope resistance					15	m Ω
R_{thJC}	thermal resistance junction to case					1.1	K/W
R_{thCH}	thermal resistance case to heatsink				0.2		K/W
P_{tot}	total power dissipation		$T_C = 25^{\circ}\text{C}$			90	W
I_{TSM}	max. forward surge current	$t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$	$T_{VJ} = 45^{\circ}\text{C}$			320	A
		$t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$	$V_R = 0\text{ V}$			345	A
		$t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$	$T_{VJ} = 125^{\circ}\text{C}$			270	A
		$t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$	$V_R = 0\text{ V}$			295	A
I^2t	value for fusing	$t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$	$T_{VJ} = 45^{\circ}\text{C}$			510	A ² s
		$t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$	$V_R = 0\text{ V}$			495	A ² s
		$t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$	$T_{VJ} = 125^{\circ}\text{C}$			365	A ² s
		$t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$	$V_R = 0\text{ V}$			360	A ² s
C_J	junction capacitance	$V_R = 400\text{ V}$ $f = 1\text{ MHz}$	$T_{VJ} = 25^{\circ}\text{C}$		22		pF
P_{GM}	max. gate power dissipation	$t_p = 30\text{ }\mu\text{s}$	$T_C = 125^{\circ}\text{C}$			10	W
		$t_p = 300\text{ }\mu\text{s}$				5	W
P_{GAV}	average gate power dissipation					0.5	W
$(di/dt)_{cr}$	critical rate of rise of current	$T_{VJ} = 125^{\circ}\text{C}; f = 50\text{ Hz}$ repetitive, $I_T = 45\text{ A}$				150	A/ μs
		$t_p = 200\text{ }\mu\text{s}; di_G/dt = 0.45\text{ A}/\mu\text{s};$ $I_G = 0.45\text{ A}; V = \frac{2}{3} V_{DRM}$ non-repet., $I_T = 21\text{ A}$				500	A/ μs
$(dv/dt)_{cr}$	critical rate of rise of voltage	$V = \frac{2}{3} V_{DRM}$	$T_{VJ} = 125^{\circ}\text{C}$			1000	V/ μs
		$R_{GK} = \infty$; method 1 (linear voltage rise)					
V_{GT}	gate trigger voltage	$V_D = 6\text{ V}$	$T_{VJ} = 25^{\circ}\text{C}$			1	V
			$T_{VJ} = -40^{\circ}\text{C}$			1.2	V
I_{GT}	gate trigger current	$V_D = 6\text{ V}$	$T_{VJ} = 25^{\circ}\text{C}$			65	mA
			$T_{VJ} = -40^{\circ}\text{C}$			80	mA
V_{GD}	gate non-trigger voltage	$V_D = \frac{2}{3} V_{DRM}$	$T_{VJ} = 125^{\circ}\text{C}$			0.2	V
I_{GD}	gate non-trigger current					5	mA
I_L	latching current	$t_p = 10\text{ }\mu\text{s}$	$T_{VJ} = 25^{\circ}\text{C}$			150	mA
		$I_G = 0.3\text{ A}; di_G/dt = 0.3\text{ A}/\mu\text{s}$					
I_H	holding current	$V_D = 6\text{ V}$ $R_{GK} = \infty$	$T_{VJ} = 25^{\circ}\text{C}$			100	mA
t_{gd}	gate controlled delay time	$V_D = \frac{1}{2} V_{DRM}$	$T_{VJ} = 25^{\circ}\text{C}$			2	μs
		$I_G = 0.3\text{ A}; di_G/dt = 0.3\text{ A}/\mu\text{s}$					
t_q	turn-off time	$V_R = 100\text{ V}; I_T = 15\text{ A}; V = \frac{2}{3} V_{DRM}$ $T_{VJ} = 100^{\circ}\text{C}$ $di/dt = 10\text{ A}/\mu\text{s}$ $dv/dt = 20\text{ V}/\mu\text{s}$ $t_p = 300\text{ }\mu\text{s}$			150		μs

Package TO-240AA				Ratings			
Symbol	Definition	Conditions		min.	typ.	max.	Unit
I_{RMS}	RMS current	per terminal				200	A
T_{VJ}	virtual junction temperature			-40		125	°C
T_{op}	operation temperature			-40		100	°C
T_{stg}	storage temperature			-40		125	°C
Weight					81		g
M_D	mounting torque			2.5		4	Nm
M_T	terminal torque			2.5		4	Nm
$d_{Spp/App}$	creepage distance on surface striking distance through air	terminal to terminal	13.0	9.7			mm
$d_{Spb/Apb}$		terminal to backside	16.0	16.0			mm
V_{ISOL}	isolation voltage	t = 1 second	50/60 Hz, RMS; $I_{ISOL} \leq 1$ mA	4800			V
		t = 1 minute		4000			V



Ordering	Ordering Number	Marking on Product	Delivery Mode	Quantity	Code No.
Standard	MCC21-16io8B	MCC21-16io8B	Box	36	477338

Similar Part	Package	Voltage class
MCMA25P1600TA	TO-240AA-1B	1600
MCMA35P1600TA	TO-240AA-1B	1600

Equivalent Circuits for Simulation

* on die level


$T_{VJ} = 125^{\circ}\text{C}$

		Thyristor	
$V_{0\max}$	threshold voltage	0.85	V
$R_{0\max}$	slope resistance *	13.8	mΩ

Technical drawing of a 5-pin DIN connector. The drawing shows the front and side views with the following dimensions and labels:

- Overall length: 92 ± 0.5
- Distance from front face to center of pin 1: 80 ± 0.3
- Pin 1 thread: M5
- Pin 1 diameter: 5.5 ± 0.1
- Pin 1 height: 14.8
- Pin 1 center-to-center distance: 10 ± 0.1
- Pin 2 height: 6.9 ± 0.1
- Pin 3 height: 6.9 ± 0.1
- Pin 4 height: 6.9 ± 0.1
- Pin 5 height: 6.9 ± 0.1
- Pin 6 height: 6.9 ± 0.1
- Pin 7 height: 6.9 ± 0.1
- Pin 8 height: 6.9 ± 0.1
- Pin 9 height: 6.9 ± 0.1
- Pin 10 height: 6.9 ± 0.1
- Pin 11 height: 6.9 ± 0.1
- Pin 12 height: 6.9 ± 0.1
- Pin 13 height: 6.9 ± 0.1
- Pin 14 height: 6.9 ± 0.1
- Pin 15 height: 6.9 ± 0.1
- Pin 16 height: 6.9 ± 0.1
- Pin 17 height: 6.9 ± 0.1
- Pin 18 height: 6.9 ± 0.1
- Pin 19 height: 6.9 ± 0.1
- Pin 20 height: 6.9 ± 0.1
- Pin 21 height: 6.9 ± 0.1
- Pin 22 height: 6.9 ± 0.1
- Pin 23 height: 6.9 ± 0.1
- Pin 24 height: 6.9 ± 0.1
- Pin 25 height: 6.9 ± 0.1
- Pin 26 height: 6.9 ± 0.1
- Pin 27 height: 6.9 ± 0.1
- Pin 28 height: 6.9 ± 0.1
- Pin 29 height: 6.9 ± 0.1
- Pin 30 height: 6.9 ± 0.1
- Pin 31 height: 6.9 ± 0.1
- Pin 32 height: 6.9 ± 0.1
- Pin 33 height: 6.9 ± 0.1
- Pin 34 height: 6.9 ± 0.1
- Pin 35 height: 6.9 ± 0.1
- Pin 36 height: 6.9 ± 0.1
- Pin 37 height: 6.9 ± 0.1
- Pin 38 height: 6.9 ± 0.1
- Pin 39 height: 6.9 ± 0.1
- Pin 40 height: 6.9 ± 0.1
- Pin 41 height: 6.9 ± 0.1
- Pin 42 height: 6.9 ± 0.1
- Pin 43 height: 6.9 ± 0.1
- Pin 44 height: 6.9 ± 0.1
- Pin 45 height: 6.9 ± 0.1
- Pin 46 height: 6.9 ± 0.1
- Pin 47 height: 6.9 ± 0.1
- Pin 48 height: 6.9 ± 0.1
- Pin 49 height: 6.9 ± 0.1
- Pin 50 height: 6.9 ± 0.1
- Pin 51 height: 6.9 ± 0.1
- Pin 52 height: 6.9 ± 0.1
- Pin 53 height: 6.9 ± 0.1
- Pin 54 height: 6.9 ± 0.1
- Pin 55 height: 6.9 ± 0.1
- Pin 56 height: 6.9 ± 0.1
- Pin 57 height: 6.9 ± 0.1
- Pin 58 height: 6.9 ± 0.1
- Pin 59 height: 6.9 ± 0.1
- Pin 60 height: 6.9 ± 0.1
- Pin 61 height: 6.9 ± 0.1
- Pin 62 height: 6.9 ± 0.1
- Pin 63 height: 6.9 ± 0.1
- Pin 64 height: 6.9 ± 0.1
- Pin 65 height: 6.9 ± 0.1
- Pin 66 height: 6.9 ± 0.1
- Pin 67 height: 6.9 ± 0.1
- Pin 68 height: 6.9 ± 0.1
- Pin 69 height: 6.9 ± 0.1
- Pin 70 height: 6.9 ± 0.1
- Pin 71 height: 6.9 ± 0.1
- Pin 72 height: 6.9 ± 0.1
- Pin 73 height: 6.9 ± 0.1
- Pin 74 height: 6.9 ± 0.1
- Pin 75 height: 6.9 ± 0.1
- Pin 76 height: 6.9 ± 0.1
- Pin 77 height: 6.9 ± 0.1
- Pin 78 height: 6.9 ± 0.1
- Pin 79 height: 6.9 ± 0.1
- Pin 80 height: 6.9 ± 0.1
- Pin 81 height: 6.9 ± 0.1
- Pin 82 height: 6.9 ± 0.1
- Pin 83 height: 6.9 ± 0.1
- Pin 84 height: 6.9 ± 0.1
- Pin 85 height: 6.9 ± 0.1
- Pin 86 height: 6.9 ± 0.1
- Pin 87 height: 6.9 ± 0.1
- Pin 88 height: 6.9 ± 0.1
- Pin 89 height: 6.9 ± 0.1
- Pin 90 height: 6.9 ± 0.1
- Pin 91 height: 6.9 ± 0.1
- Pin 92 height: 6.9 ± 0.1
- Pin 93 height: 6.9 ± 0.1
- Pin 94 height: 6.9 ± 0.1
- Pin 95 height: 6.9 ± 0.1
- Pin 96 height: 6.9 ± 0.1
- Pin 97 height: 6.9 ± 0.1
- Pin 98 height: 6.9 ± 0.1
- Pin 99 height: 6.9 ± 0.1
- Pin 100 height: 6.9 ± 0.1
- Pin 101 height: 6.9 ± 0.1
- Pin 102 height: 6.9 ± 0.1
- Pin 103 height: 6.9 ± 0.1
- Pin 104 height: 6.9 ± 0.1
- Pin 105 height: 6.9 ± 0.1
- Pin 106 height: 6.9 ± 0.1
- Pin 107 height: 6.9 ± 0.1
- Pin 108 height: 6.9 ± 0.1
- Pin 109 height: 6.9 ± 0.1
- Pin 110 height: 6.9 ± 0.1
- Pin 111 height: 6.9 ± 0.1
- Pin 112 height: 6.9 ± 0.1
- Pin 113 height: 6.9 ± 0.1
- Pin 114 height: 6.9 ± 0.1
- Pin 115 height: 6.9 ± 0.1
- Pin 116 height: 6.9 ± 0.1
- Pin 117 height: 6.9 ± 0.1
- Pin 118 height: 6.9 ± 0.1
- Pin 119 height: 6.9 ± 0.1
- Pin 120 height: 6.9 ± 0.1
- Pin 121 height: 6.9 ± 0.1
- Pin 122 height: 6.9 ± 0.1
- Pin 123 height: 6.9 ± 0.1
- Pin 124 height: 6.9 ± 0.1
- Pin 125 height: 6.9 ± 0.1
- Pin 126 height: 6.9 ± 0.1
- Pin 127 height: 6.9 ± 0.1
- Pin 128 height: 6.9 ± 0.1
- Pin 129 height: 6.9 ± 0.1
- Pin 130 height: 6.9 ± 0.1
- Pin 131 height: 6.9 ± 0.1
- Pin 132 height: 6.9 ± 0.1
- Pin 133 height: 6.9 ± 0.1
- Pin 134 height: 6.9 ± 0.1
- Pin 135 height: 6.9 ± 0.1
- Pin 136 height: 6.9 ± 0.1
- Pin 137 height: 6.9 ± 0.1
- Pin 138 height: 6.9 ± 0.1
- Pin 139 height: 6.9 ± 0.1
- Pin 140 height: 6.9 ± 0.1
- Pin 141 height: 6.9 ± 0.1
- Pin 142 height: 6.9 ± 0.1
- Pin 143 height: 6.9 ± 0.1
- Pin 144 height: 6.9 ± 0.1
- Pin 145 height: 6.9 ± 0.1
- Pin 146 height: 6.9 ± 0.1
- Pin 147 height: 6.9 ± 0.1
- Pin 148 height: 6.9 ± 0.1
- Pin 149 height: 6.9 ± 0.1
- Pin 150 height: $6.9 \pm$

Type ZY 200R (R = Right for pin pair 6/7) } UL 758, style 3751

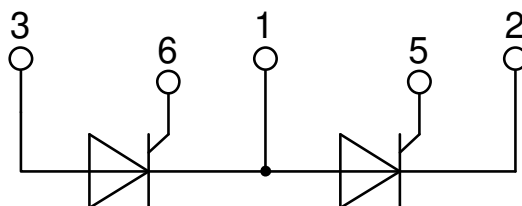



Thyristor

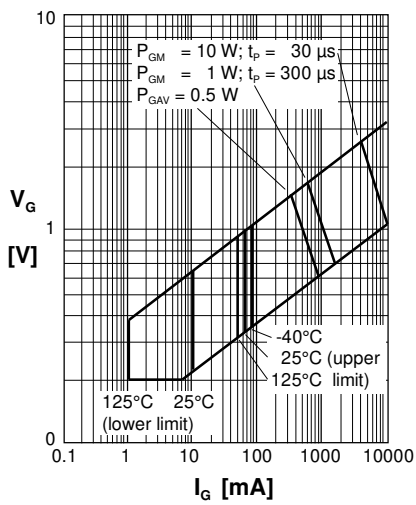


Fig. 1 Gate trigger characteristics

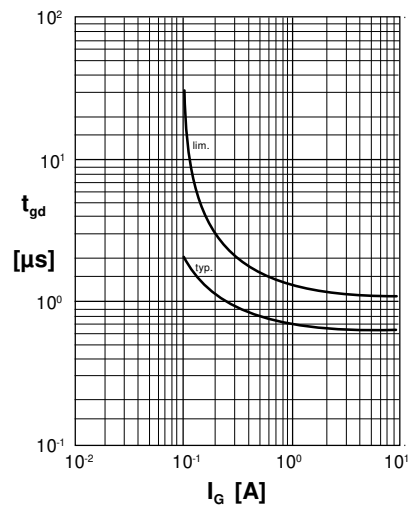


Fig. 2 Gate trigger delay time