



Smart Storage Solutions Overview

Smart Storage Performance, Power, Security and Reliability

With the massive growth of data centers, performance, power and reliability are more important considerations than ever.

Performance requirements are driven by both the increased adoption of Flash-based SSDs and the increasing sizes of HDD arrays. Data centers are looking to take advantage of the performance that these Flash-based drives promise and require storage solutions that can deliver manageability and data availability without compromising performance.

Power is a significant component of a data center's operating expenses. Optimizing power for cold storage tiers in the data center, for example, delivers substantial benefits to the bottom line.

Data security has become one of the highest priorities for data centers and cloud computing environments as enterprises seek to safeguard customer information, classified company documentation and communications, financial records, employee payroll records and other confidential data.

As more mission-critical data finds its way to data centers, end customers insist on reduced downtime, improved response times to issues and a more positive end-user experience overall.

The Adaptec® SmartRAID 3100, SmartHBA 2100 and HBA 1100 product families are based on the company's latest 28 nm SmartROC 3100 and SmartIOC 2100 storage controller Integrated Circuits (ICs). The SmartRAID 3162-8i /e adapter includes maxCrypto™, the industry's only data-at-rest controller-based encryption solution, that provides a superior solution over self-encrypting drives.

Microchip's unified Smart Storage stack powers the entire family of products, leveraging core IP that has shipped in over 30 million servers, delivering one of the industry's most reliable and highest-performing storage controller software platforms.

www.microchip.com

Technology Leadership With Data Encryption

Solutions for data-at-rest encryption are now a security requirement in many market segments such as health care, finance, e-commerce, federal government branches and insurance—a significant overall percentage of the deployed storage.

Data center managers face the challenge of safeguarding data while still meeting continually-increasing performance demands for large-scale applications, such as web serving, file serving, databases, Online Transaction Processing (OLTP), machine learning and High-Performance Computing (HPC).

Now available, the SmartRAID 3162-8i/e with maxCrypto, delivers data protection with little to no impact on latency or I/O performance. The 3162-8i/e offers superior advantages over Self-Encrypting Drives (SEDs) and integrates seamlessly into existing storage infrastructures, allowing data centers to deploy a uniform, scalable encryption strategy across the enterprise.

Controller-Based Encryption

Value Proposition Versus Self-Encrypting Drives



Superior Security vs. SED

- ✔ Prevents data snooping between controller and drives
- ✔ Re-key support for wrapping keys or data volume keys
- ✔ Encrypted controller cache

Superior Flexibility vs. SED

- ✔ Allows in-place encryption of existing data (volume remains available)
- ✔ No separate "special" (SED) drives for end-customers to manage
- ✔ 64 Logical Drive support for flexible mapping to OS Users and Applications

Support

Microchip is committed to supporting its customers in developing products faster and more efficiently. We maintain a worldwide network of field applications engineers and technical support ready to provide product and system assistance. For more information, please visit www.microchip.com:

- Technical Support: www.microchip.com/support
- Evaluation samples of any Microchip device: www.microchip.com/sample
- Knowledge base and peer help: www.microchip.com/forums
- Sales and Global Distribution: www.microchip.com/sales

Training

If additional training interests you, Microchip offers several resources including in-depth technical training and reference material, self-paced tutorials and significant online resources.

- Overview of Technical Training Resources: www.microchip.com/training
- MASTERS Conferences: www.microchip.com/masters
- Developer Help Website: www.microchip.com/developerhelp
- Technical Training Centers: www.microchip.com/seminars



Microchip Technology Inc. | 2355 W. Chandler Blvd. | Chandler AZ, 85224-6199

www.microchip.com

The Microchip name and logo, the Microchip logo, Adaptec and maxCrypto is a trademark are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries. All other trademarks mentioned herein are property of their respective companies.
© 2020, Microchip Technology Incorporated. All Rights Reserved. 1/20

Data Center Solutions



MICROCHIP

Adaptec® Product Guide

Trusted Storage Solutions



www.microchip.com

Smart Storage Solutions Overview

Each New Product Family Has Unique, Differentiating Features

SmartRAID 3100

The SmartRAID 3100 is optimized for Enterprise storage applications that require the highest level of data availability and data center applications that benefit from caching.

- Adapters with up to 24 ports using 28 nm SAS/SATA-optimized silicon, offering the industry's lowest power
- Zero Maintenance Cache Protection (ZMCP) with a cache size up to 4 GB with integrated cache backup circuitry for optimal cost, thermal performance and operating efficiency
- Board options without cache backup
- Mixed mode enables drives to be independently configured as raw drives or as part of a logical volume
- maxCache 4.0 included on 315x and 316x adapters
- maxCrypto controller-based encryption on the 3162-8i/e adapter

SmartHBA 2100

The SmartHBA 2100 is optimized for Software-Defined Storage (SDS) applications that require hardware RAID for OS boot drives as well as entry-level RAID for SMBs.



- The only basic hardware RAID solution offering a fully featured, high-performance Host Bus Adapter (HBA) for drives configured as raw drives, required for multi-path IO and SDS applications
- RAID levels 0, 1, 10, 5
- Industry's only basic hardware RAID solution with more than 8 ports
- Mixed mode enables drives to be independently configured as raw drives or as part of a logical volume

HBA 1100

The HBA 1100 is optimized for SDS, cold storage, and raw high-performance connectivity.

- Adapters with up to 24 ports using 28 nm SAS/SATA-optimized silicon, offering the industry's lowest power
- Support for host-managed and host-aware Shingled Magnetic Recording (SMR) drives
- Broad OS driver support, including inbox driver support
- Performance of up to 1.7M IOPS

www.microchip.com

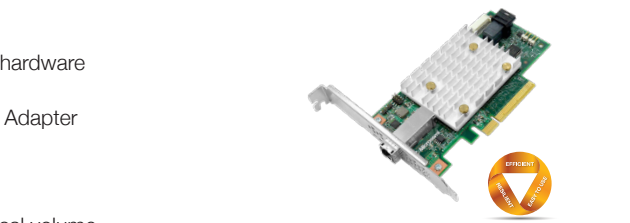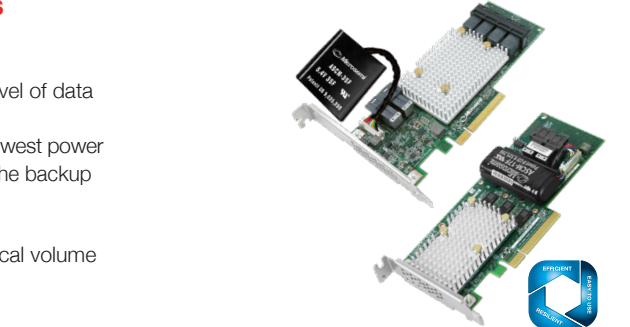

Adaptec® Product Guide



SmartRAID

SmartRAID 3100 RAID Adapters

Adaptec 12 Gbps SmartRAID 3100 adapters have an 8-lane PCIe® Gen 3 host bus interface, a SmartROC 3100 processor, an MD2 low-profile form factor, and can be scaled to a maximum of 256 SAS/SATA devices*. The newest addition, the SmartRAID 3162-8i/e, provides the industry's only data-at-rest controller-based encryption solution, maxCrypto. Supporting operating systems include include Microsoft Windows®, Red Hat, SUSE, Fedora, Debian, Ubuntu, Sun Solaris, FreeBSD, VMware ESXi, open-source Linux® drivers and inbox drivers.

Product	Part Number	RAID Levels	SAS/SATA Ports	Connectors	Cache	SSD Cache	Cache Protection
SmartRAID 3162-8i	2299800-R	Hardware RAID 0, 1, 5, 6, 10, 50, 60, 1 ADM and 10 ADM	8 internal	2 (x4) SFF-8643	2 GB DDR4/2100 MHz	maxCache 4.0	Embedded Flash backup On board ASCM-17F supercap
SmartRAID 3162-8i /e	2299600-R		8 internal	2 (x4) SFF-8643	2 GB DDR4/2100 MHz	maxCache 4.0	Embedded Flash backup On board ASCM-17F supercap
SmartRAID 3154-24i	2294700-R		24 internal	6 (x4) SFF-8643	4 GB DDR4/2100 MHz	maxCache 4.0	Embedded Flash backup Tethered ASCM-35F supercap
SmartRAID 3154-8i16e	2294600-R		8 internal/ 16 external	2 (x4) SFF-8643 4 (x4) SFF-8644	4 GB DDR4/2100 MHz	maxCache 4.0	Embedded Flash backup Tethered ASCM-35F supercap
SmartRAID 3154-16i	2295000-R		16 internal	4 (x4) SFF-8643	4 GB DDR4/2100 MHz	maxCache 4.0	Embedded Flash backup Tethered ASCM-35F supercap
SmartRAID 3154-8i8e	2295100-R		8 internal/ 8 external	2 (x4) SFF-8643 2 (x4) SFF-8644	4 GB DDR4/2100 MHz	maxCache 4.0	Embedded Flash backup Tethered ASCM-35F supercap
SmartRAID 3154-8e	2290800-R		8 external	2 (x4) SFF-8644	4 GB DDR4/2100 MHz	maxCache 4.0	Embedded Flash backup Tethered ASCM-35F supercap
SmartRAID 3154-8i	2291000-R		8 internal	2 (x4) SFF-8643	4 GB DDR4/2100 MHz	maxCache 4.0	Embedded Flash backup Tethered ASCM-35F supercap
SmartRAID 3152-8i	2290200-R		8 internal	2 (x4) SFF-8643	2 GB DDR4/2100 MHz	maxCache 4.0	Embedded Flash backup Tethered ASCM-35F supercap
SmartRAID 3102-8i	2294800-R		8 internal	2 (x4) SFF-8643	2 GB DDR4/2100 MHz	NA	NA
SmartRAID 3151-4i	2294900-R		4 internal	1 (x4) SFF-8643	1 GB DDR4/2100 MHz	maxCache 4.0	Embedded Flash backup Tethered ASCM-35F supercap
SmartRAID 3101-4i	2291700-R		4 internal	1 (x4) SFF-8643	1 GB DDR4/2100 MHz	NA	NA
SmartRAID 3102E-8i	2304200-R	0, 1, 1 ADM, 10, 10 ADM	8 internal	2 (x4) SFF-8643	2 GB DDR4/2100 MHz	NA	NA
SmartRAID 3101E-4i	2304400-R	0, 1, 1 ADM, 10, 10 ADM	4 internal	1 (x4) SFF-8643	1 GB DDR4/2100 MHz	NA	NA
*238 SSD/HDD maximum. Remaining device count is reserved for expanders and enclosure management.							

SmartRAID

SmartHBA and Host Bus Adapters (HBA)

Adaptec 12 Gbps HBAs have an 8-lane PCIe Gen 3 host bus interface, a SmartIOOC 2100 processor, an MD2 low-profile form factor, and can be scaled to a maximum of 256 SAS/SATA devices*. In addition, the SmartHBA 2100 series uniquely combines the capabilities of a full-featured HBA, with those of a basic hardware RAID adapter. Supporting operating systems include Microsoft Windows, Red Hat, SuSE, CentOS, Ubuntu, VMware ESXi, FreeBSD, Solaris and Citrix Xen Server.

SmartHBA 2100 Host Bus Adaptor Specifications

	Part Number	Dimensions	SAS/SATA Ports	Connectors	RAID Levels	Caching
	2301600-R	2.535" H x 6.6" L (64 mm x 167 mm)	24 internal	6 (x4) SFF-8643	Hardware RAID 0, 1, 10, 5	NA
	2302100-R	2.535" H x 6.6" L (64 mm x 167 mm)	16 internal	4 (x4) SFF-8643		
	2301900-R	2.535" H x 6.6" L (64 mm x 167 mm)	8 internal/8 external	2 (x4) SFF-8643/2 (x4) SFF-8644		
	2290400-R	2.535" H x 6.6" L (64 mm x 167 mm)	8 internal	2 (x4) SFF-8643		
	2292200-R	2.535" H x 5.2" L (64 mm x 132.08 mm)	4 internal/4 external	1 (x4) SFF-8643/1 (x4) SFF-8644		
um. Remaining device count is reserved for expanders and enclosure management.						
st Bus Adapters						
	Part Number	Dimensions	SAS/SATA Ports	Connectors		
	2293800-R	2.535" H x 6.6" L (64 mm x 167 mm)	24 internal	6 (x4) SFF-8643		
	2293500-R	2.535" H x 6.6" L (64 mm x 167 mm)	16 internal	4 (x4) SFF-8643		
	2293600-R	2.535" H x 6.6" L (64 mm x 167 mm)	16 external	4 (x4) SFF-8644		
	2293700-R	2.535" H x 6.6" L (64 mm x 167 mm)	8 internal/8 external	2 (x4) SFF-8643/2 (x4) SFF-8644		
	2293200-R	2.535" H x 6.6" L (64 mm x 167 mm)	8 internal	2 (x4) SFF-8643		
	2293300-R	2.535" H x 6.6" L (64 mm x 167 mm)	8 external	2 (x4) SFF-8644		
	2293400-R	2.535" H x 5.2" L (64 mm x 132.08 mm)	4 internal	1 (x4) SFF-8643		
um. Remaining device count is reserved for expanders and enclosure management.						

SmartHBA

Series 8 RAID Adapters

Adaptec 12 Gbps RAID Adapters have an 8-lane PCIe Gen3 host bus interface,a 12 Gbps RoC processor, a MD2 low-profile form factor, and can be scaled to a maximum of 256 SAS/SATA devices*. Supporting operating systems include Microsoft Windows, Red Hat Linux, SUSE Linux, Fedora, Debian Linux, Ubuntu Linux, Sun Solaris, FreeBSD and VMware ESXi.

Product	Part Number	RAID Levels	SAS/SATA Ports	Connectors	Cache	SSD Cache	Cache Protection
RAID 81605ZQ	2281600-R	Hardware RAID 0, 1, 1E, 5, 6, 10, 50, 60 Hybrid RAID 1, 10	16 internal	4 internal SFF-8643	1024 MB	maxCache 3.0	Flash backup embedded AFM-700 Supercap (included)
RAID 8885Q	2277100-R		8 internal 8 external	2 internal SFF-8643/ 2 external SFF-8644	1024 MB	maxCache 3.0	AFM-700 (included)
RAID 81605Z	2287101-R		16 internal	4 internal SFF-8643	1024 MB	NA	Flash backup embedded AFM-700 Supercap (included)
RAID 8885	2277000-R		8 internal 8 external	2 internal SFF-8643/ 2 external SFF-8644	1024 MB	NA	AFM-700 (optional) 2275400-R
RAID 8805	2277500-R		8 internal	2 internal SFF-8643	1024 MB	NA	AFM-700 (optional) 2275400-R
RAID 8405	2277600-R		4 internal	1 internal SFF-8643	1024 MB	NA	AFM-700 (optional) 2275400-R
RAID 8805E	2294001-R	Hardware RAID 0, 1, 10	8 internal	2 internal SFF-8643	512 MB	NA	NA
RAID 8405E	2293901-R	Hybrid RAID 1, 10	4 internal	1 internal SFF-8643	512 MB	NA	NA
*238 SSD/HDD maximum. Remaining device count is reserved for expanders and enclosure management.							

SAS Expander Card

Product	Part Number	Ports	Connector	Form Factor	Dimensions	PCIe® Slot Power	Auxiliary Power Connector
82885T	Single: 2283400-R	28 internal/ 8 external	7 × SFF-8643, 2 × SFF-8644	MD2—low profile	2.535" H × 6.6" L (64 mm × 167 mm)	Through PCIe ×4 interface	Yes

SAS Expander Card

SmartHBA

Internal Cables

Internal	Supported Products		12 Gbps Internal		6 Gbps Internal				
	SmartRAID 3162 -8i	HBA 1100-24i	Connector to End Device						
	SmartRAID 3162-8i	HBA 1100-16i	SFF-8643		SFF-8087	SFF-8482	SATA	SATA right angle	
	SmartRAID 3162-8i	HBA 1100-8i							
	SmartRAID 3154-8i16e	HBA 1100-4i	Connector to Adapter						
	SmartRAID 3154-8i8e	ASR-81605ZQ	SFF-8643 right angle		ACK-I-rA-HDmSAS-HDmSAS	ACK-I-rA-HDmSAS-mSAS SAS	ACK-I-rA-HDmSAS-4SAS-SB	ACK-I-rA-HDmSAS-4SATA-SB	ACK-I-rA-HDmSAS-4rASATA-SB
	SmartRAID 3154-24i	ASR-8405							
	SmartRAID 3154-8i	ASR-8405E	Part # 1 meter: 2282800-R Part # .8 meter: 2280200-R						
	SmartRAID 3152-8i	ASR-8805E	Part # .5 meter: 2282500-R Part # .5 meter: 2281300-R Part # .8 meter: 2279600-R Part # .8 meter: 2280000-R Part # .8 meter: 2279900-R						
	SmartRAID 3102-8i	ASR-8885	ACK-I-HDmSAS-4SAS-SB ACK-I-HDmSAS-4SATA-SB						
SmartRAID 3151-4i	ASR-8805	Part # 1 meter: 2282100-R Part # 1 meter: 2279700-R							
SmartRAID 3101-4i		Part # .5 meter: 2282200-R Part # .5 meter: 2281200-R Part # .8 meter: 2280100-R Part # .8 meter: 2279800-R							
SmartHBA 2100-8i8e									
SmartHBA 2100-4i4e									
SmartHBA 2100-24i									
SmartHBA 2100-16i									
SmartHBA 2100-8i									

External Cables

External	Supported Products	12 Gbps Internal		6 Gbps Internal	
	HBA 1100-16e HBA 1100-8i8e HBA 1100-8e ASR-8885Q ASR-8885 ASR-78165 ASR-71685	Connector to End Device		Connector to Adapter	
		SFF-8644 External		SFF-8088 External	
					
		SFF-8644		ACK-E-HDmSAS-HDmSAS	
					

Make the Right Connection With Adaptec 12 Gbps and 6 Gbps SAS HD Cables

Adaptec SmartRAID 3100, SmartHBA 2100, HBA 1100 and Series 8/8Q/8E RAID adapters are configured with mini-SAS HD connectors to allow for maximum performance and connectivity in a MD2 low-profile form factor. Pick the right cable for your internal or external storage solution.