



MCP3421/2/5 SOT-23-6

Evaluation Board

User's Guide

Note the following details of the code protection feature on Microchip products:

- Microchip products meet the specifications contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is secure when used in the intended manner, within operating specifications, and under normal conditions.
- Microchip values and aggressively protects its intellectual property rights. Attempts to breach the code protection features of Microchip product is strictly prohibited and may violate the Digital Millennium Copyright Act.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of its code. Code protection does not mean that we are guaranteeing the product is "unbreakable" Code protection is constantly evolving. Microchip is committed to continuously improving the code protection features of our products.

This publication and the information herein may be used only with Microchip products, including to design, test, and integrate Microchip products with your application. Use of this information in any other manner violates these terms. Information regarding device applications is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. Contact your local Microchip sales office for additional support or, obtain additional support at <https://www.microchip.com/en-us/support/design-help/client-support-services>.

THIS INFORMATION IS PROVIDED BY MICROCHIP "AS IS". MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY, AND FITNESS FOR A PARTICULAR PURPOSE, OR WARRANTIES RELATED TO ITS CONDITION, QUALITY, OR PERFORMANCE.

IN NO EVENT WILL MICROCHIP BE LIABLE FOR ANY INDIRECT, SPECIAL, PUNITIVE, INCIDENTAL, OR CONSEQUENTIAL LOSS, DAMAGE, COST, OR EXPENSE OF ANY KIND WHATSOEVER RELATED TO THE INFORMATION OR ITS USE, HOWEVER CAUSED, EVEN IF MICROCHIP HAS BEEN ADVISED OF THE POSSIBILITY OR THE DAMAGES ARE FORESEEABLE. TO THE FULLEST EXTENT ALLOWED BY LAW, MICROCHIP'S TOTAL LIABILITY ON ALL CLAIMS IN ANY WAY RELATED TO THE INFORMATION OR ITS USE WILL NOT EXCEED THE AMOUNT OF FEES, IF ANY, THAT YOU HAVE PAID DIRECTLY TO MICROCHIP FOR THE INFORMATION.

Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights unless otherwise stated.

Trademarks

The Microchip name and logo, the Microchip logo, Adaptec, AVR, AVR logo, AVR Freaks, BesTime, BitCloud, CryptoMemory, CryptoRF, dsPIC, flexPWR, HELDO, IGLOO, JukeBlox, KeeLoq, Klear, LANCheck, LinkMD, maXStylus, maXTouch, MediaLB, megaAVR, Microsemi, Microsemi logo, MOST, MOST logo, MPLAB, OptoLyzer, PIC, picoPower, PICSTART, PIC32 logo, PolarFire, Prochip Designer, QTouch, SAM-BA, SenGenuity, SpyNIC, SST, SST Logo, SuperFlash, Symmetricom, SyncServer, Tachyon, TimeSource, tinyAVR, UNI/O, Vectron, and XMEGA are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

AgileSwitch, ClockWorks, The Embedded Control Solutions Company, EtherSynch, Flashtec, Hyper Speed Control, HyperLight Load, Libero, motorBench, mTouch, Powermite 3, Precision Edge, ProASIC, ProASIC Plus, ProASIC Plus logo, Quiet-Wire, SmartFusion, SyncWorld, TimeCesium, TimeHub, TimePictra, TimeProvider, and ZL are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Adjacent Key Suppression, AKS, Analog-for-the-Digital Age, Any Capacitor, AnyIn, AnyOut, Augmented Switching, BlueSky, BodyCom, Clockstudio, CodeGuard, CryptoAuthentication, CryptoAutomotive, CryptoCompanion, CryptoController, dsPICDEM, dsPICDEM.net, Dynamic Average Matching, DAM, ECAN, Espresso T1S, EtherGREEN, EyeOpen, GridTime, IdealBridge, IGaT, In-Circuit Serial Programming, ICSP, INICnet, Intelligent Paralleling, IntelliMOS, Inter-Chip Connectivity, JitterBlocker, Knob-on-Display, MarginLink, maxCrypto, maxView, memBrain, Mindi, MiWi, MPASM, MPF, MPLAB Certified logo, MPLIB, MPLINK, mSiC, MultiTRAK, NetDetach, Omniscient Code Generation, PICDEM, PICDEM.net, PICKit, PICtail, Power MOS IV, Power MOS 7, PowerSmart, PureSilicon, QMatrix, REAL ICE, Ripple Blocker, RTAX, RTG4, SAM-ICE, Serial Quad I/O, simpleMAP, SimpliPHY, SmartBuffer, SmartHLS, SMART-I.S., storClad, SQL, SuperSwitcher, SuperSwitcher II, Switchtec, SynchroPHY, Total Endurance, Trusted Time, TSHARC, Turing, USBCheck, VariSense, VectorBlox, VeriPHY, ViewSpan, WiperLock, XpressConnect, and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

The Adaptec logo, Frequency on Demand, Silicon Storage Technology, and Symmcom are registered trademarks of Microchip Technology Inc. in other countries.

GestIC is a registered trademark of Microchip Technology Germany II GmbH & Co. KG, a subsidiary of Microchip Technology Inc., in other countries.

All other trademarks mentioned herein are property of their respective companies.

© 2023, Microchip Technology Incorporated and its subsidiaries.

All Rights Reserved.

ISBN: 978-1-6683-3259-7

For information regarding Microchip's Quality Management Systems, please visit www.microchip.com/quality.

Table of Contents

Chapter 1. Product Overview

1.1 Introduction	9
1.2 MCP3421/2/5 SOT-23-6 Evaluation Board Overview	9
1.2.1 I2C Address Bits	10

Chapter 2. PICkit™ Serial Analyzer

2.1 Getting Started with the PICkit™ Serial Analyzer	11
2.1.1 PICkit™ Serial Analyzer and MCP3421/2/5 SOT-23-6 Evaluation Board Hardware Set-Up	11
2.1.2 PICkit™ Serial Analyzer and MCP3421/2/5 SOT-23-6 Evaluation Board PC Software Set-up	13
2.2 Creating Script Files	16
2.2.1 Creating a Script File	16
2.2.2 Writing the Configuration Register	17
2.2.3 Saving and Executing the Script File	17
2.2.4 Reading Conversion Data	18

Chapter 3. MCP2221A Breakout Module

3.1 Getting Started with the MCP2221A Breakout Module	21
3.1.1 MCP2221A Breakout Module and MCP3421/2/5 SOT-23-6 Evaluation Board Hardware Set-Up	21
3.1.2 MCP2221A Breakout Module and MCP3421/2/5 SOT-23-6 Evaluation Board PC Software Set-Up	21
3.2 Creating Command List Files	22
3.2.1 Creating a Command List	22
3.2.2 Writing the Configuration Register	22
3.2.3 Saving and Executing the Command List	23
3.2.4 Reading Conversion Data	24

Appendix A. Schematic and Layouts

A.1 Introduction	25
A.2 MCP3421 Schematic	26
A.3 MCP3422 Schematic	27
A.4 MCP3425 Schematic	28

Appendix B. Bill of Materials (BOM)..... 29

MCP3421/2/5 SOT-23-6 Evaluation Board User's Guide

NOTES:

Preface

NOTICE TO CUSTOMERS

All documentation becomes dated, and this manual is no exception. Microchip tools and documentation are constantly evolving to meet customer needs, so some actual dialogs and/or tool descriptions may differ from those in this document. Please refer to our website (www.microchip.com) to obtain the latest documentation available.

Documents are identified with a “DS” number. This number is located on the bottom of each page, in front of the page number. The numbering convention for the DS number is “DSXXXXXXXXA”, where “XXXXXXXX” is the document number and “A” is the revision level of the document.

For the most up-to-date information on development tools, see the MPLAB® IDE online help. Select the Help menu, and then Topics, to open a list of available online help files.

INTRODUCTION

This chapter contains general information that will be useful to know before using the MCP3421/2/5 SOT-23-6 Evaluation Board. Items discussed in this chapter include:

- [Document Layout](#)
- [Conventions Used in this Guide](#)
- [Recommended Reading](#)
- [The Microchip Website](#)
- [Product Change Notification Service](#)
- [Customer Support](#)
- [Document Revision History](#)

DOCUMENT LAYOUT

This document describes how to use the MCP3421/2/5 SOT-23-6 Evaluation Board as a development tool to emulate and debug firmware on a target board. The manual layout is as follows:

- **Chapter 1. “Product Overview”** – Short overview of the MCP3421/2/5 SOT-23-6 Evaluation Board.
- **Chapter 2. “PICkit™ Serial Analyzer”** – Details about the PICkit™ Serial Analyzer and instructions on how to use it to obtain the ADC conversion results.
- **Chapter 3. “MCP2221A Breakout Module”** – Details about the MCP2221A Breakout Module.
- **Appendix A. “Schematic and Layouts”** – Shows the schematic and layout diagrams for the MCP3421/2/5 SOT-23-6 Evaluation Board.
- **Appendix B. “Bill of Materials (BOM)”** – Lists the parts used to build the MCP3421/2/5 SOT-23-6 Evaluation Board.

MCP3421/2/5 SOT-23-6 Evaluation Board User's Guide

CONVENTIONS USED IN THIS GUIDE

This manual uses the following documentation conventions:

DOCUMENTATION CONVENTIONS

Description	Represents	Examples
Arial font:		
Italic characters	Referenced books	<i>MPLAB® IDE User's Guide</i>
	Emphasized text	...is the <i>only</i> compiler...
Initial caps	A window	the Output window
	A dialog	the Settings dialog
	A menu selection	select Enable Programmer
Quotes	A field name in a window or dialog	"Save project before build"
Underlined, italic text with right angle bracket	A menu path	<u><i>File>Save</i></u>
Bold characters	A dialog button	Click OK
	A tab	Click the Power tab
N'Rnnnn	A number in verilog format, where N is the total number of digits, R is the radix and n is a digit.	4'b0010, 2'hF1
Text in angle brackets < >	A key on the keyboard	Press <Enter>, <F1>
Courier New font:		
Plain Courier New	Sample source code	#define START
	Filenames	autoexec.bat
	File paths	c:\mcc18\h
	Keywords	_asm, _endasm, static
	Command-line options	-Opa+, -Opa-
	Bit values	0, 1
	Constants	0xFF, 'A'
Italic Courier New	A variable argument	<i>file.o</i> , where <i>file</i> can be any valid filename
Square brackets []	Optional arguments	mcc18 [options] <i>file</i> [options]
Curly brackets and pipe character: { }	Choice of mutually exclusive arguments; an OR selection	errorlevel {0 1}
Ellipses...	Replaces repeated text	var_name [, var_name...]
	Represents code supplied by user	void main (void) { ... }

RECOMMENDED READING

This user's guide describes how to use the MCP3421/2/5 SOT-23-6 Evaluation Board. Other useful documents are listed below. The following Microchip documents are available and recommended as a supplemental reference resource:

- **MCP3421 Data Sheet – “18-Bit Analog-to-Digital Converter with I²C Interface and On-Board Reference” (DS22003)**
- **MCP3422/3/4 Data Sheet – “18-Bit, Multi-Channel $\Delta\Sigma$ Analog-to-Digital Converter with I²C Interface and On-Board Reference” (DS22088)**
- **MCP3425 Data Sheet – “16-Bit Analog-to-Digital Converter with I2C Interface and On-Board Reference” (DS22072).**

THE MICROCHIP WEBSITE

Microchip provides online support via our website at www.microchip.com. This website is used as a means to make files and information easily available to customers. Accessible by using your favorite Internet browser, the website contains the following information:

- **Product Support** – Data sheets and errata, application notes and sample programs, design resources, user's guides and hardware support documents, latest software releases and archived software
- **General Technical Support** – Frequently Asked Questions (FAQs), technical support requests, online discussion groups, Microchip consultant program member listing
- **Business of Microchip** – Product selector and ordering guides, latest Microchip press releases, listing of seminars and events, listings of Microchip sales offices, distributors and factory representatives.

PRODUCT CHANGE NOTIFICATION SERVICE

Microchip's customer notification service helps keep customers current on Microchip products. Subscribers will receive email notifications whenever there are changes, updates, revisions or errata related to a specified product family or development tool of interest.

To register, access the Microchip website at <https://www.microchip.com/en-us/support/product-change-notification> and follow the registration instructions.

CUSTOMER SUPPORT

Users of Microchip products can receive assistance through several channels:

- Distributor or Representative
- Local Sales Office
- Field Application Engineer (FAE)
- Technical Support

Customers should contact their distributor, representative or field application engineer (FAE) for support. Local sales offices are also available to help customers. A listing of sales offices and locations is included in the back of this document.

Technical support is available through the website at:
<https://www.microchip.com/support>.

MCP3421/2/5 SOT-23-6 Evaluation Board User's Guide

DOCUMENT REVISION HISTORY

Revision B (October 2023)

- Added MCP3425 device.

Revision A (January 2023)

- Initial release of this document.

Chapter 1. Product Overview

1.1 INTRODUCTION

The following chapter provides an overview of the MCP3421/2/5 SOT-23-6 Evaluation Board and demonstrates how to use it with either the PICKit™ Serial Analyzer (DV164122) or the MCP2221A Breakout Module (ADM00559).

1.2 MCP3421/2/5 SOT-23-6 EVALUATION BOARD OVERVIEW

The MCP3421 and MCP3422 Evaluation Boards have a single-channel and dual-channel 18-bit $\Delta\Sigma$ analog-to-digital converter (ADC), respectively. The MCP3425 Evaluation Board has a single-channel 16-bit ($\Delta\Sigma$) analog-to-digital converter (ADC). The MCP3421/2/5 SOT-23-6 Evaluation Board offers the following headers for simple interfacing:

- Analog CH1 \pm (MCP3421/2/5), CH2 \pm (MCP3422) and GND header (J4)
- PICKit™ Serial Analyzer header (J3)
- MCP2221A Breakout Module interface header (J3)
- mikroBUS™ interface header (J1 and J2).

Figure 1-1, Figure 1-2 and Figure 1-3 show the top and the bottom of the MCP3421/2/5 SOT-23-6 Evaluation Board. The user can connect any sensor input signal and test the ADC conversion results. Both the PICKit™ Serial Analyzer and the MCP2221A Breakout Module can provide a PC Graphic User Interface (GUI) for writing configuration registers and reading ADC conversion values from the MCP3421/2/5 SOT-23-6 Evaluation Board.

The PICKit™ Serial Analyzer connects the PC GUI to the MCP3421/2/5 SOT-23-6 Evaluation Board via an I²C communication bus. The MCP2221A Breakout Module connects the PC GUI to the MCP3421/2/5 SOT-23-6 Evaluation Board via a USB to I²C communication bridge.

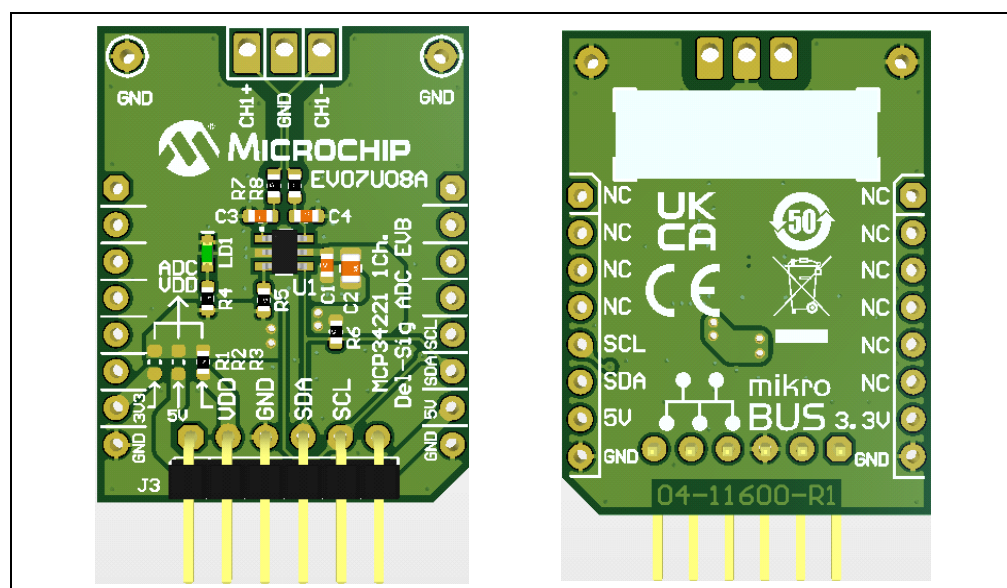


FIGURE 1-1: Top and Bottom Views of the MCP3421 Evaluation Board (EV07U08A).

MCP3421/2/5 SOT-23-6 Evaluation Board User's Guide

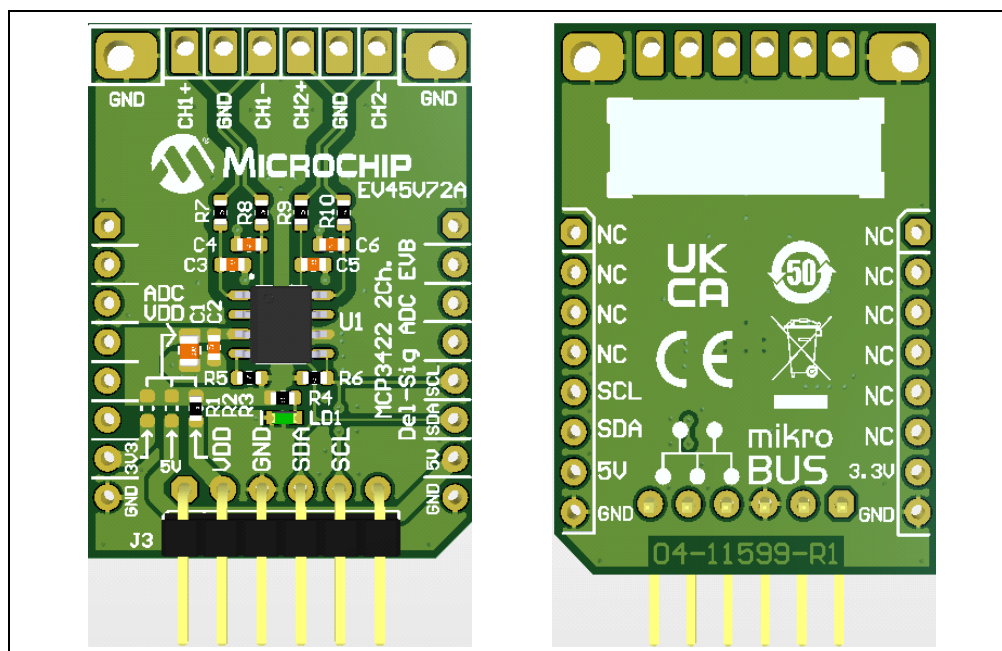


FIGURE 1-2: Top and Bottom Views of the MCP3422 Evaluation Board (EV45V72A).

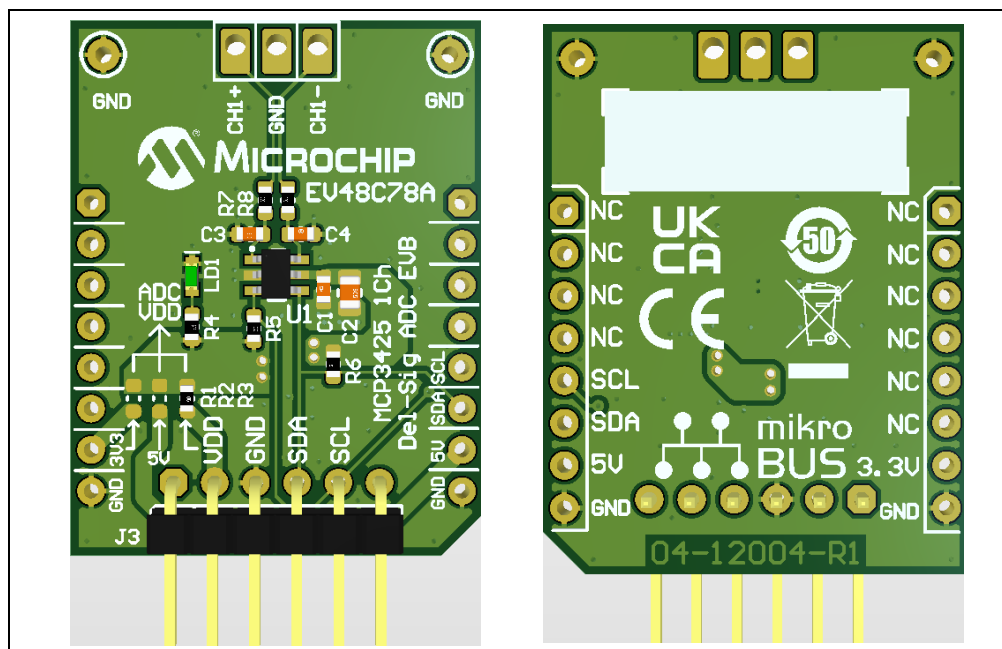


FIGURE 1-3: Top and Bottom Views of the MCP3425 Evaluation Board (EV48C78A).

1.2.1 I²C Address Bits

The Device-Code and I²C Bus Address Bits for the MCP342XA0 devices are '1101' and '000', respectively. These bits are programmed at the factory during production. The Device-Code and I²C Address Bits combine to form an I²C Control-Byte of '0x68' for all Read and Write operations.

Chapter 2. PICkit™ Serial Analyzer

2.1 GETTING STARTED WITH THE PICKIT™ SERIAL ANALYZER

2.1.1 PICkit™ Serial Analyzer and MCP3421/2/5 SOT-23-6 Evaluation Board Hardware Set-Up

The following steps describe how to connect the PICkit™ Serial Analyzer to the MCP3421/2/5 SOT-23-6 Evaluation Board:

1. V_{DD} selection: Use the V_{DD} from the PICkit™ Serial Analyzer or use either the 3.3V or 5V supply voltage from the mikroBUS header. Select the V_{DD} path using the R1, R2, or R3 0Ω resistor/jumper:
 - a) Connect R3, if using V_{DD} from PICkit™ Serial Analyzer;
 - b) Remove R3 and add a 0Ω resistor/jumper to R1 or R2 for 3.3V or 5V, respectively, from the mikroBUS header.
2. Connect the MCP3421/2/5 SOT-23-6 Evaluation Board's J3 pin header to the PICkit™ Serial Analyzer, as shown in [Figure 2-1](#).
3. LED D1 turns on when V_{DD} is applied.
4. Connecting analog inputs: Connect the unused pin (example, V_{IN-}) to V_{SS} for single-ended measurements.
5. Use the PICkit™ Serial Analyzer PC GUI to send I²C Write and Read commands. See [Section 2.2 “Creating Script Files”](#).
6. Execute the PICkit™ Serial Analyzer script file and obtain the ADC conversion results. The conversion results appear on the PICkit™ Serial Analyzer PC GUI.

CAUTION

The analog input pin has ESD diodes. Certain input conditions can damage the device. Please pay attention to the following conditions:

- a) Do not apply input greater than the input range specified by the MCP3421/2/5 data sheets;
- b) Do not apply input signal until V_{DD} is powered-up.

MCP3421/2/5 SOT-23-6 Evaluation Board User's Guide

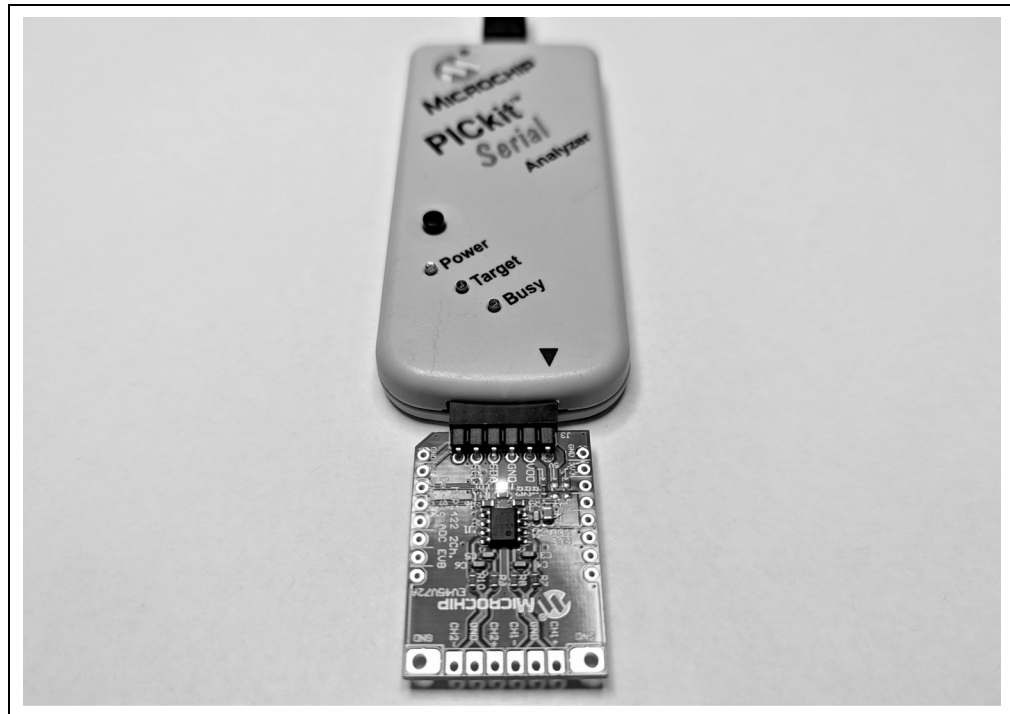


FIGURE 2-1: MCP3421/2/5 SOT-23-6 Evaluation Board with the PICKit™ Serial Analyzer.

2.1.2 PICKit™ Serial Analyzer and MCP3421/2/5 SOT-23-6 Evaluation Board PC Software Set-up

The following steps describe how to set up the PICKit™ Serial Analyzer PC GUI to write the configuration bits of the MCP3421/2/5 devices and read the ADC conversion results.

1. Install the PICKit™ Serial Analyzer software on a PC.
2. Connect the USB cable between the PICKit™ Serial Analyzer and the PC.
3. Run the PICKit™ Serial PC Software. [Figure 2-2](#) displays the GUI. Click the **Next** button to configure the PICKit™ Serial Analyzer.



FIGURE 2-2: PICKit™ Serial Analyzer Configuration Wizard Welcome Window.

4. Select the **I²C Master** option as communication mode, then click the **Next** button.

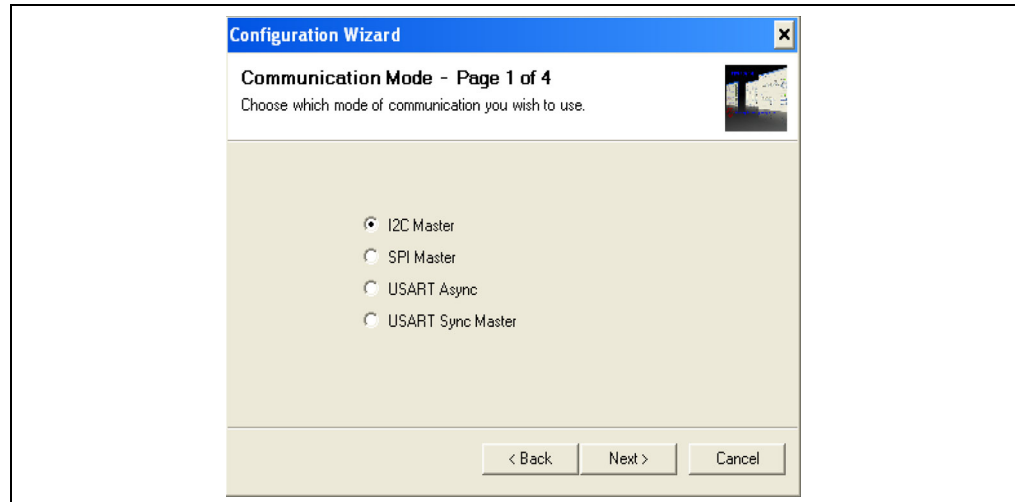


FIGURE 2-3: Communication Mode Selection.

MCP3421/2/5 SOT-23-6 Evaluation Board User's Guide

5. Select either **100 kHz** or **400 kHz**. Click the **Next** button.

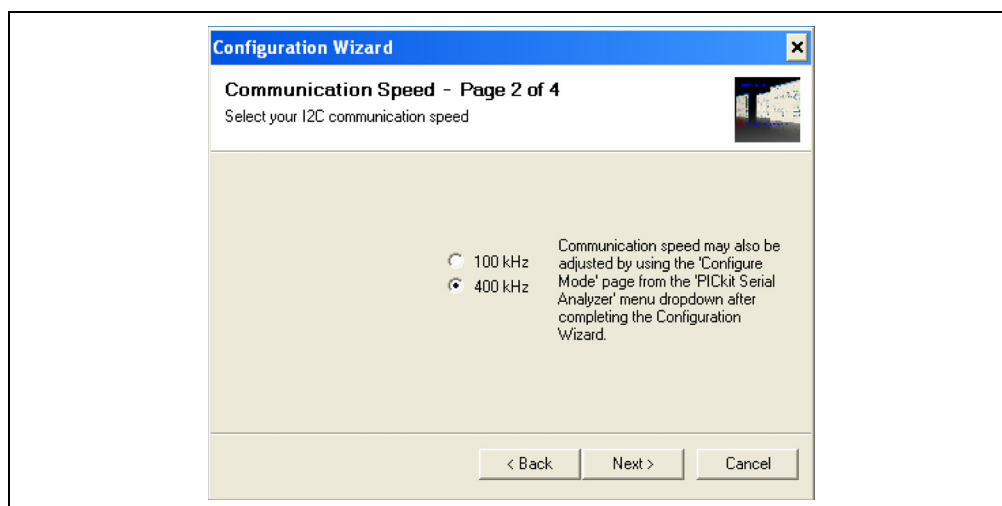


FIGURE 2-4: I²C Communication Speed Window.

Note: The MCP3421/2/5 devices support the I²C bus data rate up to 3.4 MHz, but the current version of the PICKit™ Serial Analyzer supports an I²C bus data rate up to 400 kHz only.

6. Select **No**, as shown in [Figure 2-5](#), then click the **Next** button.

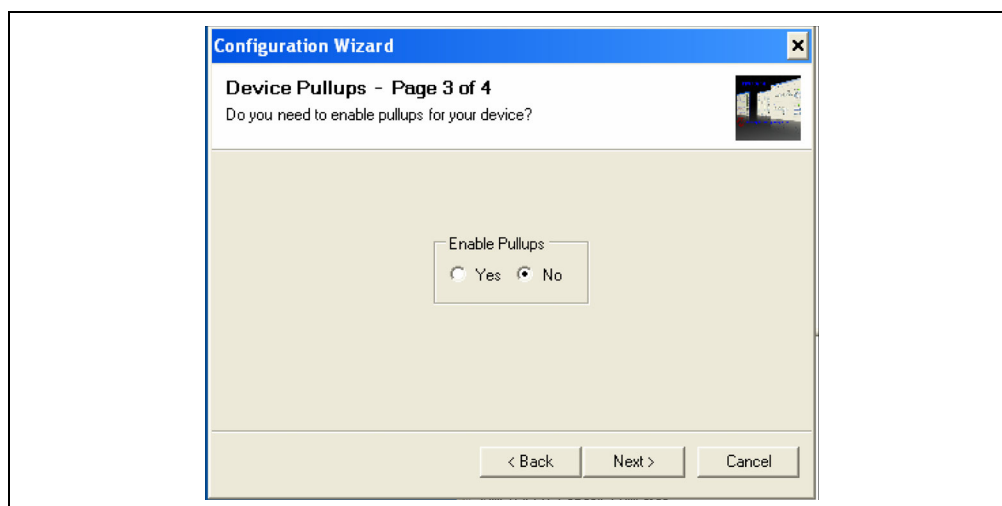


FIGURE 2-5: Device Pull-ups Window.

Note: The MCP3421/2/5 SOT-23-6 Evaluation Board has its own pull-up resistors. Therefore, additional pull-up resistors from the PICKit™ Serial Analyzer are not needed.

7. Select the V_{DD} voltage of the MCP3421/2/5 SOT-23-6 Evaluation Board and click the **Next** button.

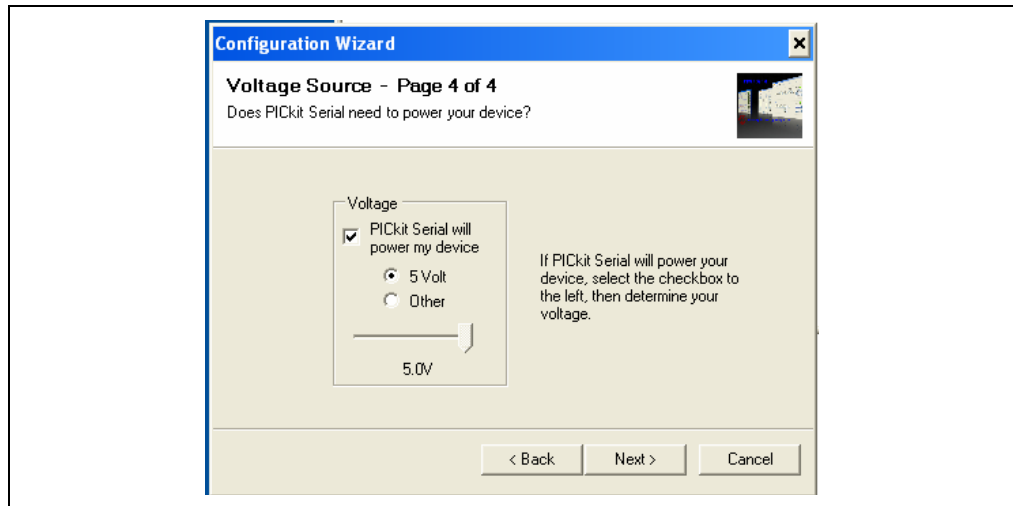


FIGURE 2-6: Voltage Source Selection Window.

Case 1 – PICkit™ Serial Analyzer V_{DD} power supply:

- a) By choosing the “PICkit™ Serial will power my device” option and selecting the **5 Volt** radio button, as shown in Figure 2-6, the MCP3421/2/5 SOT-23-6 Evaluation Board will be powered by the 5V DC output of the PICkit™ Serial Analyzer through the R3 0Ω resistor/jumper.

Case 2 – External V_{DD} power supply:

- a) Option 1 - mikroBUS header *with* an 8/16/32-Bit Microchip Evaluation Board:
In this case, either R1 or R2 can be populated with a 0Ω resistor/jumper.
 - b) Option 2 - mikroBUS header *without* an 8/16/32-Bit Microchip Evaluation Board:
In this case, either R1 or R2 can be populated with a 0Ω resistor/jumper with an external power supply applied to the 3.3V pad at J1 or the 5V pad at J2 of the mikroBUS header.
8. Click the **OK** button to complete the configuration. The MCP3421/2/5 SOT-23-6 Evaluation Board can now be configured using the PICkit™ Serial Analyzer.

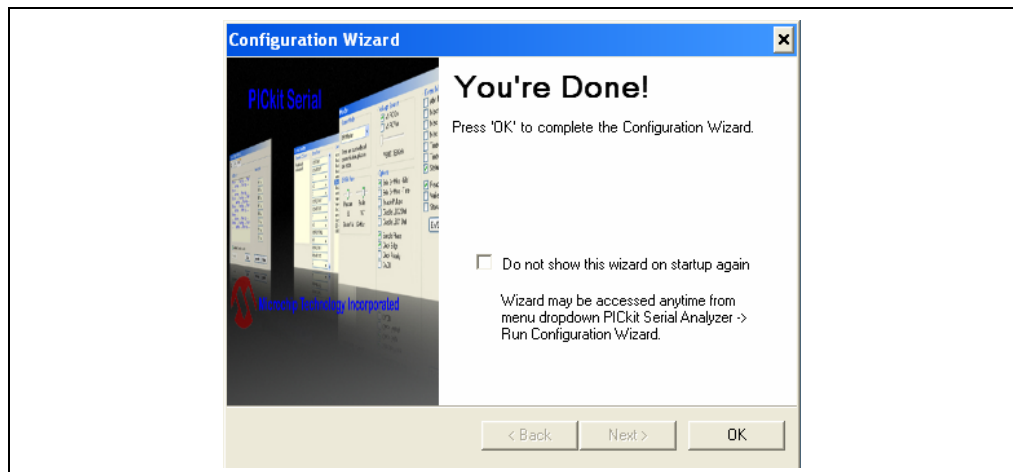


FIGURE 2-7: Configuration Wizard – Final Step.

MCP3421/2/5 SOT-23-6 Evaluation Board User's Guide

2.2 CREATING SCRIPT FILES

To establish communication between the PICKit™ Serial Analyzer and the MCP3421/2/5 SOT-23-6 Evaluation Board, a Script File is needed. The following sections explain I²C Script Files for the MCP3421/2/5 Read/Write operations.

2.2.1 Creating a Script File

To create an I²C Command Script for Read and Write operations of the MCP3421/2/5 devices, click the **Communication** tab from the Top Bar menu, then select Script, then click the Script Builder option, as shown in [Figure 2-8](#).

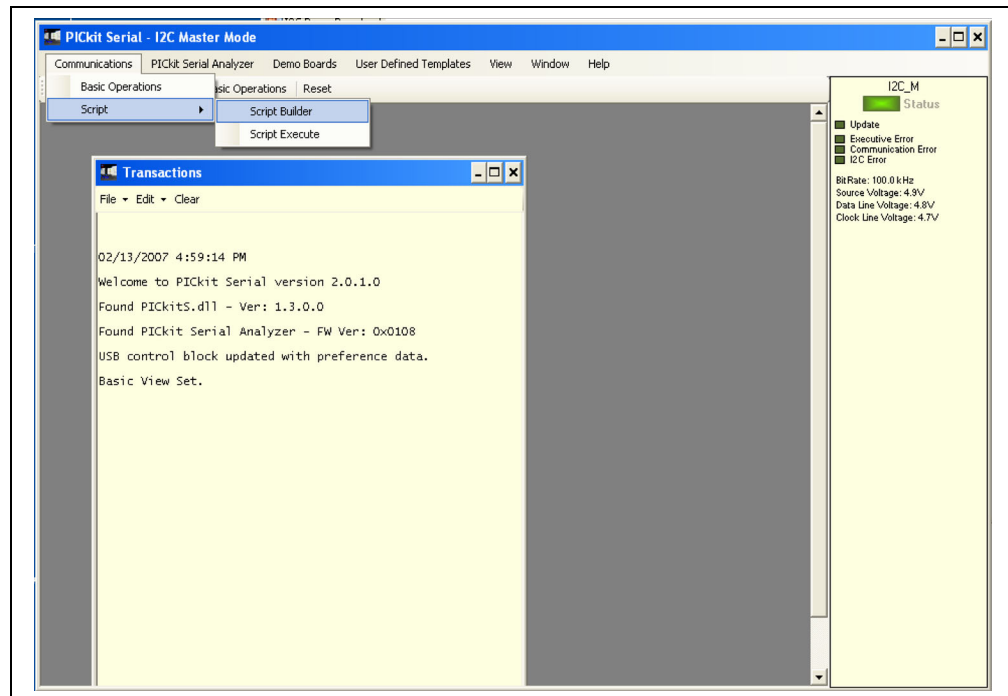


FIGURE 2-8: Creating a Script File with Script Builder.

2.2.2 Writing the Configuration Register

1. Click the **WriteBlockAddrA8** in the “Example I²C Scripts” column to fill in the parameters of the “Script Detail” column. Right-click the “Script Detail” column to change the parameters.
2. Under the Script Detail box, select an item in the parameter box.
3. Right-click the parameter box for the option menu to appear to the right of the selection.
4. Select the desired options (delete or insert the parameter box).
5. To add a new I²C command, select I2CM and then select the desired command from the list.
6. Keep the I2CSTART, I2CWRTBYT and I2CSTOP parameters in the same order as shown below. Address bits A2, A1, and A0 are 0, 0 and 0, respectively, for the MCP3421/2/5 devices populated on the MCP3421/2/5 SOT-23-6 Evaluation Board. See the MCP3421/2/5 data sheets for more information regarding address bit selection.
7. Change the fourth and fifth parameter values in the “Script Detail” column per the desired device operation (see [Figure 2-9](#)).

Note: Note that the 0C in the configuration byte selects the following options:

- Channel Selection: Channel 1
- Conversion Mode: One-Shot Conversion
- Sample Rate(Resolution): 3.75 SPS (18-bit)
- Gain Selection: 1x

2.2.3 Saving and Executing the Script File

1. Type in any script name (e.g. MCP3421_WR) in the space under the “Script Name” field.
2. Click the **Save Script** button.
3. Click the **Execute Script** button.
 - At this point, the PICKit™ Serial Analyzer transmits the I²C command to the MCP3421/2/5 SOT-23-6 Evaluation Board. The **Busy** LED on the PICKit™ Serial Analyzer will momentarily turn on and then turn off. If the LED remains on, a communications problem has occurred. Remove the PICKit™ Serial Analyzer from the computer and re-check the parameter values, including the order of parameters under the “Script Detail” column. Try again until the **Busy** LED goes off immediately after executing the I²C command.
 - The saved file name appears in “Users I²C Scripts” column and can be reused any time by selecting the file name.

MCP3421/2/5 SOT-23-6 Evaluation Board User's Guide

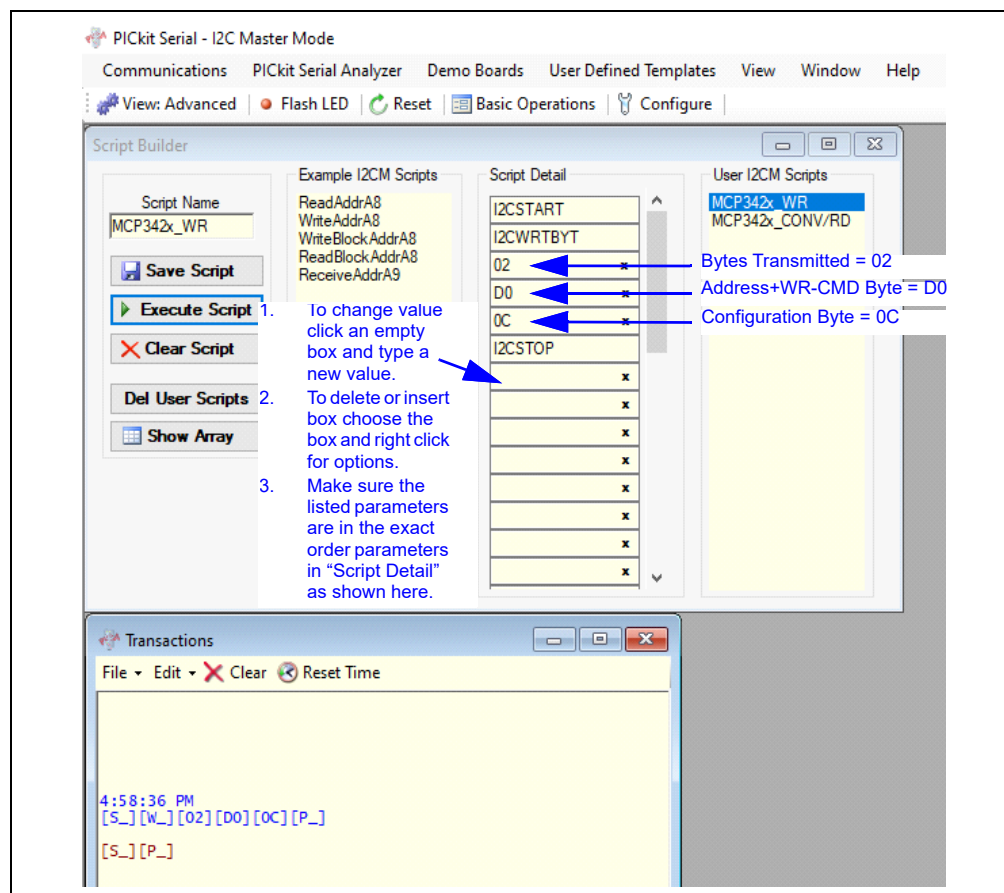


FIGURE 2-9: PICKit™ Serial I²C Write Command.

2.2.4 Reading Conversion Data

1. Click on **ReadAddrA8** in the “Example I²C Scripts” column to fill in the parameters of the “Script Detail” column. Right-click the “Script Detail” column to change the parameters.
2. Under the “Script Detail” box, select an item in the parameter box.
3. Right-click the parameter box for the option menu to appear to the right of the selection.
4. Select the desired options (delete or insert the parameter box).
5. To add a new I²C command select I2CM and then select the desired command from the list.
6. Keep the I2CSTART, I2CWRTBYT, WAIT1, I2CRESTART, I2CRDBYTNLB and I2CSTOP (after 4 Bytes Received) parameters in the same order as shown below. Address bits A2, A1, and A0 are 0, 0 and 0, respectively, for the MCP3421/2/5 devices populated on the MCP3421/2/5 SOT-23-6 Evaluation Board. See the MCP3421/2/5 data sheets for more information regarding address bit selection.
7. Change the 4th, 5th, 7th, 8th, 12th and 14th parameter values in the “Script Detail” column per the desired device operation (see [Figure 2-10](#)).

Once all parameters have been entered the script can be saved by clicking the **Save Script** button and then executed by clicking on the **Execute Script** button.

Note: For a comprehensive explanation of the PICKit™ Serial Analyzer PC Software see DS51647C.

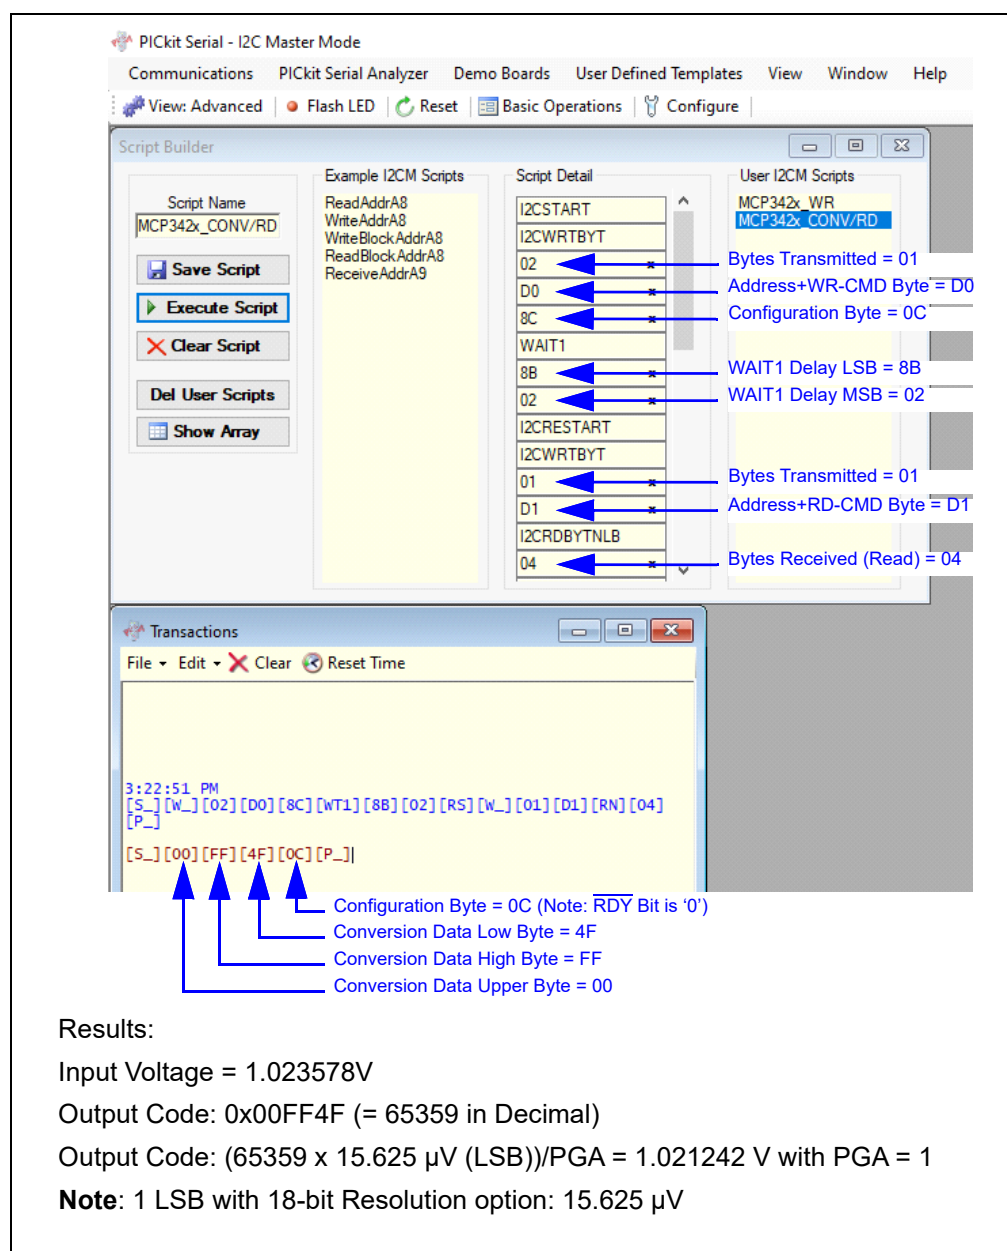


FIGURE 2-10: PICkit™ Serial I²C Conversion and Read Command.

MCP3421/2/5 SOT-23-6 Evaluation Board User's Guide

NOTES:

Chapter 3. MCP2221A Breakout Module

3.1 GETTING STARTED WITH THE MCP2221A BREAKOUT MODULE

3.1.1 MCP2221A Breakout Module and MCP3421/2/5 SOT-23-6 Evaluation Board Hardware Set-Up

The following steps describe how to connect the MCP2221A Breakout Module to the MCP3421/2/5 SOT-23-6 Evaluation Board.

1. V_{DD} selection: When using the MCP2221A Breakout Module the 0Ω R3 resistor/jumper is recommended, i.e. not R1 or R2, to avoid contention between the power supplied by the MCP2221A Breakout Module and the power available from the mikroBUS header.
2. Configure the MCP2221A Breakout Module output supply voltage for either 3.3V or 5V via the J4 jumper.
3. Configure the I²C Bus SCL and SDA pull-ups via the JP2 and JP3 jumpers.
4. Connect the MCP3421/2/5 SOT-23-6 Evaluation Board's J3 pin header to the MCP2221A Breakout Module.
5. LED LD1 turns on when V_{DD} is applied.
6. Connecting analog inputs: Connect unused pins (example, V_{IN-}) to V_{SS} for single-ended measurements.
7. Use the MCP2221A Breakout Module PC GUI to send I²C Write and Read Commands. See [Section 3.2 "Creating Command List Files"](#).
8. Execute the MCP2221A Breakout Module Command List File and obtain the ADC conversion results. The conversion results appear in the MCP2221A I²C/SMBus Terminal GUI.

CAUTION

The analog input pin has ESD diodes. Certain input conditions can damage the device. Please pay attention to the following conditions:

- a) Do not apply input greater than the input range specified by the MCP3421/2/5 data sheets.
- b) Apply input signal after V_{DD} is powered-up.

3.1.2 MCP2221A Breakout Module and MCP3421/2/5 SOT-23-6 Evaluation Board PC Software Set-Up

The following steps describe how to set up the MCP2221A I²C/SMBus Terminal software to write the configuration bits of the MCP3421/2/5 devices and read the ADC conversion results.

1. Install the MCP2221A I²C/SMBus Terminal software onto a personal computer (PC).
2. Connect the USB cable between the MCP2221A Breakout Module and the PC.
3. Run the MCP2221A I²C/SMBus Terminal PC Software. The GUI will appear as shown in [Figure 3-1](#).

MCP3421/2/5 SOT-23-6 Evaluation Board User's Guide

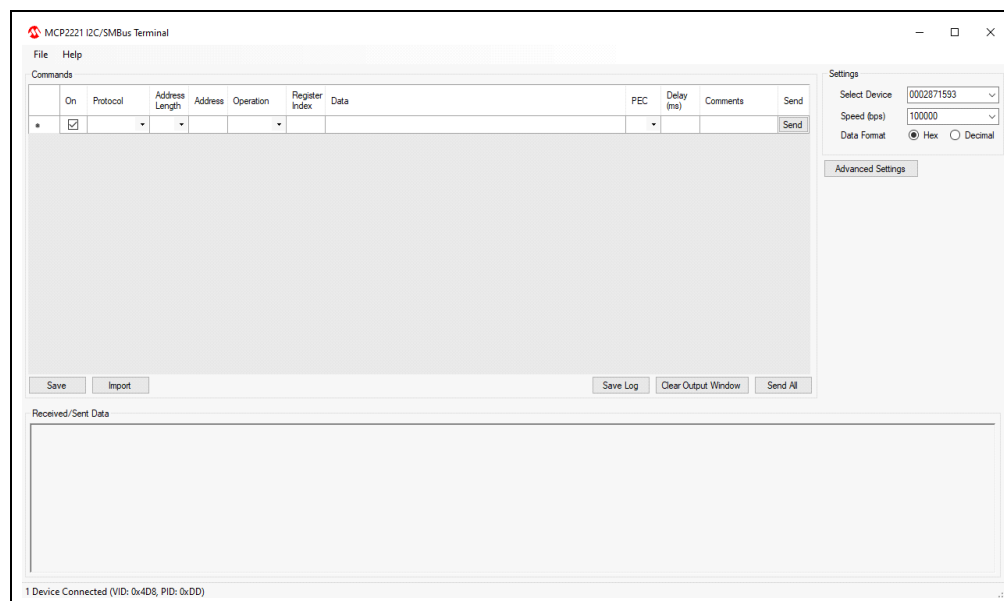


FIGURE 3-1: MCP2221A I²C/SMBus Terminal Window.

3.2 CREATING COMMAND LIST FILES

To establish communication between the MCP2221A I²C/SMBus Terminal and a MCP3421/2/5 SOT-23-6 Evaluation Board, a command list is needed. The following sections explain I²C Commands Lists for the MCP3421/2/5 Read/Write operations.

3.2.1 Creating a Command List

To create an I²C Command List for Read and Write operations of the MCP3421/2/5 devices, select I²C under the Protocol column. At this point, a new command row will automatically be added to the command list below the current command row. The following steps will be used to create a set of executable commands to Write the Configuration register.

3.2.2 Writing the Configuration Register

1. Select 7-bit for the "Address Length".
2. Enter the Device Code (1101) and Address Bits (000) as a 7-bit value of '1101000' (0x68) for the "Address".
3. Select Write for the "Operation".
4. The "Register Index" is for SMBus operation *only* and should be left blank.
5. The "Data" value (hex format) will specify the value to be written to the Configuration Register.
6. The "PEC" (Packet Error Check) is for SMBus operation *only* and should be left blank.
7. A "Delay" (in milliseconds) can be inserted following execution of the current command; i.e. between the current command the next command, if required.
8. "Comments" can be added to describe the operation executed by the command.

Note: Note that the 0x0C in the Data column selects the following options:

- Channel Selection: Channel 1
- Conversion Mode: One-Shot Conversion
- Sample Rate(Resolution): 3.75 SPS (18-bit)
- Gain Selection: 1x

3.2.3 Saving and Executing the Command List

There are two ways to save the current Command List.

1. Simply select File from the menu bar and select Save Command List.
2. Click on the **Save** button located at the bottom-left of the “Commands” dialog.

There are also two ways to execute a command:

1. Click on the **Send** button located to the right of the “Comments” column.
2. Click on the **Send All** button located at the bottom-right of the “Commands” dialog to execute all commands in the “Commands” dialog list.
 - At this point, the MCP32221A Breakout Module transmits the I²C Write command to the MCP3421/2/5 SOT-23-6 Evaluation Board. The “Received/Sent Data” dialog will display a summary of the command(s) executed, e.g. “> I²C Write, Address = 0x68, Data: 0C Delay = 0”.
 - The “Received/Sent Data” dialog will also display an *OK* acknowledgment indicating the command was properly executed, or an *Address NACK received* non-acknowledgment indicating an error has occurred when sending the command (see [Figure 3-2](#)).
 - It should be noted the **Send All** button is the only way to execute a Delay.

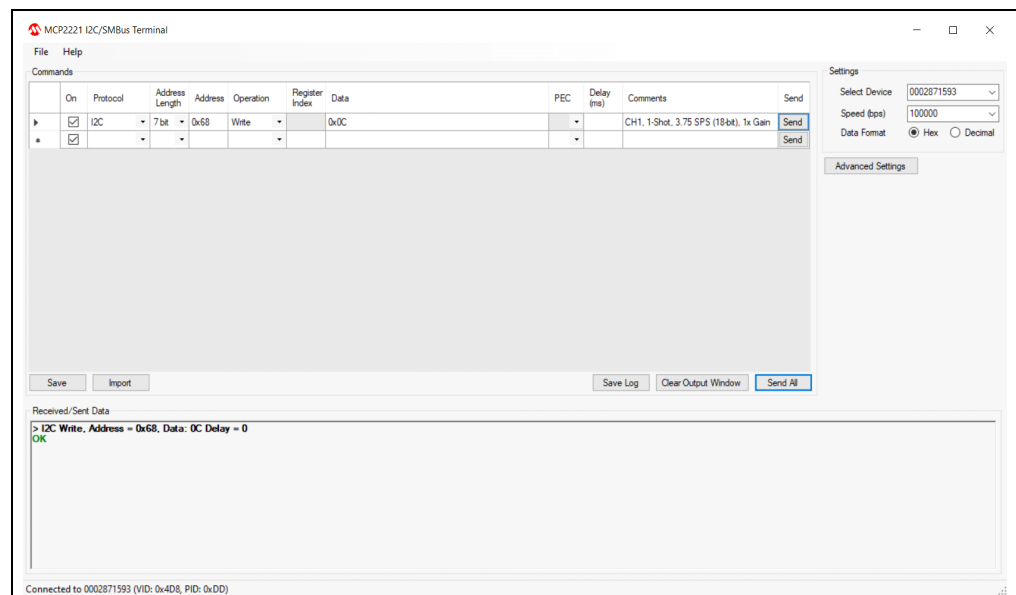


FIGURE 3-2: MCP2221A Breakout Module I²C Write Command.


MCP3421/2/5 SOT-23-6 Evaluation Board User's Guide

3.2.4 Reading Conversion Data

1. Select 7-bit for the "Address Length".
2. Enter the Device Code (1101) and Address Bits (000) as a 7-bit value of '1101000' (0x68) for the "Address".
3. Select Read for the "Operation".
4. The "Register Index" is for SMBus operation *only* and should be left blank.
5. The "Data" value (hex format) will specify the number of bytes to be read from the device. The number of bytes will depend on the Sample Rate/Resolution set in the Configuration Register. After the conversion data has been read, any additional bytes requested will read the contents of the Configuration Register.
6. The "PEC" (Packet Error Check) is for SMBus operation *only* and should be left blank.
7. A "Delay" (in milliseconds) can be inserted between the previous command and the current command, if required.
8. "Comments" can be added to describe the operation executed by the command.

Once all commands have been entered in the Command dialog the Command List can be saved by clicking the **Save** button (or *File>Save Command List*) and then executed by clicking on the **Send All** button (see [Figure 3-3](#)).

Note: For a comprehensive explanation of the MCP2221A Breakout Module I²C/SMBus Terminal PC Software see DS50002282.

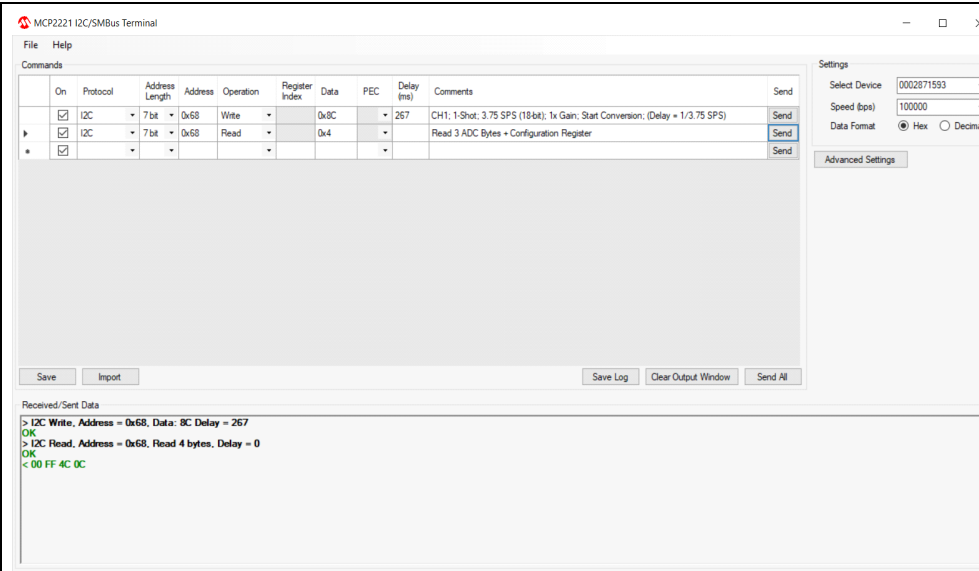

The screenshot shows the MCP2221 I2C/SMBus Terminal application. The 'Commands' table contains two entries:

On	Protocol	Address Length	Address	Operation	Register Index	Data	PEC	Delay (ms)	Comments	Send
<input checked="" type="checkbox"/>	I2C	7 bit	0x68	Write		0x8C		267	CH1; 1-Shot; 3.75 SPS (18bit); 1x Gain; Start Conversion; (Delay = 1/3.75 SPS)	Send
<input checked="" type="checkbox"/>	I2C	7 bit	0x68	Read		0x4			Read 3 ADC Bytes + Configuration Register	Send

The 'Received/Sent Data' window shows the following log:

```
> I2C Write, Address = 0x68, Data: 8C Delay = 267
OK
> I2C Read, Address = 0x68, Read 4 bytes, Delay = 0
OK
< 00 FF 4C 0C
```

At the bottom, the connection status is displayed: 'Connected to 0002871593 (VID: 0x4D8, PID: 0xDD)'.

Results:
Input Voltage = 1.022778V
Output Code: 0x00FF4C (= 65356 in Decimal)
Output Code: (65356 x 15.625 μ V (LSB)) / PGA = 1.021195V with PGA = 1
Note: 1 LSB with 18-bit Resolution option: 15.625 μ V

FIGURE 3-3: MCP2221A Breakout Module I²C Conversion and Read Command (Input Voltage 1.022778V).

Appendix A. Schematic and Layouts


A.1 INTRODUCTION

This appendix contains the following schematics and layouts for the MCP3421/2/5 SOT-23-6 Evaluation Board.


- MCP3421 Schematic
- MCP3422 Schematic
- MCP3425 Schematic

MCP3421/2/5 SOT-23-6 Evaluation Board User's Guide

A.2 MCP3421 SCHEMATIC

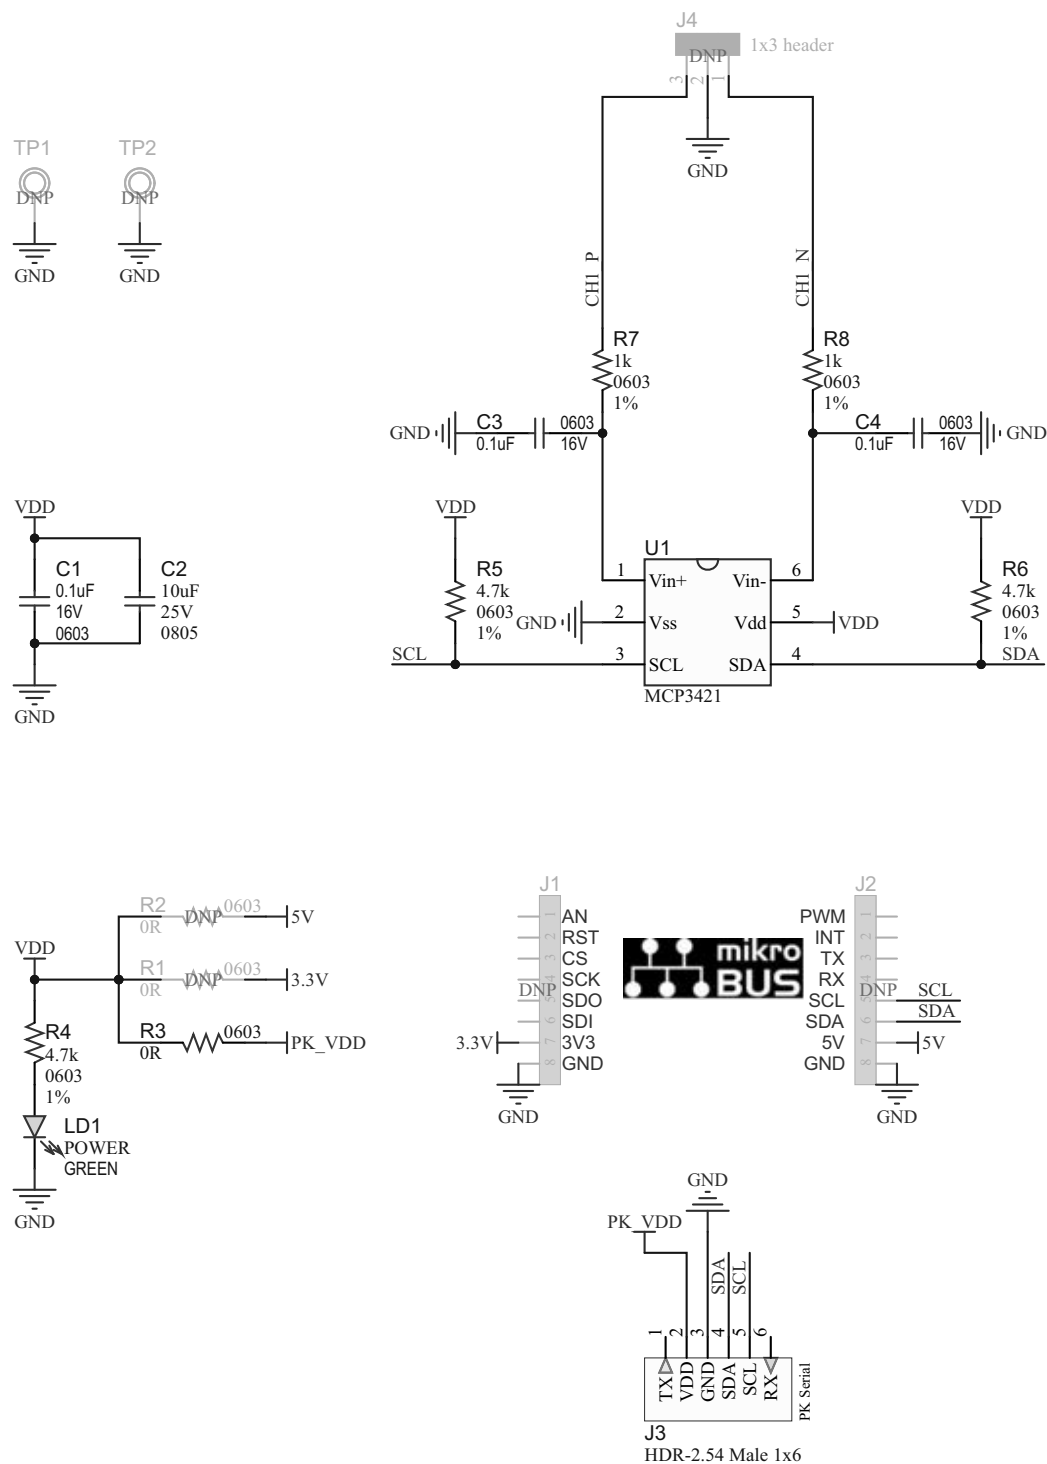


A.3 MCP3422 SCHEMATIC

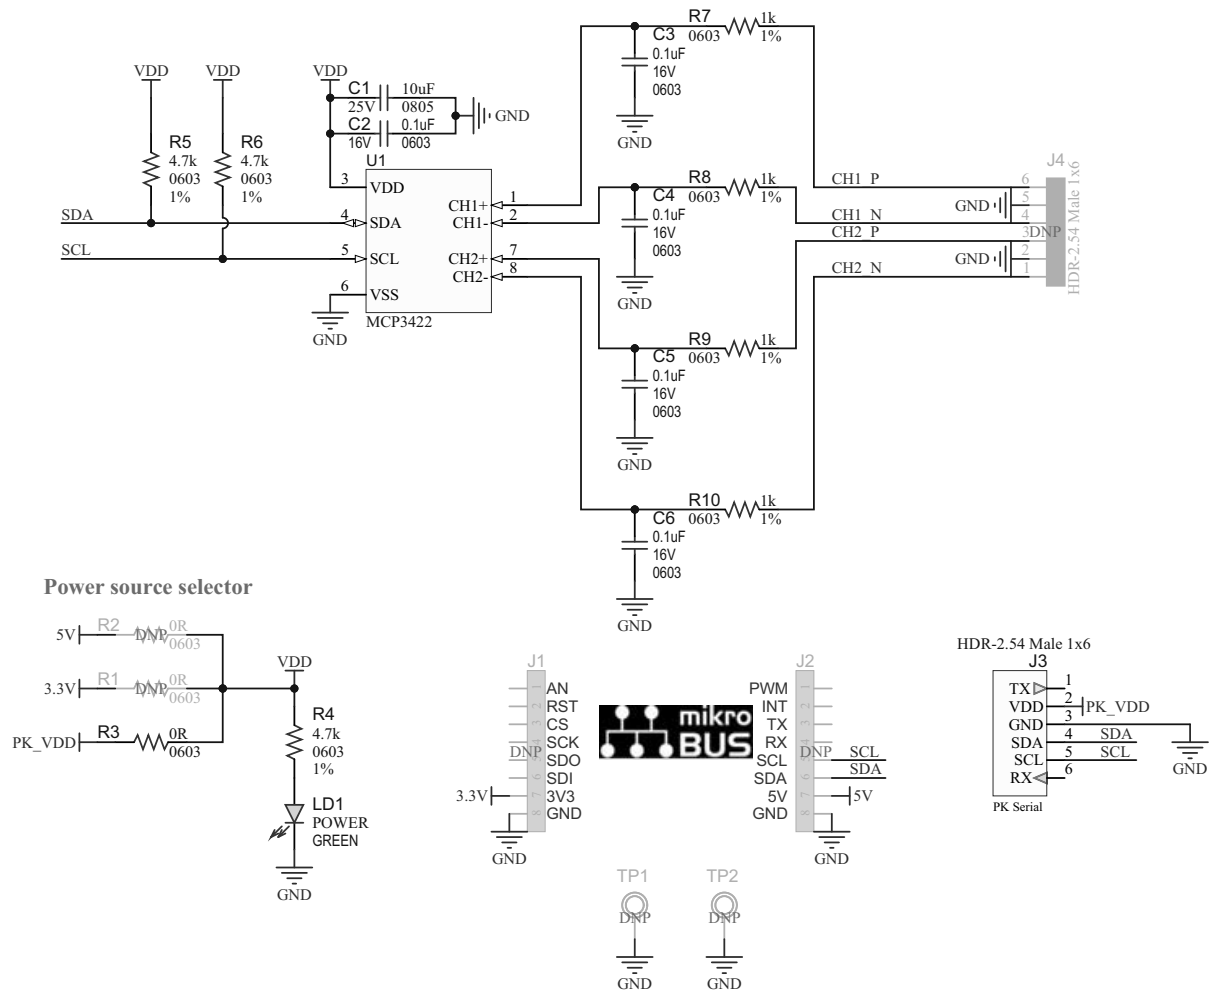

MCP3421/2/5 SOT-23-6 Evaluation Board User's Guide

A.4 MCP3425 SCHEMATIC

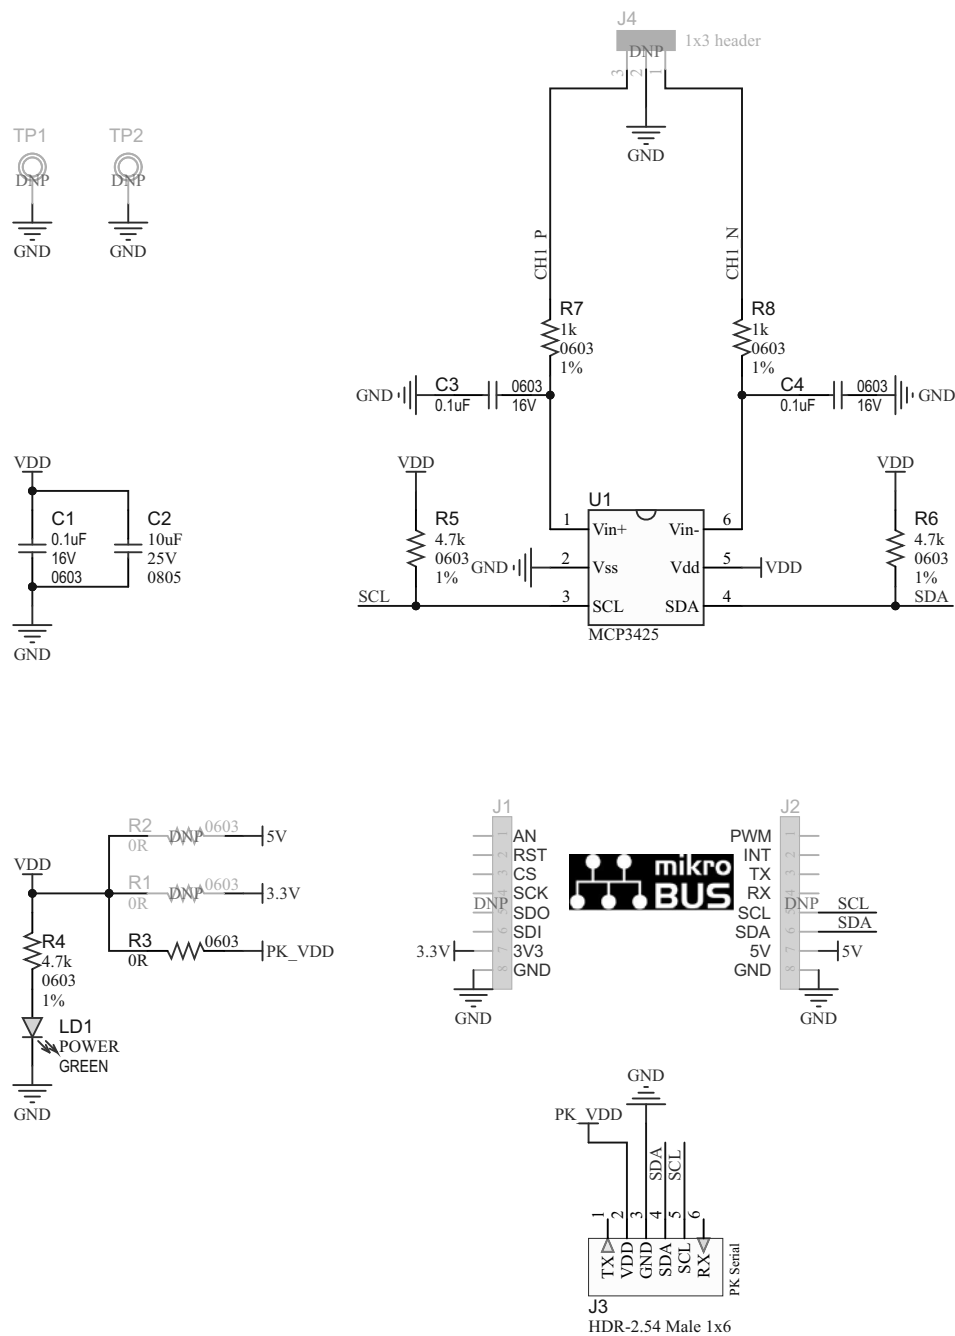

Appendix B. Bill of Materials (BOM)

TABLE B-1: MCP3421 BILL OF MATERIALS (BOM)

Qty.	Reference	Description	Manufacturer	Part Number
3	C1, C3, C4	Capacitor, ceramic, 0.1 μ F, 16V, 10%, X7R, surface mount, 0603	Taiyo Yuden Co., Ltd.	EMK107B7104KA-T
1	C2	Capacitor, ceramic, 10 μ F, 25V, 10%, X5R, surface mount, 0805	Murata Electronics®	GRM21BR61E106KA73L
0	J1, J2	Connector, Header 2.54, male, 1x8, gold, 5.84MH, TH	FCI	68001-108HLF
1	J3	Connector, Header-2.54, male, 1x6, gold, 5.84MH, TH, R/A	FCI	68016-106HLF
0	J4	Connector, Header-2.54, male, 1x3, gold, 6.10MH, TH, vertical	METZ CONNECT GmbH	PR20203VBNN
1	LABEL1	Label, PCBA, 18x6 mm, Datamatrix, Assy#/Rev/Serial/Date	ACT Logimark AS	505462
1	LD1	Diode, LED, green, 3.2V, 20 mA, 430 mcd, clear, SMD 0603	Würth Elektronik	150060GS75000
0	R1	Resistor, TKF, 0R, 1/10W, surface mount, 0603, AEC-Q200	Panasonic® – ECG	ERJ-3GEY0R00V
0	R2	Resistor, TKF, 0R, 1/10W, surface mount, 0603, AEC-Q200	Panasonic – ECG	ERJ-3GEY0R00V
1	R3	Resistor, TKF 0R 1/10W surface mount, 0603, AEC-Q200	Panasonic – ECG	ERJ-3GEY0R00V
3	R4, R5, R6	Resistor, TKF, 4.7 k Ω , 1%, 1/10W, surface mount, 0603	Digi-Key® Electronics	311-4.70KHRTR-ND
2	R7, R8	Resistor, TKF, 1 k Ω , 1%, 1/10W, surface mount, 0603	Vishay/Dale	CRCW06031K00FKEA
0	TP1, TP2	Misc., Test point, multi purpose, mini, black	Keystone® Electronics Corp.	5001
1	U1	Microchip, Analog, ADC-Delta Sigma 18-bit MCP3421A0T-E/CH, SOT-23-6	Microchip Technology Inc.	MCP3421A0T-E/CH

TABLE B-2: MCP3422 BILL OF MATERIALS (BOM)

Qty.	Reference	Description	Manufacturer	Part Number
1	C1	Capacitor, ceramic, 10 μ F, 25V, 10%, X5R, surface mount, 0805	Murata Electronics®	GRM21BR61E106KA73L
5	C2, C3, C4, C5, C6	Capacitor, ceramic, 0.1 μ F 16V 10% X7R, surface mount, 0603	Taiyo Yuden Co., Ltd.	EMK107B7104KA-T
2	J1, J2	Connector, Header-2.54, male, 1x8, gold, 5.84MH, TH – DO NOT POPULATE	FCI	68001-108HLF
1	J3	Connector, Header-2.54, male, 1x6, gold, 5.84MH, TH, R/A	FCI	68016-106HLF
1	J4	Connector, Header-2.54, male, 1x6, gold, 5.84MH, TH, vertical – DO NOT POPULATE	FCI	68000-106HLF

MCP3421/2/5 SOT-23-6 Evaluation Board User's Guide

TABLE B-2: MCP3422 BILL OF MATERIALS (BOM) (CONTINUED)

Qty.	Reference	Description	Manufacturer	Part Number
1	LABEL1	Label, PCBA, 18x6mm, Datamatrix, Assy#/Rev/Serial/Date	ACT Logimark AS	505462
1	LD1	Diode, LED, green, 3.2V, 20 mA, 430 mcd, clear, surface mount, 0603	Würth Elektronik	150060GS75000
2	R1, R2	Resistor, TKF, 0R, 1/10W, surface mount, 0603, AEC-Q200 – DO NOT POPULATE	Panasonic® – ECG	ERJ-3GEY0R00V
1	R3	Resistor, TKF, 0R, 1/10W, surface mount, 0603, AEC-Q200	Panasonic – ECG	ERJ-3GEY0R00V
3	R4, R5, R6	Resistor, TKF, 4.7 kΩ, 1%, 1/10W, surface mount, 0603	Digi-Key® Electronics	311-4.70KHRTR-ND
4	R7, R8, R9, R10	Resistor, TKF, 1 kΩ, 1%, 1/10W, surface mount, 0603	Vishay/Dale	CRCW06031K00FKEA
2	TP1, TP2	Misc., test point, multi purpose, mini, black, – DO NOT POPULATE	Keystone Electronics Corp.	5001
1	U1	Microchip, Analog, ADC-Delta Sigma 18-bit MCP3422A0T-E/SN, SOIC-8	Microchip Technology Inc.	MCP3422A0T-E/SN

TABLE B-3: MCP3425 BILL OF MATERIALS (BOM)

Qty.	Reference	Description	Manufacturer	Part Number
3	C1, C3, C4	Capacitor, ceramic, 0.1 μF, 16V, 10%, X7R, SMD, 0603	Samsung Group	CL10B104KO8NNNC
1	C2	Capacitor, ceramic, 10 μF, 25V, 10%, X5R, SMD, 0805	Murata Electronics®	GRM21BR61E106KA73L
0	J1, J2	Connector, header-2.54, male, 1x8, gold, 5.84MH, TH	Amphenol ICC (FCI)	68001-108HLF
1	J3	Connector, header-2.54, male, 1x6, gold, 5.84MH, TH, R/A	Würth Elektronik	61300611021
0	J4	Connector, HDR-2.54 male, 1x3, gold 6.10MH, TH, vertical	METZ CONNECT GmbH	PR20203VBNN
1	LABEL1	Label, PCBA, 18x6 mm, Datamatrix Assy# / Rev / Serial / Date	ACT Logimark AS	505462
1	LD1	Diode, LED, green, 3.2V, 20 mA, 430mcd, clear, SMD, 0603	Würth Elektronik	150060GS75000
0	R1	Resistor, TKF, 0R, 1/10W, SMD, 0603, AEC-Q200	Panasonic® – ECG	ERJ-3GEY0R00V
0	R2	Resistor, TKF, 0R, 1/10W, SMD, 0603, AEC-Q200	Vishay/Dale	CRCW060300000Z0EB
1	R3	Resistor, TKF, 0R, 1/10W, SMD, 0603, AEC-Q200	Vishay/Dale	CRCW060300000Z0EB
3	R4, R5, R6	Resistor, TKF, 4.7kΩ, 1%, 1/10W, SMD, 0603	Stackpole Electronics, Inc.	RMCF0603FT4K70
2	R7, R8	Resistor, TKF, 1 kΩ, 1%, 1/10W, SMD, 0603	Stackpole Electronics, Inc.	RMCF0603FT1K00
0	TP1, TP2	Misc., test point, multi purpose, mini, black	Keystone® Electronics Corp.	5001
1	U1	Microchip, Analog, ADC-Delta Sigma, 16-bit, MCP3425A0T-E/CH, SOT-23-6	Microchip Technology Inc.	MCP3425A0T-E/CH

Worldwide Sales and Service

AMERICAS

Corporate Office
2355 West Chandler Blvd.
Chandler, AZ 85224-6199
Tel: 480-792-7200
Fax: 480-792-7277
Technical Support:
<http://www.microchip.com/support>
Web Address:
www.microchip.com

Atlanta
Duluth, GA
Tel: 678-957-9614
Fax: 678-957-1455

Austin, TX
Tel: 512-257-3370

Boston
Westborough, MA
Tel: 774-760-0087
Fax: 774-760-0088

Chicago
Itasca, IL
Tel: 630-285-0071
Fax: 630-285-0075

Dallas
Addison, TX
Tel: 972-818-7423
Fax: 972-818-2924

Detroit
Novi, MI
Tel: 248-848-4000

Houston, TX
Tel: 281-894-5983

Indianapolis
Noblesville, IN
Tel: 317-773-8323
Fax: 317-773-5453
Tel: 317-536-2380

Los Angeles
Mission Viejo, CA
Tel: 949-462-9523
Fax: 949-462-9608
Tel: 951-273-7800

Raleigh, NC
Tel: 919-844-7510

New York, NY
Tel: 631-435-6000

San Jose, CA
Tel: 408-735-9110
Tel: 408-436-4270

Canada - Toronto
Tel: 905-695-1980
Fax: 905-695-2078

ASIA/PACIFIC

Australia - Sydney
Tel: 61-2-9868-6733

China - Beijing
Tel: 86-10-8569-7000

China - Chengdu
Tel: 86-28-8665-5511

China - Chongqing
Tel: 86-23-8980-9588

China - Dongguan
Tel: 86-769-8702-9880

China - Guangzhou
Tel: 86-20-8755-8029

China - Hangzhou
Tel: 86-571-8792-8115

China - Hong Kong SAR
Tel: 852-2943-5100

China - Nanjing
Tel: 86-25-8473-2460

China - Qingdao
Tel: 86-532-8502-7355

China - Shanghai
Tel: 86-21-3326-8000

China - Shenyang
Tel: 86-24-2334-2829

China - Shenzhen
Tel: 86-755-8864-2200

China - Suzhou
Tel: 86-186-6233-1526

China - Wuhan
Tel: 86-27-5980-5300

China - Xian
Tel: 86-29-8833-7252

China - Xiamen
Tel: 86-592-2388138

China - Zhuhai
Tel: 86-756-3210040

ASIA/PACIFIC

India - Bangalore
Tel: 91-80-3090-4444

India - New Delhi
Tel: 91-11-4160-8631

India - Pune
Tel: 91-20-4121-0141

Japan - Osaka
Tel: 81-6-6152-7160

Japan - Tokyo
Tel: 81-3-6880-3770

Korea - Daegu
Tel: 82-53-744-4301

Korea - Seoul
Tel: 82-2-554-7200

Malaysia - Kuala Lumpur
Tel: 60-3-7651-7906

Malaysia - Penang
Tel: 60-4-227-8870

Philippines - Manila
Tel: 63-2-634-9065

Singapore
Tel: 65-6334-8870

Taiwan - Hsin Chu
Tel: 886-3-577-8366

Taiwan - Kaohsiung
Tel: 886-7-213-7830

Taiwan - Taipei
Tel: 886-2-2508-8600

Thailand - Bangkok
Tel: 66-2-694-1351

Vietnam - Ho Chi Minh
Tel: 84-28-5448-2100

EUROPE

Austria - Wels
Tel: 43-7242-2244-39
Fax: 43-7242-2244-393

Denmark - Copenhagen
Tel: 45-4485-5910
Fax: 45-4485-2829

Finland - Espoo
Tel: 358-9-4520-820

France - Paris
Tel: 33-1-69-53-63-20
Fax: 33-1-69-30-90-79

Germany - Garching
Tel: 49-8931-9700

Germany - Haan
Tel: 49-2129-3766400

Germany - Heilbronn
Tel: 49-7131-72400

Germany - Karlsruhe
Tel: 49-721-625370

Germany - Munich
Tel: 49-89-627-144-0
Fax: 49-89-627-144-44

Germany - Rosenheim
Tel: 49-8031-354-560

Israel - Ra'anana
Tel: 972-9-744-7705

Italy - Milan
Tel: 39-0331-742611
Fax: 39-0331-466781

Italy - Padova
Tel: 39-049-7625286

Netherlands - Drunen
Tel: 31-416-690399
Fax: 31-416-690340

Norway - Trondheim
Tel: 47-7288-4388

Poland - Warsaw
Tel: 48-22-3325737

Romania - Bucharest
Tel: 40-21-407-87-50

Spain - Madrid
Tel: 34-91-708-08-90
Fax: 34-91-708-08-91

Sweden - Gothenberg
Tel: 46-31-704-60-40

Sweden - Stockholm
Tel: 46-8-5090-4654

UK - Wokingham
Tel: 44-118-921-5800
Fax: 44-118-921-5820