
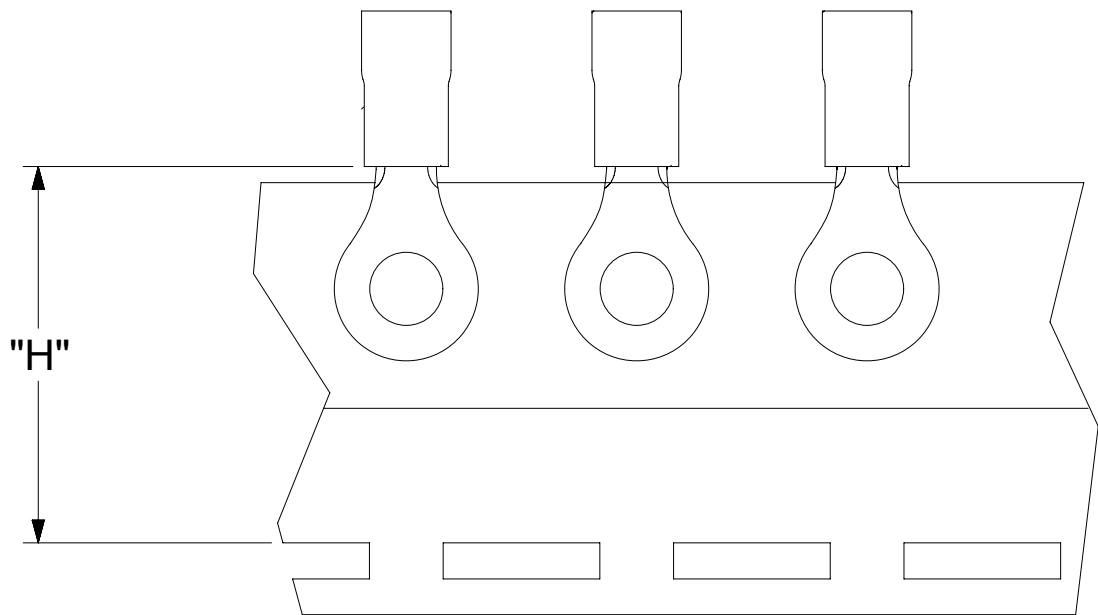


	12	11	10	9	8	7	6	5	4		3	2	1
LOOSE PIECE			SPECIFICATIONS										
	MATERIAL NUMBER	ENGINEERING NUMBER	STUD SIZE	"S" ±.005 [0.13]	"W" ±.010 [0.25]	"C" MIN.	"L" MAX.	"I.D." MIN.	"H"	STOCK ±.001 [0.025] THICKNESS			
H	190540032	A-220-04X	4	.119 [3.02]	.225 [5.71]	.157 [3.99]	.759 [19.28]	.062 [1.57]	.98 [24.89]	.028 [0.71]			
	190540033	A-220-06X	6	.146 [3.71]									
G	190540035	A-221-06X	6	.146 [3.71]	.312 [7.92]	.270 [6.86]	.946 [23.26]	.062 [1.57]	.98 [24.89]	.028 [0.71]			
	190540037	A-221-08X	8	.173 [4.39]									
	190540039	A-221-10X	10	.198 [5.03]									
	190540042	A-222-14X	14	.265 [6.73]	.467 [11.86]	.386 [9.80]	1.110 [28.19]	.062 [1.57]	.98 [24.89]	.028 [0.71]			
	190540044	A-222-56X	56	.328 [8.33]									
F	190540048	A-226-38X	38	.390 [9.91]	.534 [13.56]	.552 [14.02]	1.309 [33.25]	.054 [1.37]	1.172 [29.77]	.031 [0.79]			
	190540051	A-232-04X	4	.119 [3.02]	.254 [6.45]	.240 [6.10]	.857 [21.77]	.062 [1.57]	.98 [24.89]	.028 [0.71]			
	190540052	A-232-06X	6	.146 [3.71]									
	190540054	A-232-08X	8	.173 [4.39]									

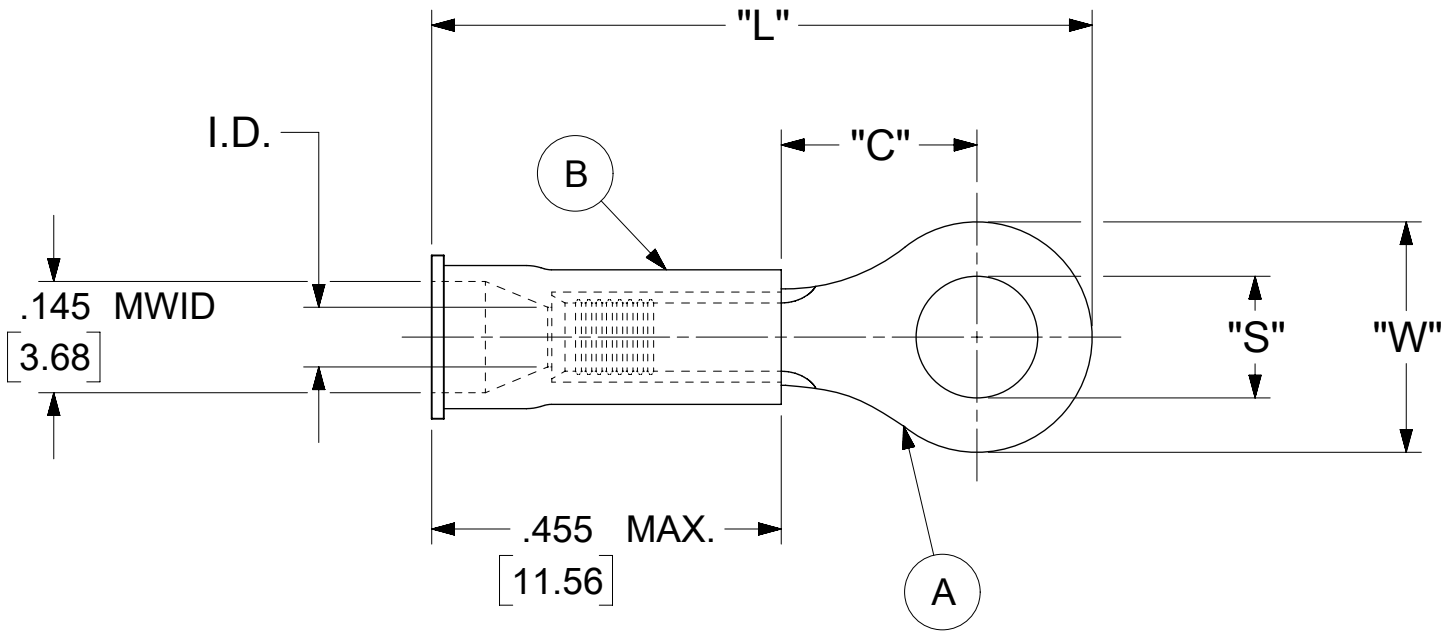

NOTES:

- MATERIAL:
(A). RING TONGUE TERMINAL: COPPER
PLATING: ELECTRO-TIN (.0003 MIN.)
(B). INSULATION: MOLDED PVC (RED)
- MWID: MAXIMUM WIRE INSULATION DIAMETER
- WIRE SIZE: 22 -18 AWG
.25 -1.5 MM²
- ALL DIMENSIONS IN INCHES/[MM].
- PARTS ARE ROHS COMPLIANT.
- DIMS. SHOWN ARE FOR REFERENCE ONLY.