
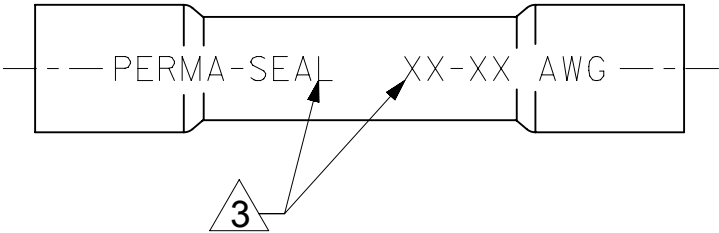
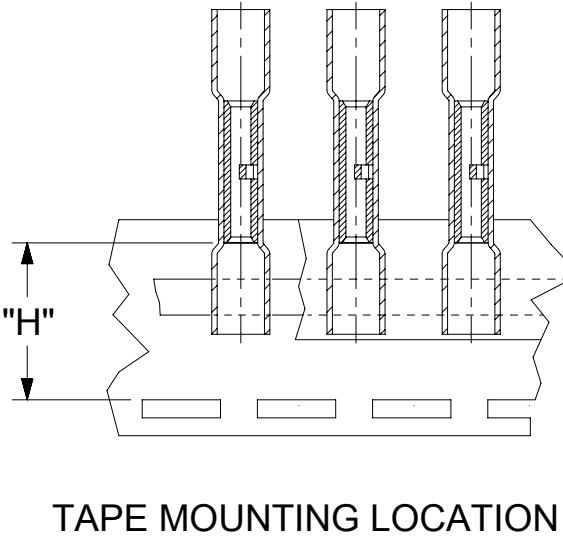


10	9		8	7	6	5	4	3	2	1
MAT'L NO.	ENG NO.	MAT'L NO. TAPE MOUNT	ENG NO. TAPE MOUNT	PERMA-SEAL COLOR	WIRE AWG	Ø"A" MIN	Ø"B" MAX	"C" REF	"H" ± .020 (0.51)	Ø"D" MIN
191640013	SAA-22-18	191640014	SAA-22-18T	SAA-22-18T	22 - 18	.185 (4.70)	.280 (7.11)	1.50 (38.1)	.767 (19.48)	.059 (1.50)
191640044	SBB-16-14	191640045	SBB-16-14T	SBB-16-14T	16 - 14	.195 (4.95)	.308 (7.82)	1.50 (38.1)	.765 (19.43)	.091 (2.31)
191640056	SC-12-10	191640057	SC-12-10T	SC-12-10T	12 - 10	.275 (6.99)	.383 (9.73)	1.75 (44.5)	.800 (23.32)	.139 (3.53)
191640079	SD-354	----	----	----	8	.300 (7.62)	.448 (11.38)	2.00 (50.8)	----	.165 (4.19)

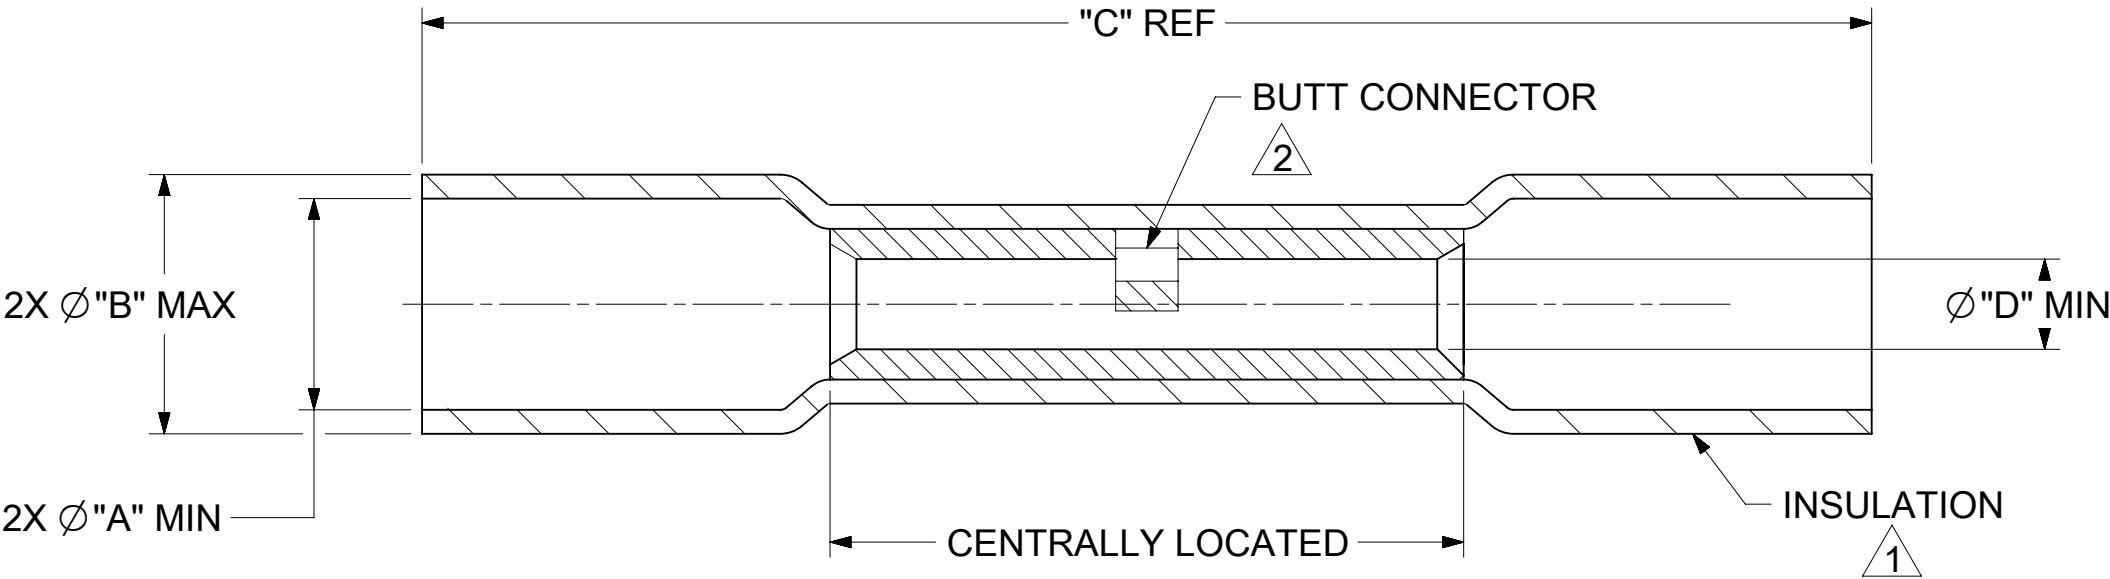

NOTE(S):

- 1 INSULATION MATERIAL: HEAT SHRINKABLE TUBING WITH HOTMELT INNER LINER. (SEE CHART FOR COLOR).
- 2 SEAMLESS TIN PLATED COPPER TERMINAL.
- 3 PRINTED TEXT IN BLACK APPROX. .12(3.0) HIGH
- 4. PARTS ARE RoHS COMPLIANT.

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION													
	DIMENSION UNITS		SCALE		CURRENT REV DESC: "C" WAS MAX				molex					
	INCH/MM		NTS											
	GENERAL TOLERANCES (UNLESS SPECIFIED)								EC NO: 790060 DRWN: DEANNM1 CHK'D: ETHRODAHL APPR: ETHRODAHL				PERMA-SEAL NIAC BUTT CONNECTORS	
		MM	INCH											
DIVISIONAL SYMBOLS	F = 0					2024/06/04				PRODUCT CUSTOMER DRAWING				
	F = 0													
	P = 0					2024/06/21								
	4 PLACES		±	±										
	3 PLACES		±	±										
2 PLACES		±	±	2024/06/21										
1 PLACE		±	±											
0 PLACES		±	±	INITIAL REVISION: DRWN: BENDERLE APPR: RDEROSS										
ANGULAR TOL		±	°					2002/04/02 2002/04/03						
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING						SERIES		DOCUMENT NUMBER
						B-SIZE		19164		SD-19164-017		PSD	001	G
										MATERIAL NUMBER		CUSTOMER		SHEET NUMBER
										SEE CHART		GENERAL MARKET		1 OF 1