

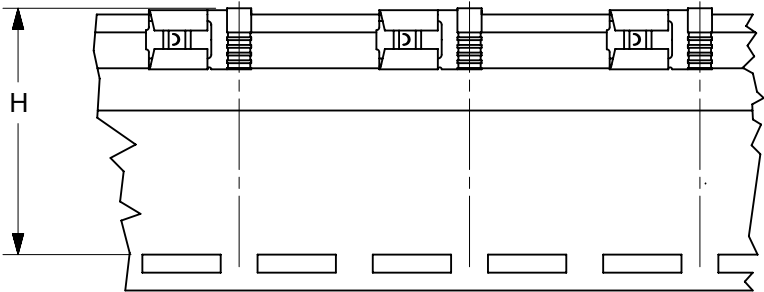
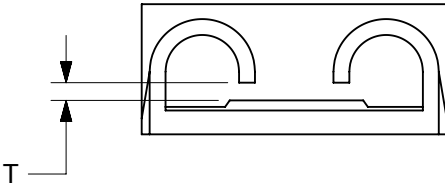


10	9		8		7		6			5	
MATERIAL NUMBER LOOSE PIECE	MATERIAL NUMBER TAPE MOUNTED	WIRE RANGE AWG	T MAX	B MAX	F MAX	L MAX	E MAX	D1 MIN	D MAX	H NOMINAL	
192030375	192030525	16-14	.036/.90	.302/7.66	.331/8.40	.587/14.92	.311/7.90	.083/2.10	.134/3.40	1.255/31.88	
192030380	-	12-10	.036/.90	.302/7.66	.331/8.40	.619/15.72	.378/9.60	.149/3.78	.193/4.90	-	

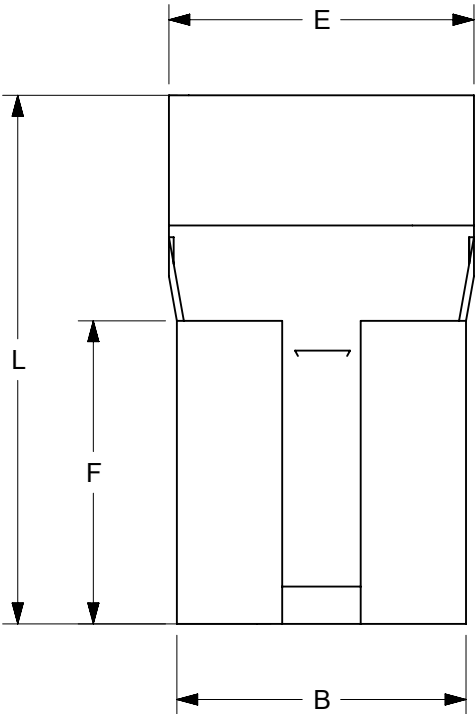

PARTS ON TAPE

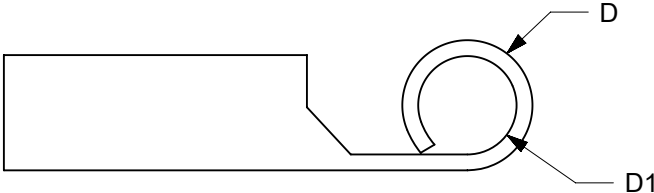

- NOTES:
1. MATERIAL: STEEL. 016/0.40 THICK REF
 2. PLATING: NICKEL PLATED WITH OPTIONAL COPPER FLASH UNDERPLATING, IS ALLOWED FOR IMPROVED ADHESION.
 3. WIRE RANGE: SEE CHART
 4. PART IS ROHS COMPLIANT.
 5. AMBIENT OPERATING TEMPERATURE UP TO 900 °F (483 °C).
 6. PART IS ROHS COMPLIANT.

D1

DOCUMENT STATUS	P1	RELEASE DATE	2022/06/02	15:20:37
-----------------	----	--------------	------------	----------

FORMAT: Eng-legal-master-lb-prod-B
REVISION: E1
DATE: 2021/05/01

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																	
	DIMENSION UNITS		SCALE		CURRENT REV DESC: REMASTERED IN ECTR AND UPDATED NOTE				molex									
	IN/MM		NTS															
	GENERAL TOLERANCES (UNLESS SPECIFIED)																	
			MM		INCH		FLAG QD TERMINAL, STEEL, KRIMPTITE, 900 DEG F (483 DEG C)											
	4 PLACES		±		±													
	3 PLACES		±		±													
	2 PLACES		±		±													
	1 PLACE		±		±													
	DIVISIONAL SYMBOLS	0 PLACES		±		±		PRODUCT CUSTOMER DRAWING										
ANGULAR TOL		±		°														
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES		DOCUMENT NUMBER		DOC TYPE		DOC PART		REVISION		
						B-SIZE		19203		SD-19203-024		PSD		001		D1		
										SEE CHART		GENERAL MARKET		SHEET NUMBER				