



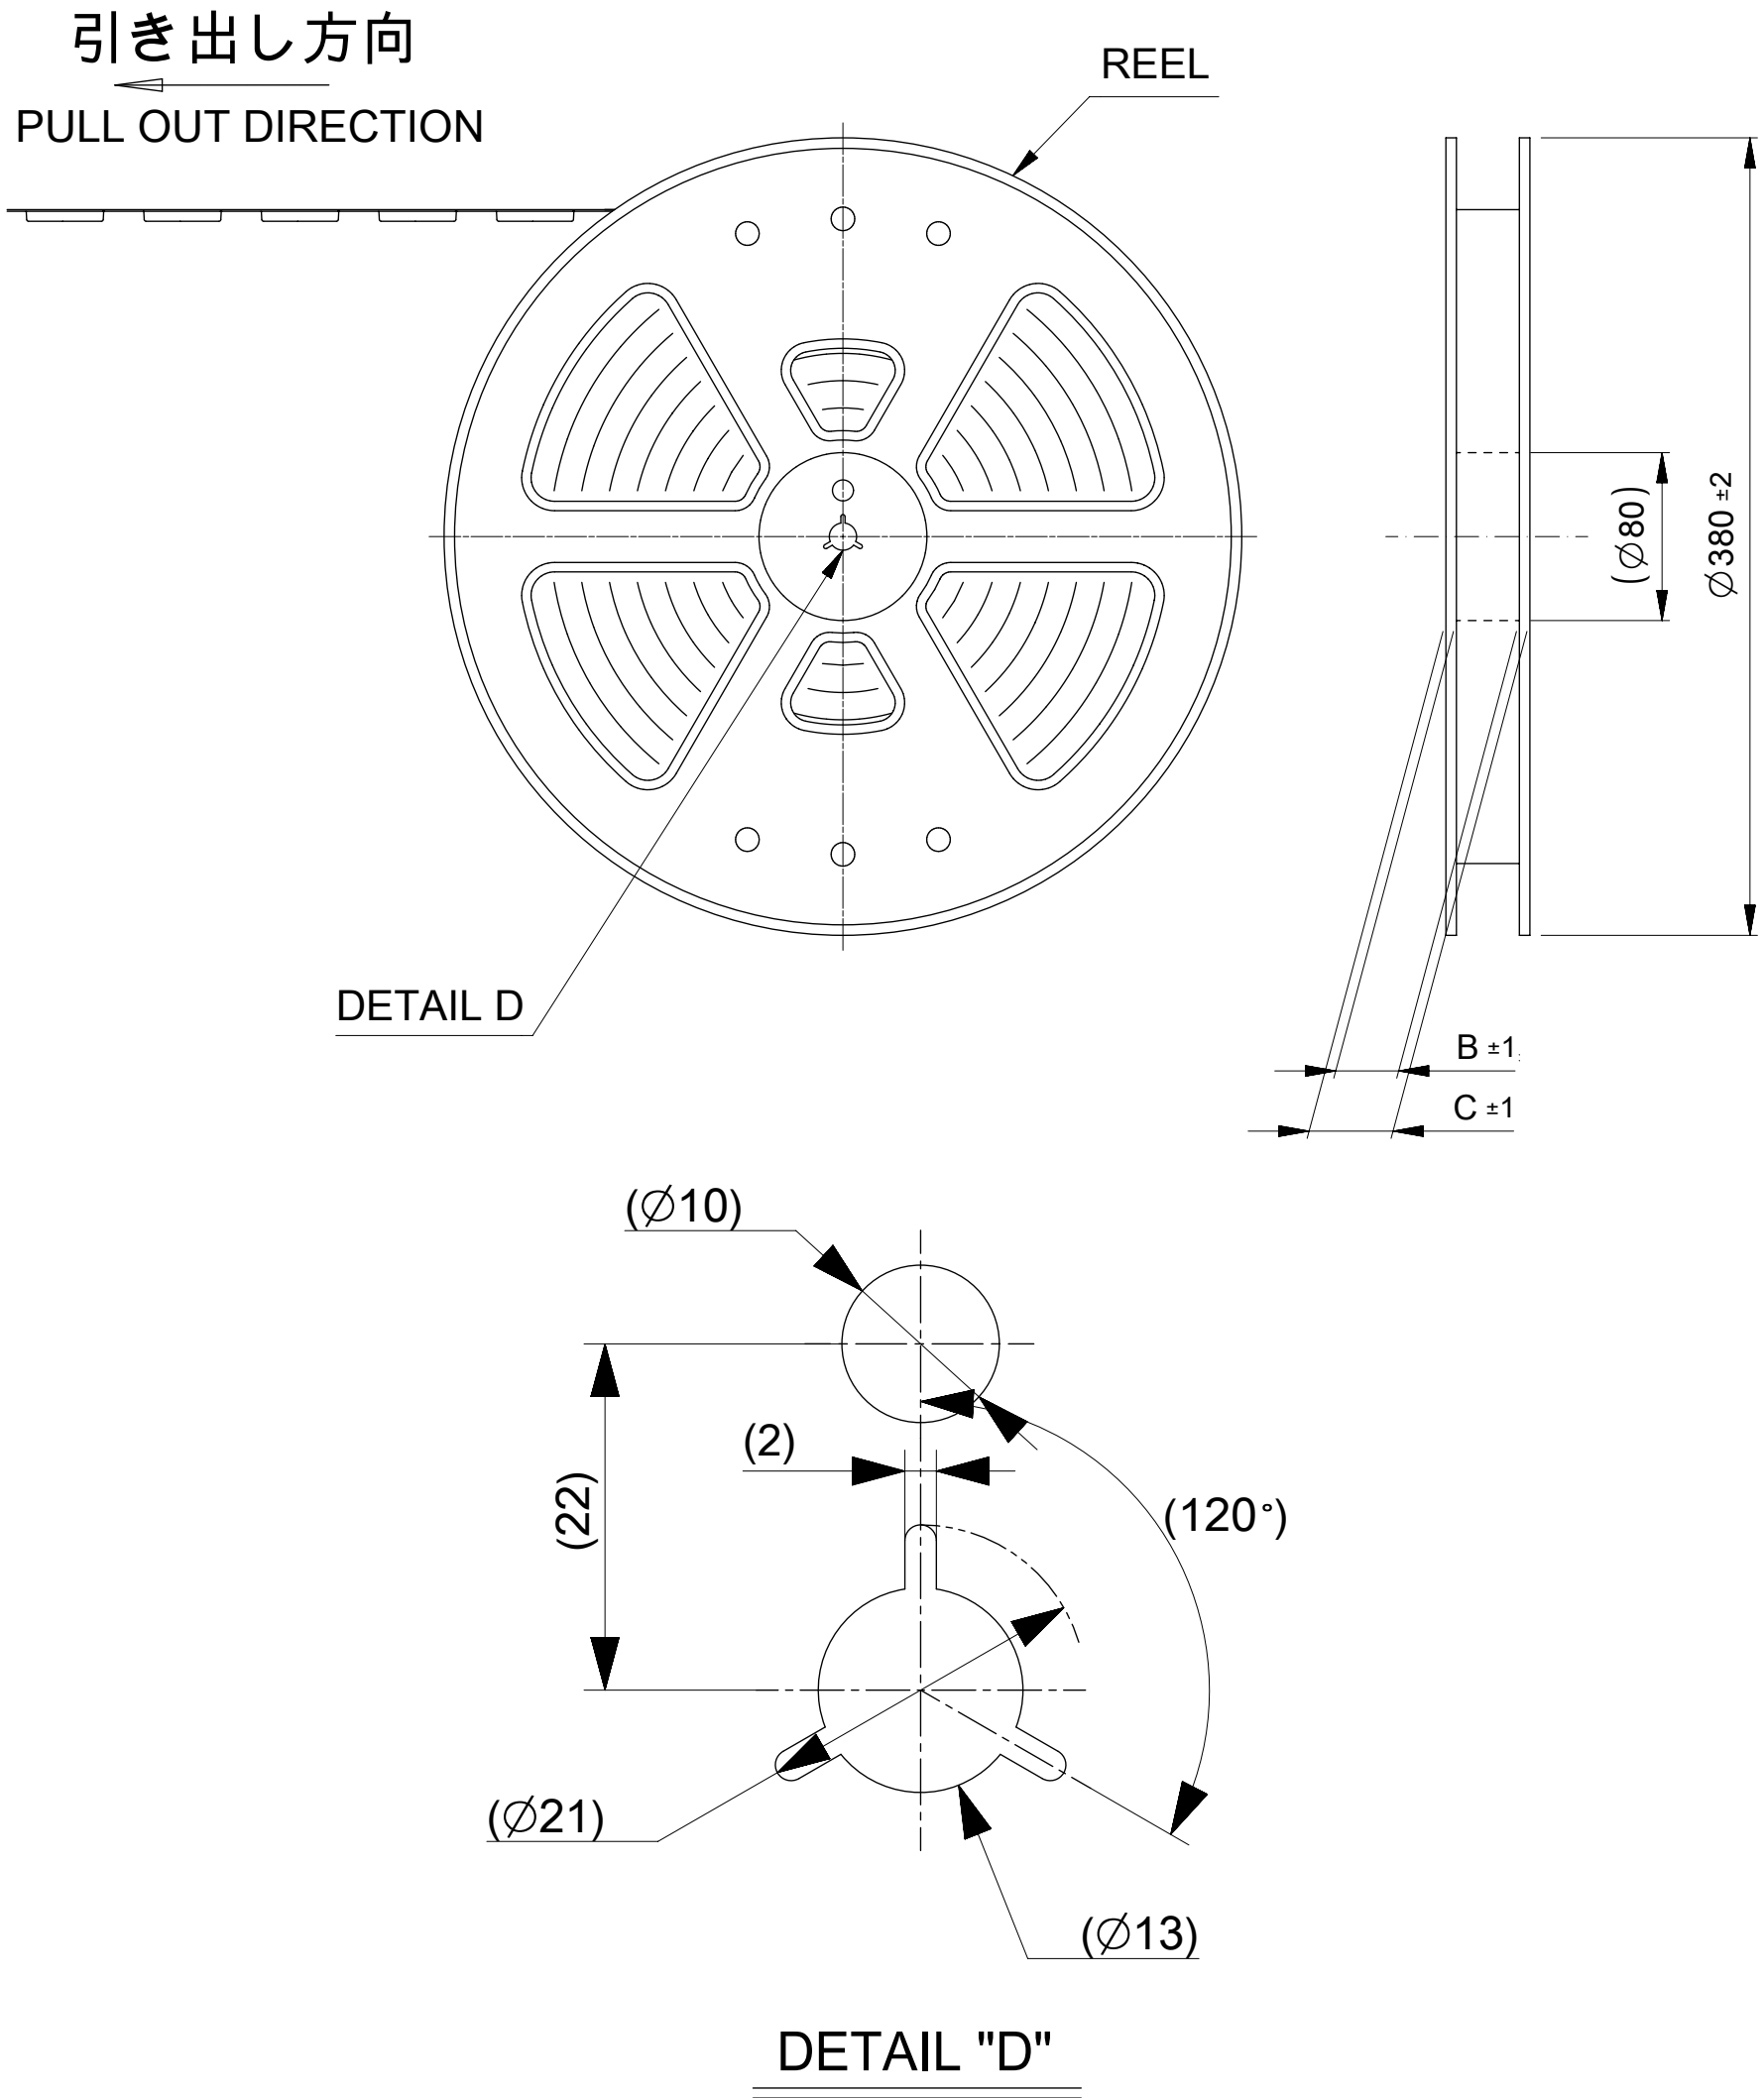

注記 NOTES

1. 製品詳細寸法については製品単体図面を参照下さい。
FOR DETAILED DIMENSION, SEE PRODUCT DRAWING.
2. 梱包数量：1200個/リール
THE NUMBER OF PACKAGED CONNECTORS：1200 PCS/REEL
3. リードテープ長さ
LEAD TAPE LENGTH
- 引き出し方向
PULL OUT DIRECTION
- 20PCS. MIN. 空ポケット部
EMPTY PART
- トップテープリーダー部
TOP TAPE LEADER PART
400MIN.
- 部品挿入部
COMPONENT
SUPPLIER
- 末端部(空部)
TAIL PART
(EMPTY)
160 MIN.
4. 材料
MATERIAL
キャリアテープ：ポリプロピレン(PP)
CARRIER TAPE：POLYPROPYLENE (PP)
トップテープ：PET, PE, PEF
TOP TAPE：PET, PE, PEF
リール：ポリスチレン(PS) <リサイクル材含む>
REEL：POLYSTYRENE (PS) <RECYCLE MATERIAL CONTAINED>
5. トップテープの剥離強度については IEC60286-3 に準拠。
TOP TAPE PEEL FORCE IS DEFINED BY IEC60286-3.

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION												
FUNCTIONAL SYMBOLS		DIMENSION UNITS		SCALE		CURRENT REV DESC:			molex 0.8 MM PITCH B-TO-B CONN. PLUG (WITHOUT BOSS) EMBOSS TAPE PACKAGE			
F A = 0	mm	NTS		EC NO: 751506 DRWN: RSATO 2023/04/19 CHK'D: SMARUYAMA 2023/06/27 APPR: YNAITO 2023/06/27 INITIAL REVISION: DRWN: RMIYAMOTO 2018/07/31 APPR: TKUSUHARA01 2018/08/17								
F C = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)											
F P = 0	ANGULAR TOL ± °											
DIVISIONAL SYMBOLS	4 PLACES	±										
	3 PLACES	±										
	2 PLACES	±										
	1 PLACE	±										
	0 PLACES	±		DOCUMENT NUMBER			DOC TYPE	DOC PART	REVISION			
				533090000			PSD	004	D			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING	SERIES	MATERIAL NUMBER		CUSTOMER	SHEET NUMBER	
						A2-SIZE	53309	SEE CHART		GENERAL	1 OF 2	

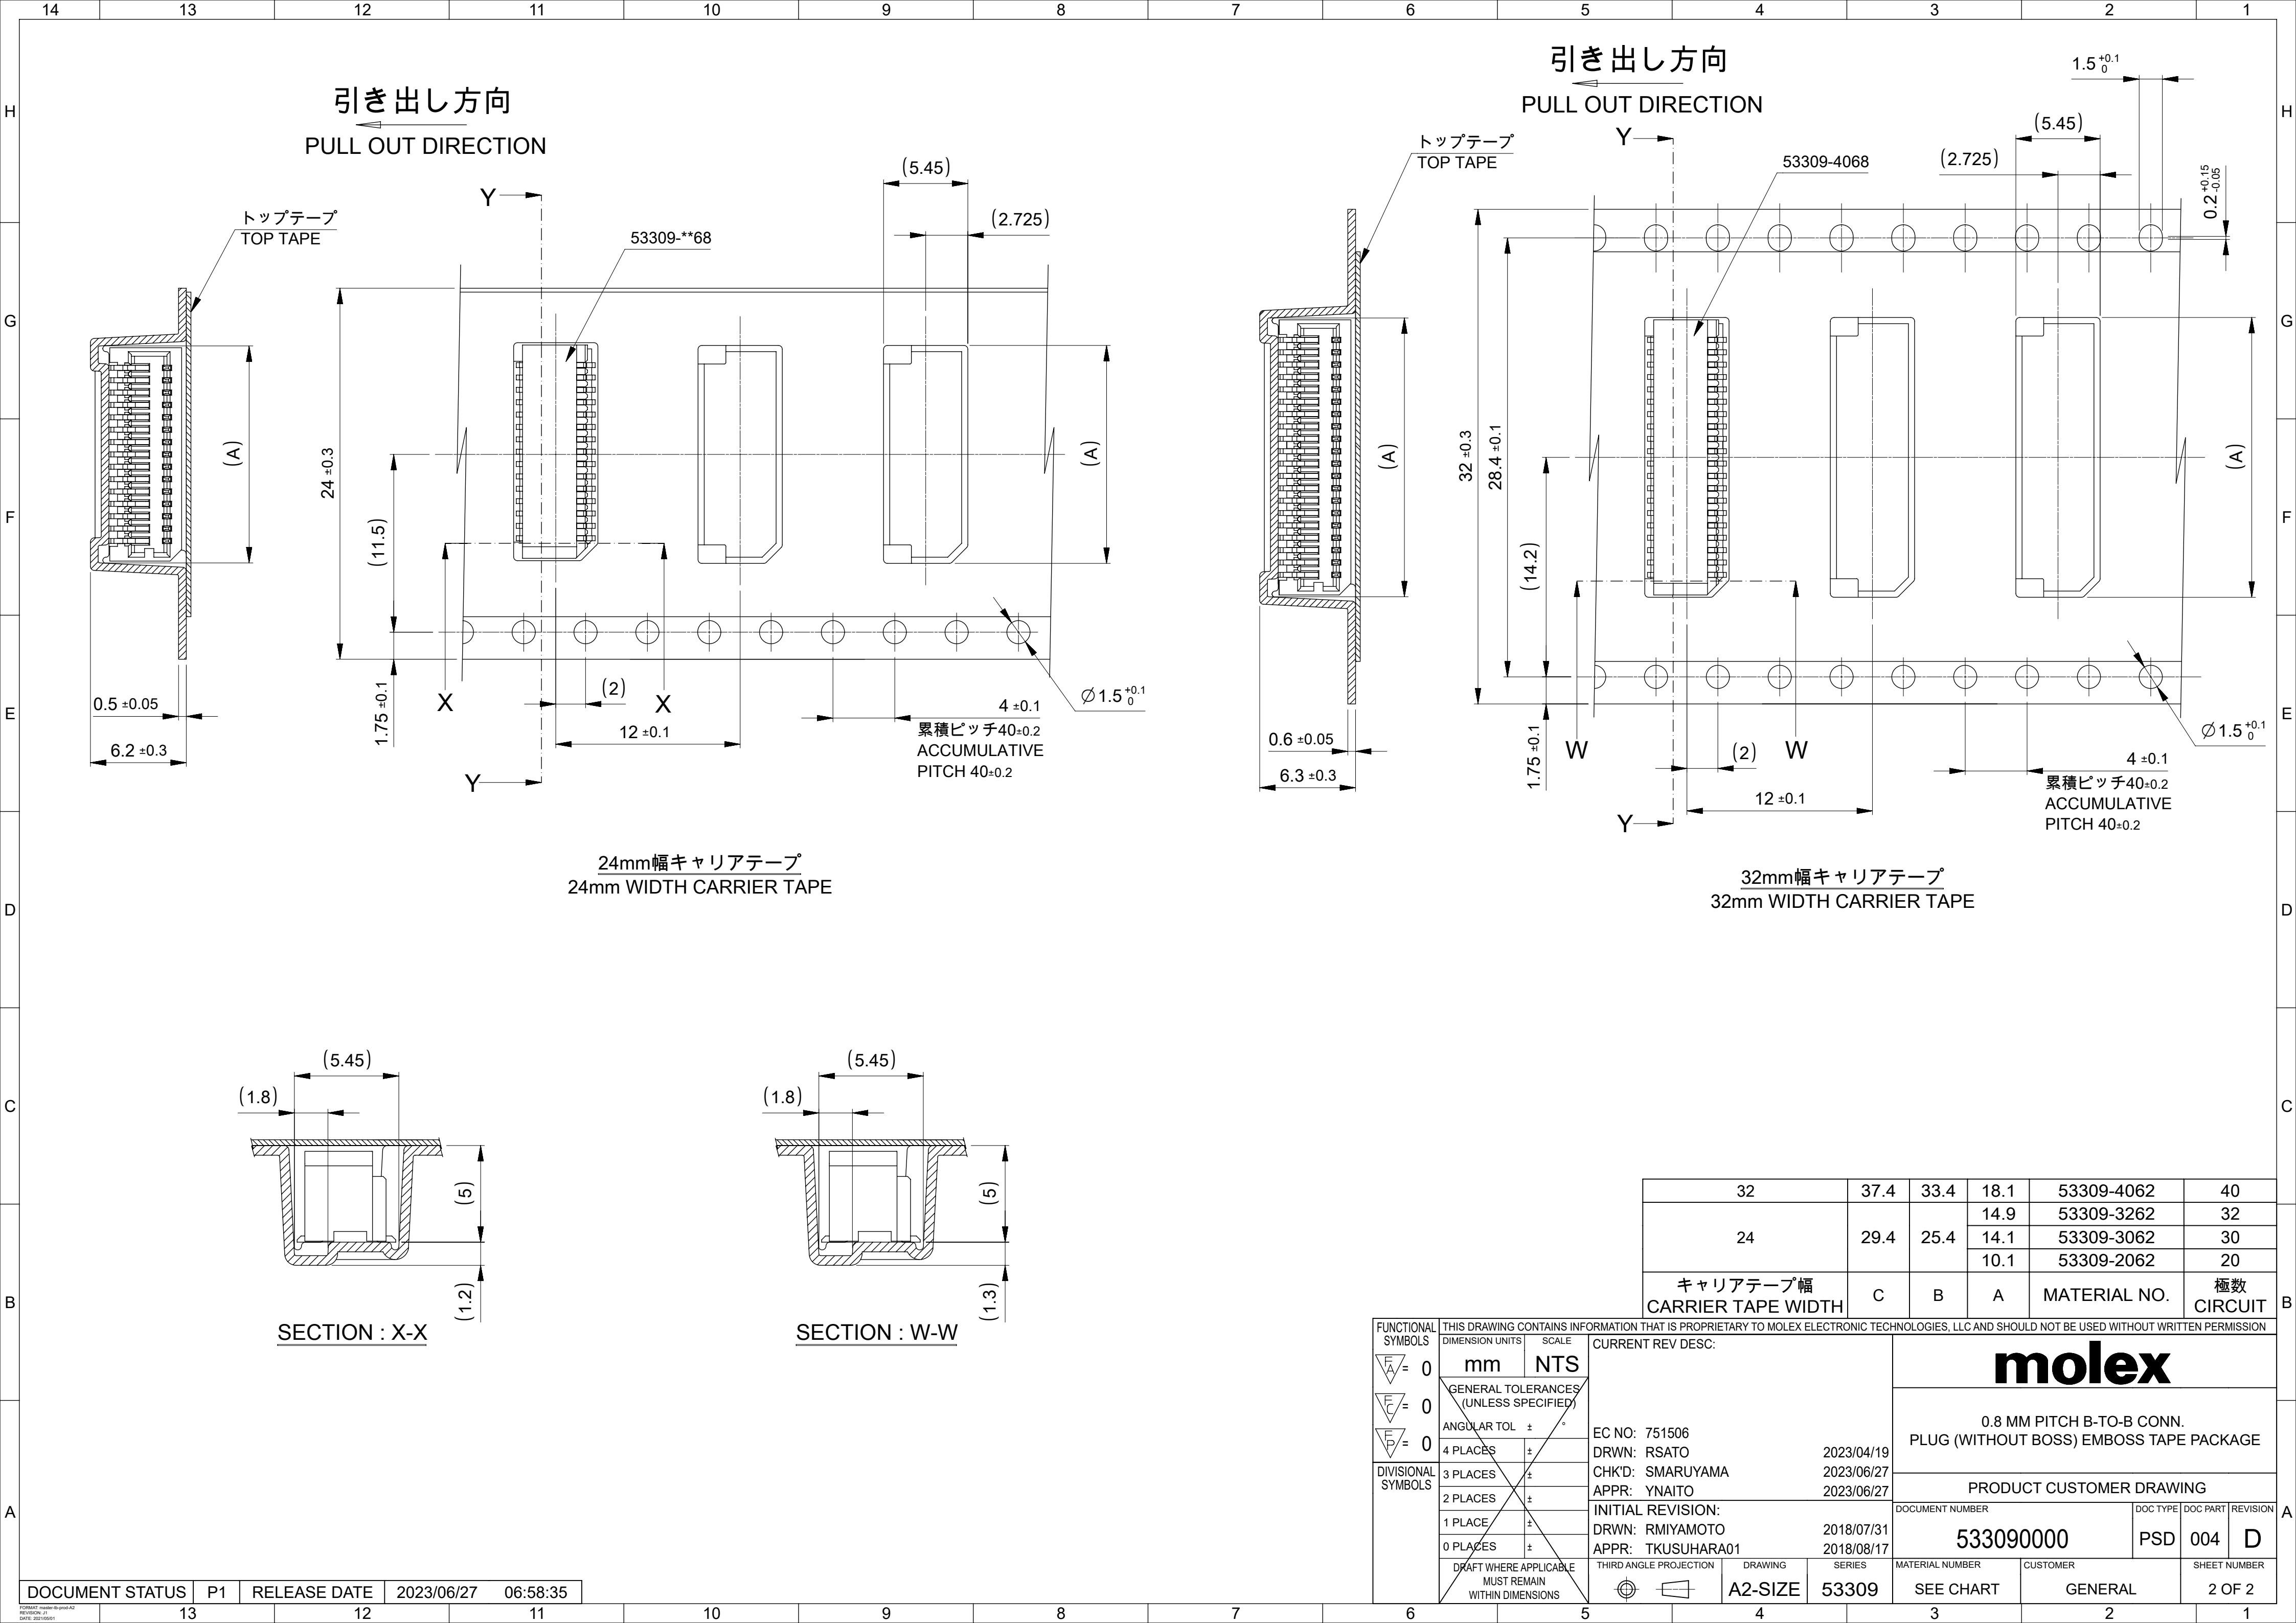






32	37.4	33.4	18.1	53309-4062	40
24	29.4	25.4	14.9	53309-3262	32
			14.1	53309-3062	30
			10.1	53309-2062	20
キャリアテープ幅 CARRIER TAPE WIDTH	C	B	A	MATERIAL NO.	極数 CIRCUIT

FUNCTIONAL SYMBOLS $\frac{F}{A}=0$ $\frac{F}{C}=0$ $\frac{F}{P}=0$ DIVISIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC:			
	DIMENSION UNITS	SCALE				
	mm	NTS				
	GENERAL TOLERANCES (UNLESS SPECIFIED)					
	ANGULAR TOL	± °				
	4 PLACES	±				
DIVISIONAL SYMBOLS	3 PLACES	±				
	2 PLACES	±				
	1 PLACE	±				
	0 PLACES	±				
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER
			A2-SIZE	53309	SEE CHART	GENERAL

molex			
0.8 MM PITCH B-TO-B CONN. PLUG (WITHOUT BOSS) EMBOSS TAPE PACKAGE			
PRODUCT CUSTOMER DRAWING			
DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
533090000	PSD	004	D

DOCUMENT STATUS	P1	RELEASE DATE	2023/06/27	06:58:35
-----------------	----	--------------	------------	----------


FORMATS: master (B-PROD-A2)
REVISION: J1
DATE: 2023/06/27

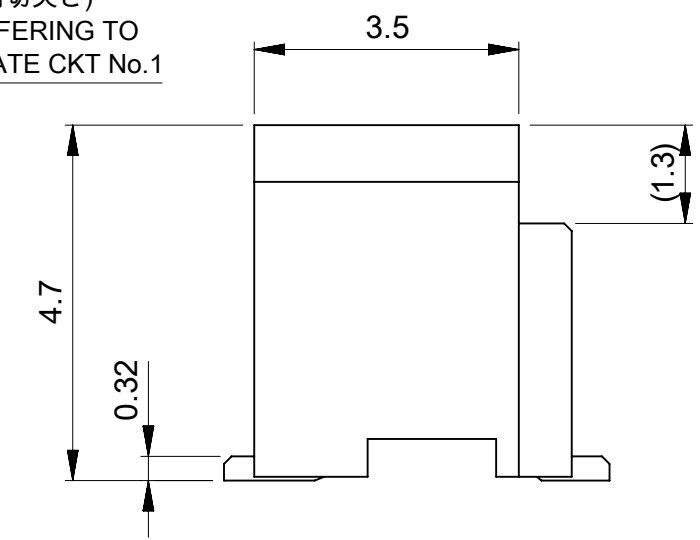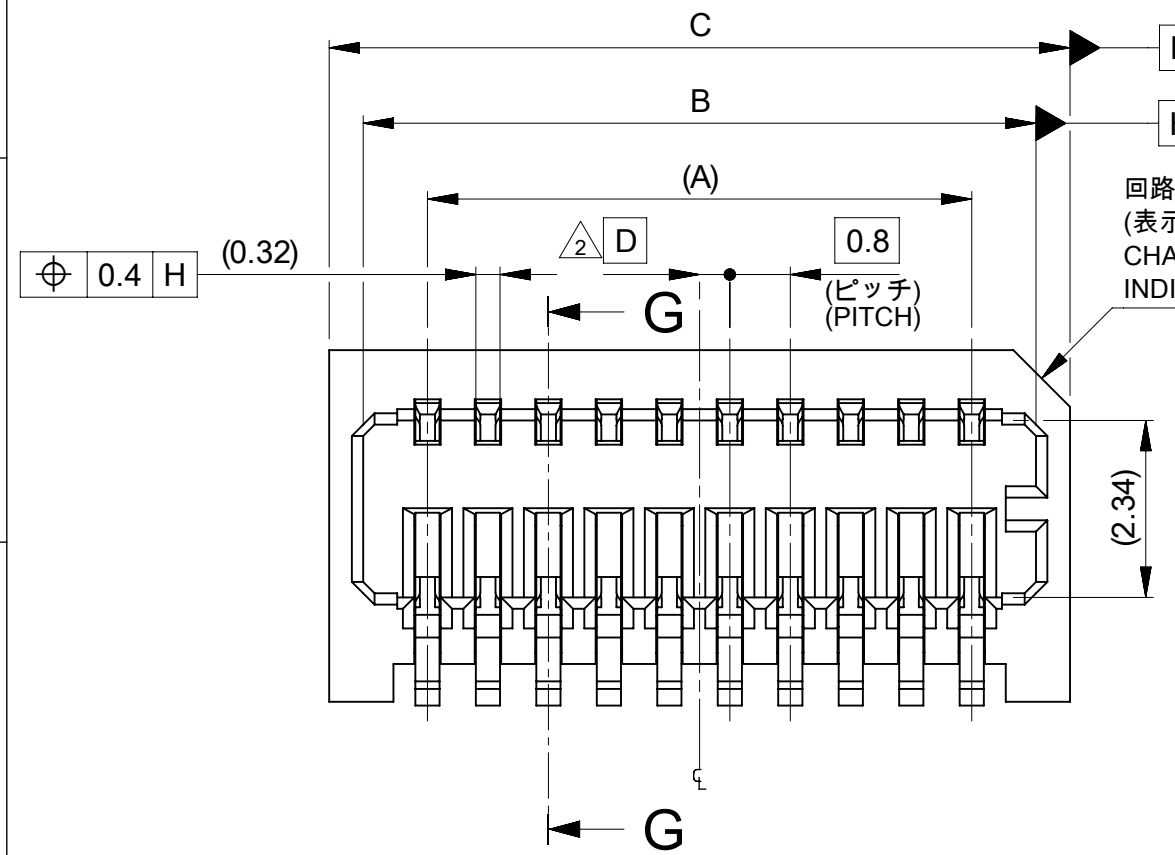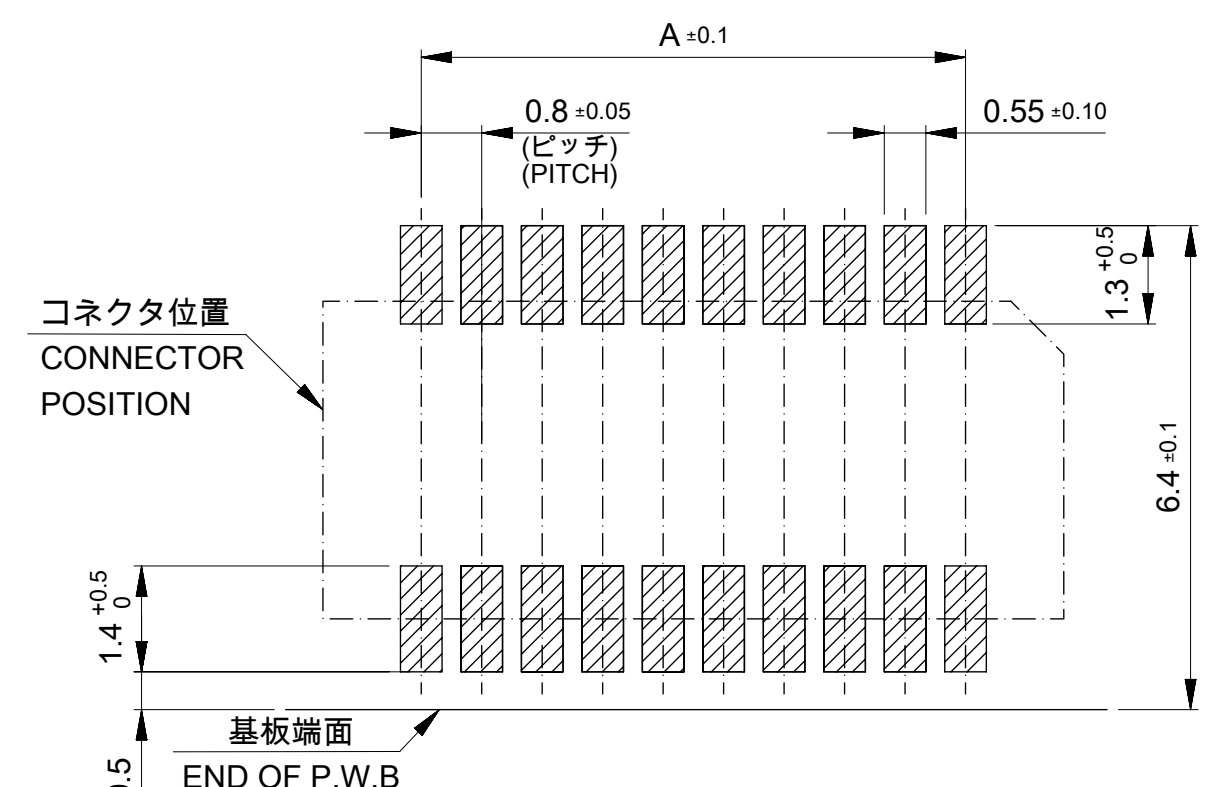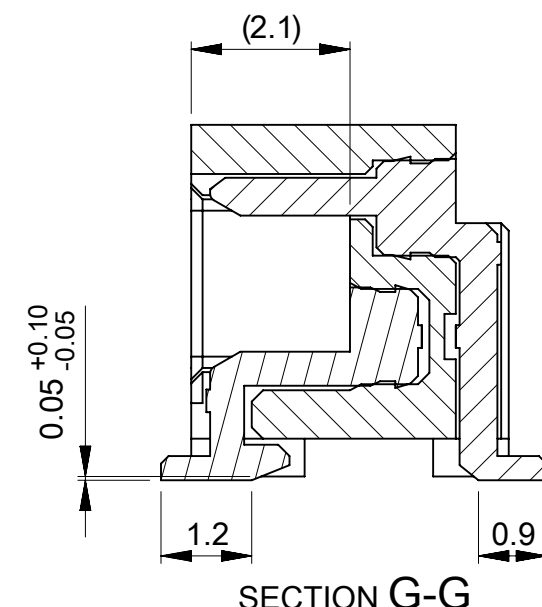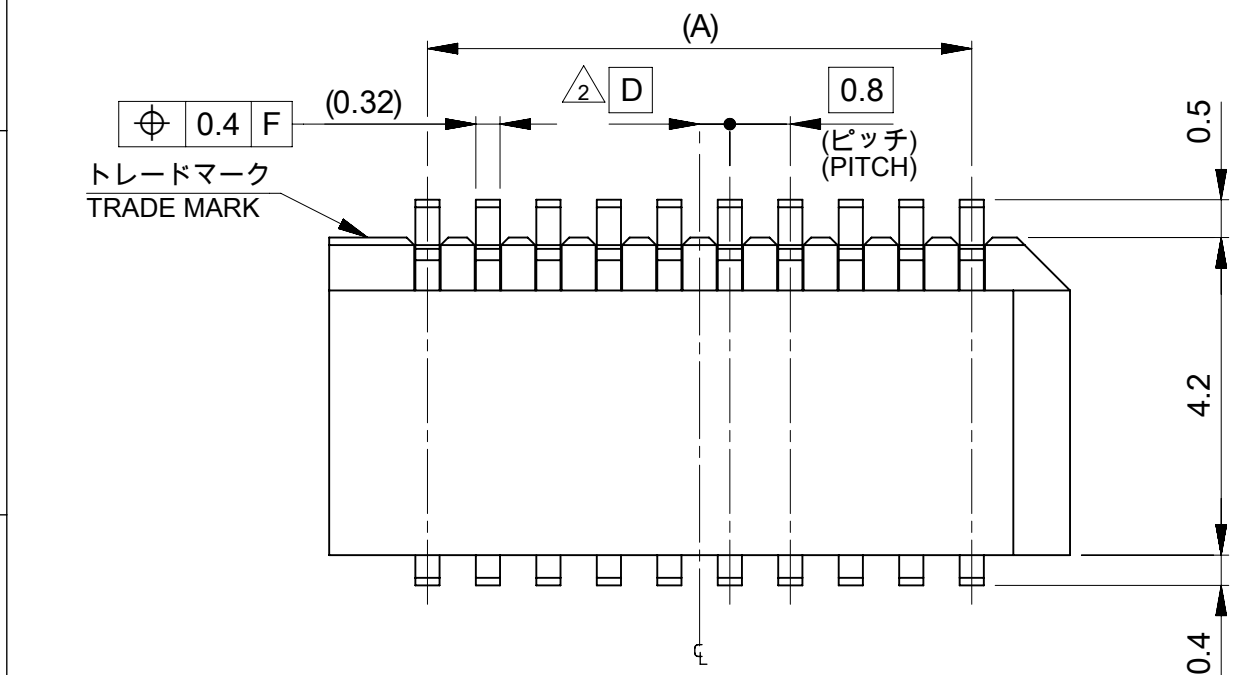

参考基板レイアウト (マウント面)
P.W.B PATTERN LAYOUT (REF.) (MOUNT AREA)

0.4	17.8	16.9	15.2	53309-4062	40
0.4	14.6	13.7	12.0	53309-3262	32
0.8	13.8	12.9	11.2	53309-3062	30
0.4	9.8	8.9	7.2	53309-2062	20
D	C	B	A	EMBOSSSED TAPE PACKAGE	極数
				ORDER NO	CIRCUIT

FUNCTIONAL SYMBOLS FA = 0 FE = 0 FE = 0 DIVISIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	CURRENT REV DESC:		molex			
	DIMENSION UNITS: mm	SCALE: 10:1	GENERAL TOLERANCES (UNLESS SPECIFIED)				
	ANGULAR TOL ± 3.0 °	4 PLACES ± 0.2	EC NO: 751506 DRWN: RSATO CHK'D: SMARUYAMA APPR: YNAITO		2023/04/19 2023/06/27 2023/06/27		
	3 PLACES ± 0.2	2 PLACES ± 0.2	INITIAL REVISION:		DOCUMENT NUMBER		
	1 PLACE ± 0.2	0 PLACES ± 0.2	DRWN: TARAI01 APPR: TKUSUHARA01		533091000		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
			A3-SIZE	53309	SEE CHART	GENERAL	1 OF 2

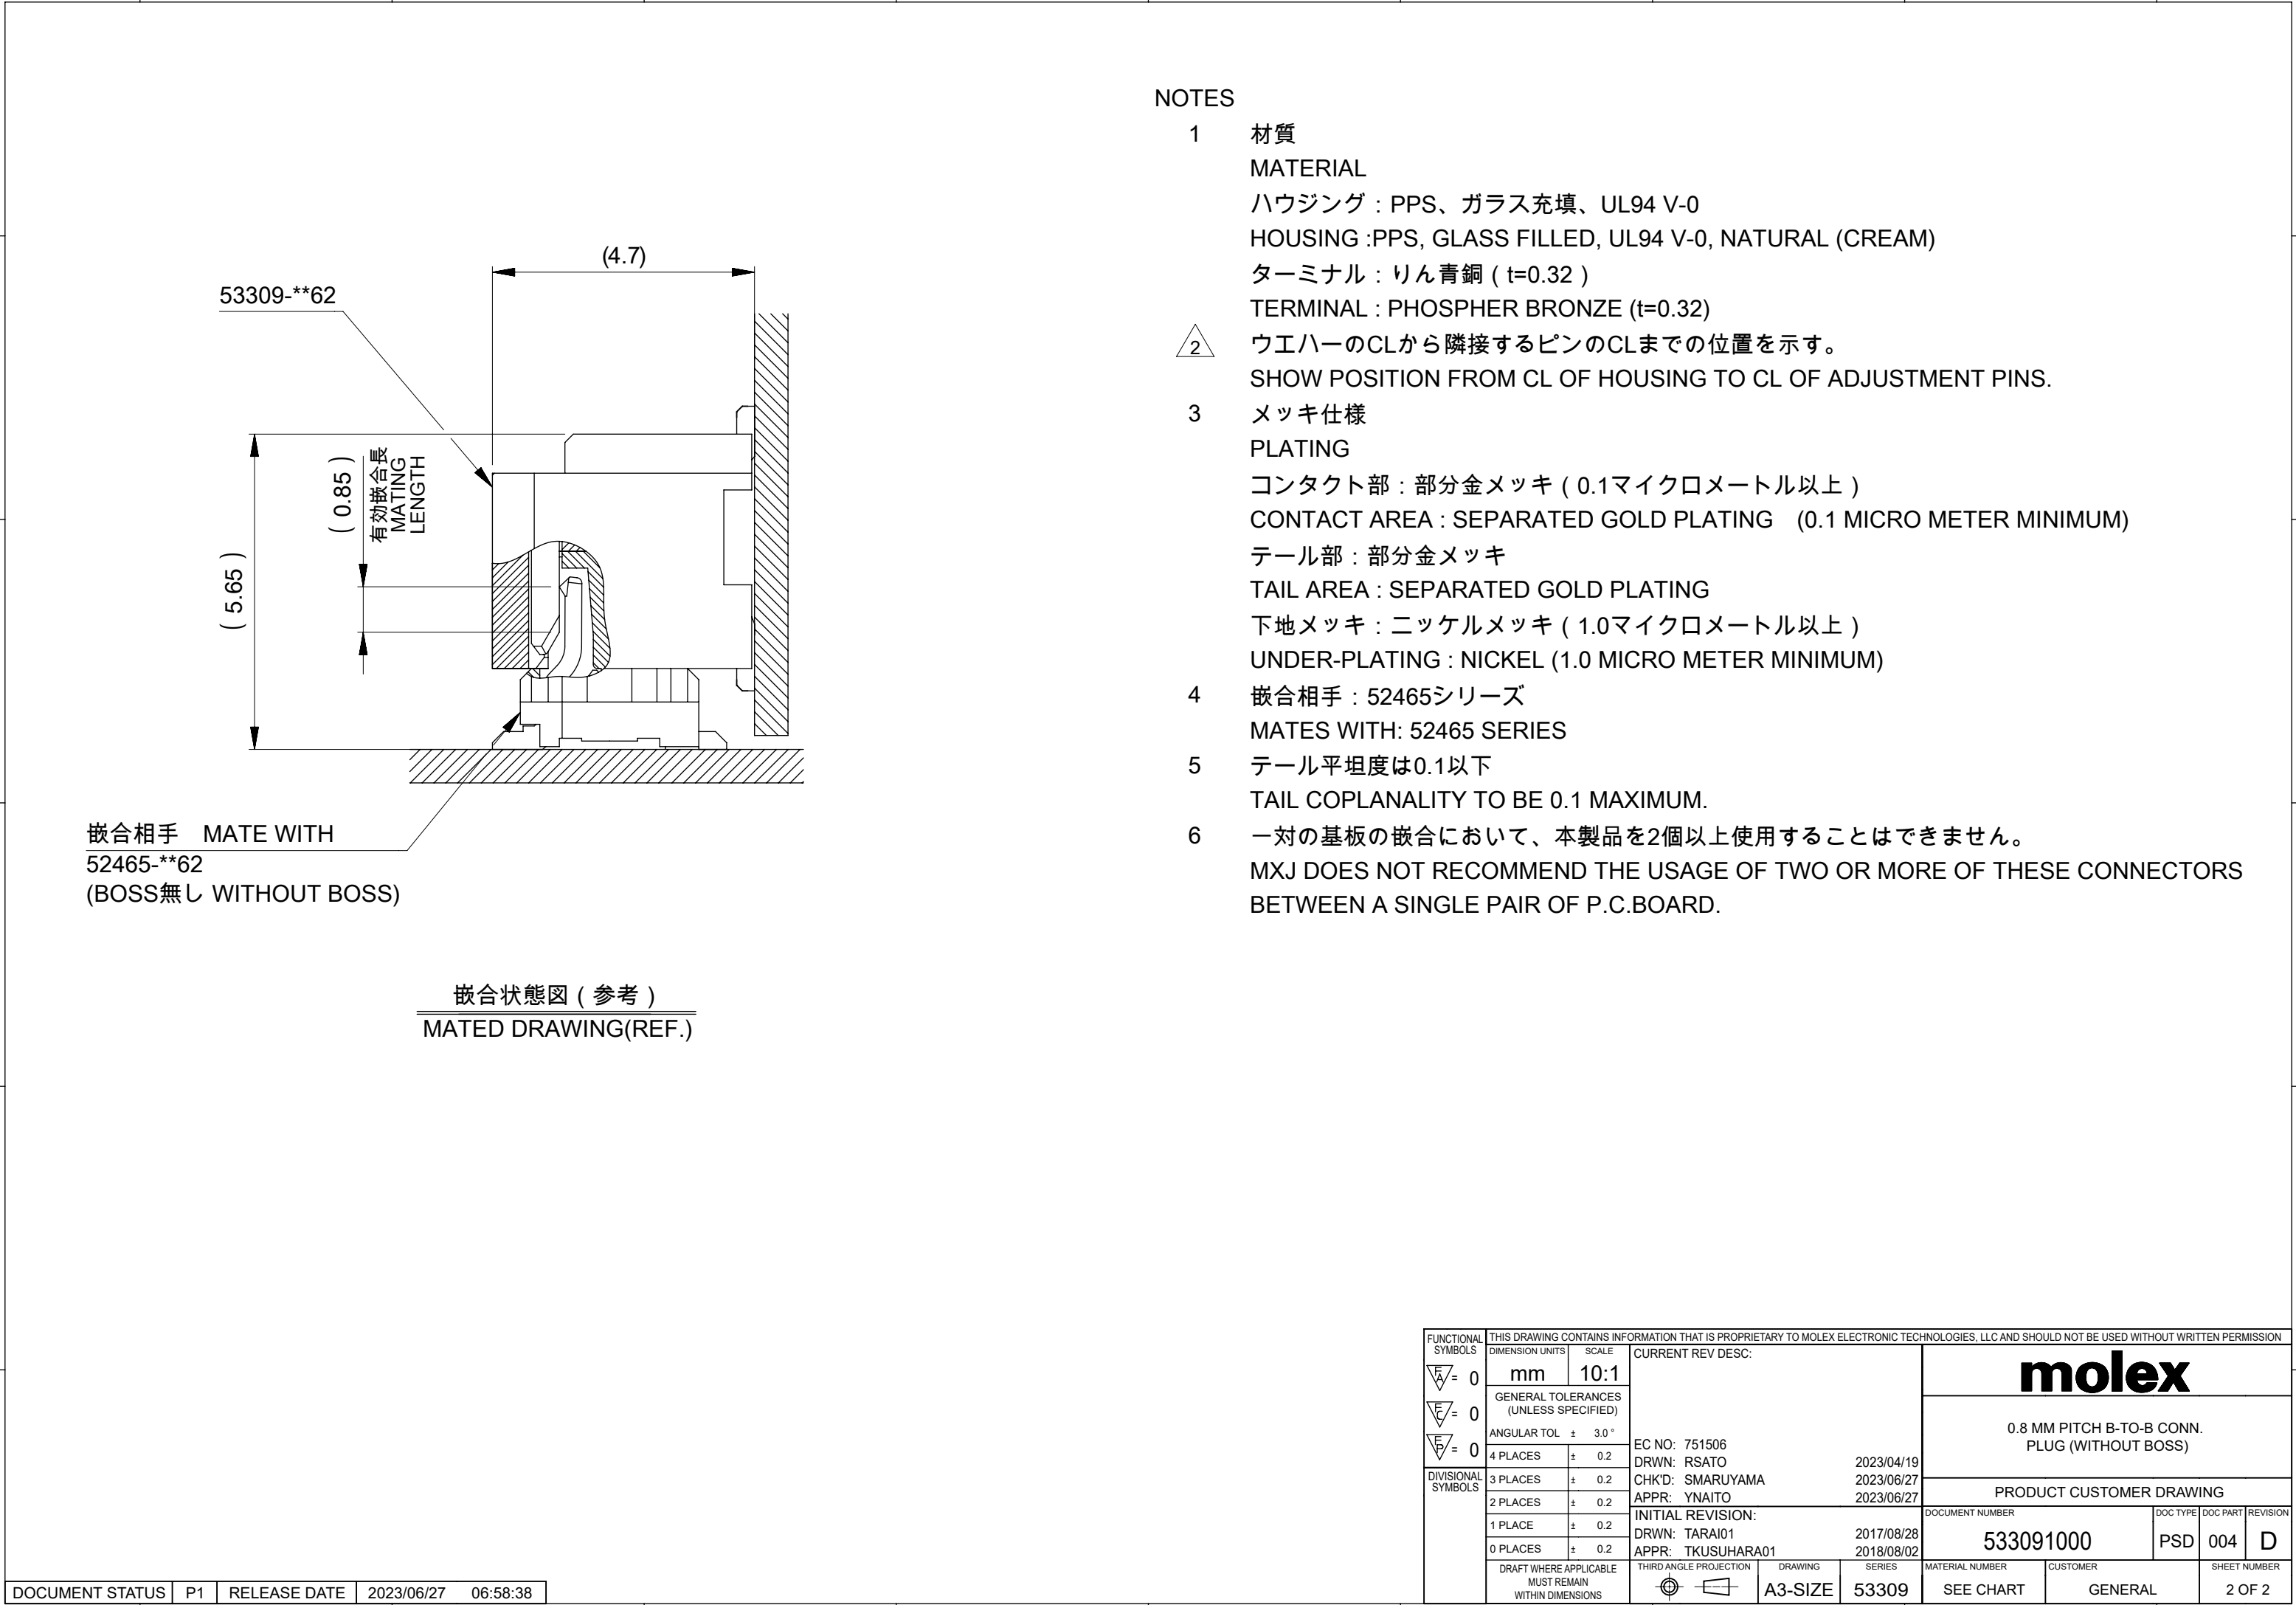

NOTES

- 1 材質
MATERIAL
ハウジング : PPS、ガラス充填、UL94 V-0
HOUSING :PPS, GLASS FILLED, UL94 V-0, NATURAL (CREAM)
ターミナル : りん青銅 (t=0.32)
TERMINAL : PHOSPHER BRONZE (t=0.32)
- 2 △
ウエハーのCLから隣接するピンのCLまでの位置を示す。
SHOW POSITION FROM CL OF HOUSING TO CL OF ADJUSTMENT PINS.
- 3
メッキ仕様
PLATING
コンタクト部 : 部分金メッキ (0.1マイクロメートル以上)
CONTACT AREA : SEPARATED GOLD PLATING (0.1 MICRO METER MINIMUM)
テール部 : 部分金メッキ
TAIL AREA : SEPARATED GOLD PLATING
下地メッキ : ニッケルメッキ (1.0マイクロメートル以上)
UNDER-PLATING : NICKEL (1.0 MICRO METER MINIMUM)
- 4
嵌合相手 : 52465シリーズ
MATES WITH: 52465 SERIES
- 5
テール平坦度は0.1以下
TAIL COPLANALITY TO BE 0.1 MAXIMUM.
- 6
一対の基板の嵌合において、本製品を2個以上使用することはできません。
MXJ DOES NOT RECOMMEND THE USAGE OF TWO OR MORE OF THESE CONNECTORS BETWEEN A SINGLE PAIR OF P.C.BOARD.