

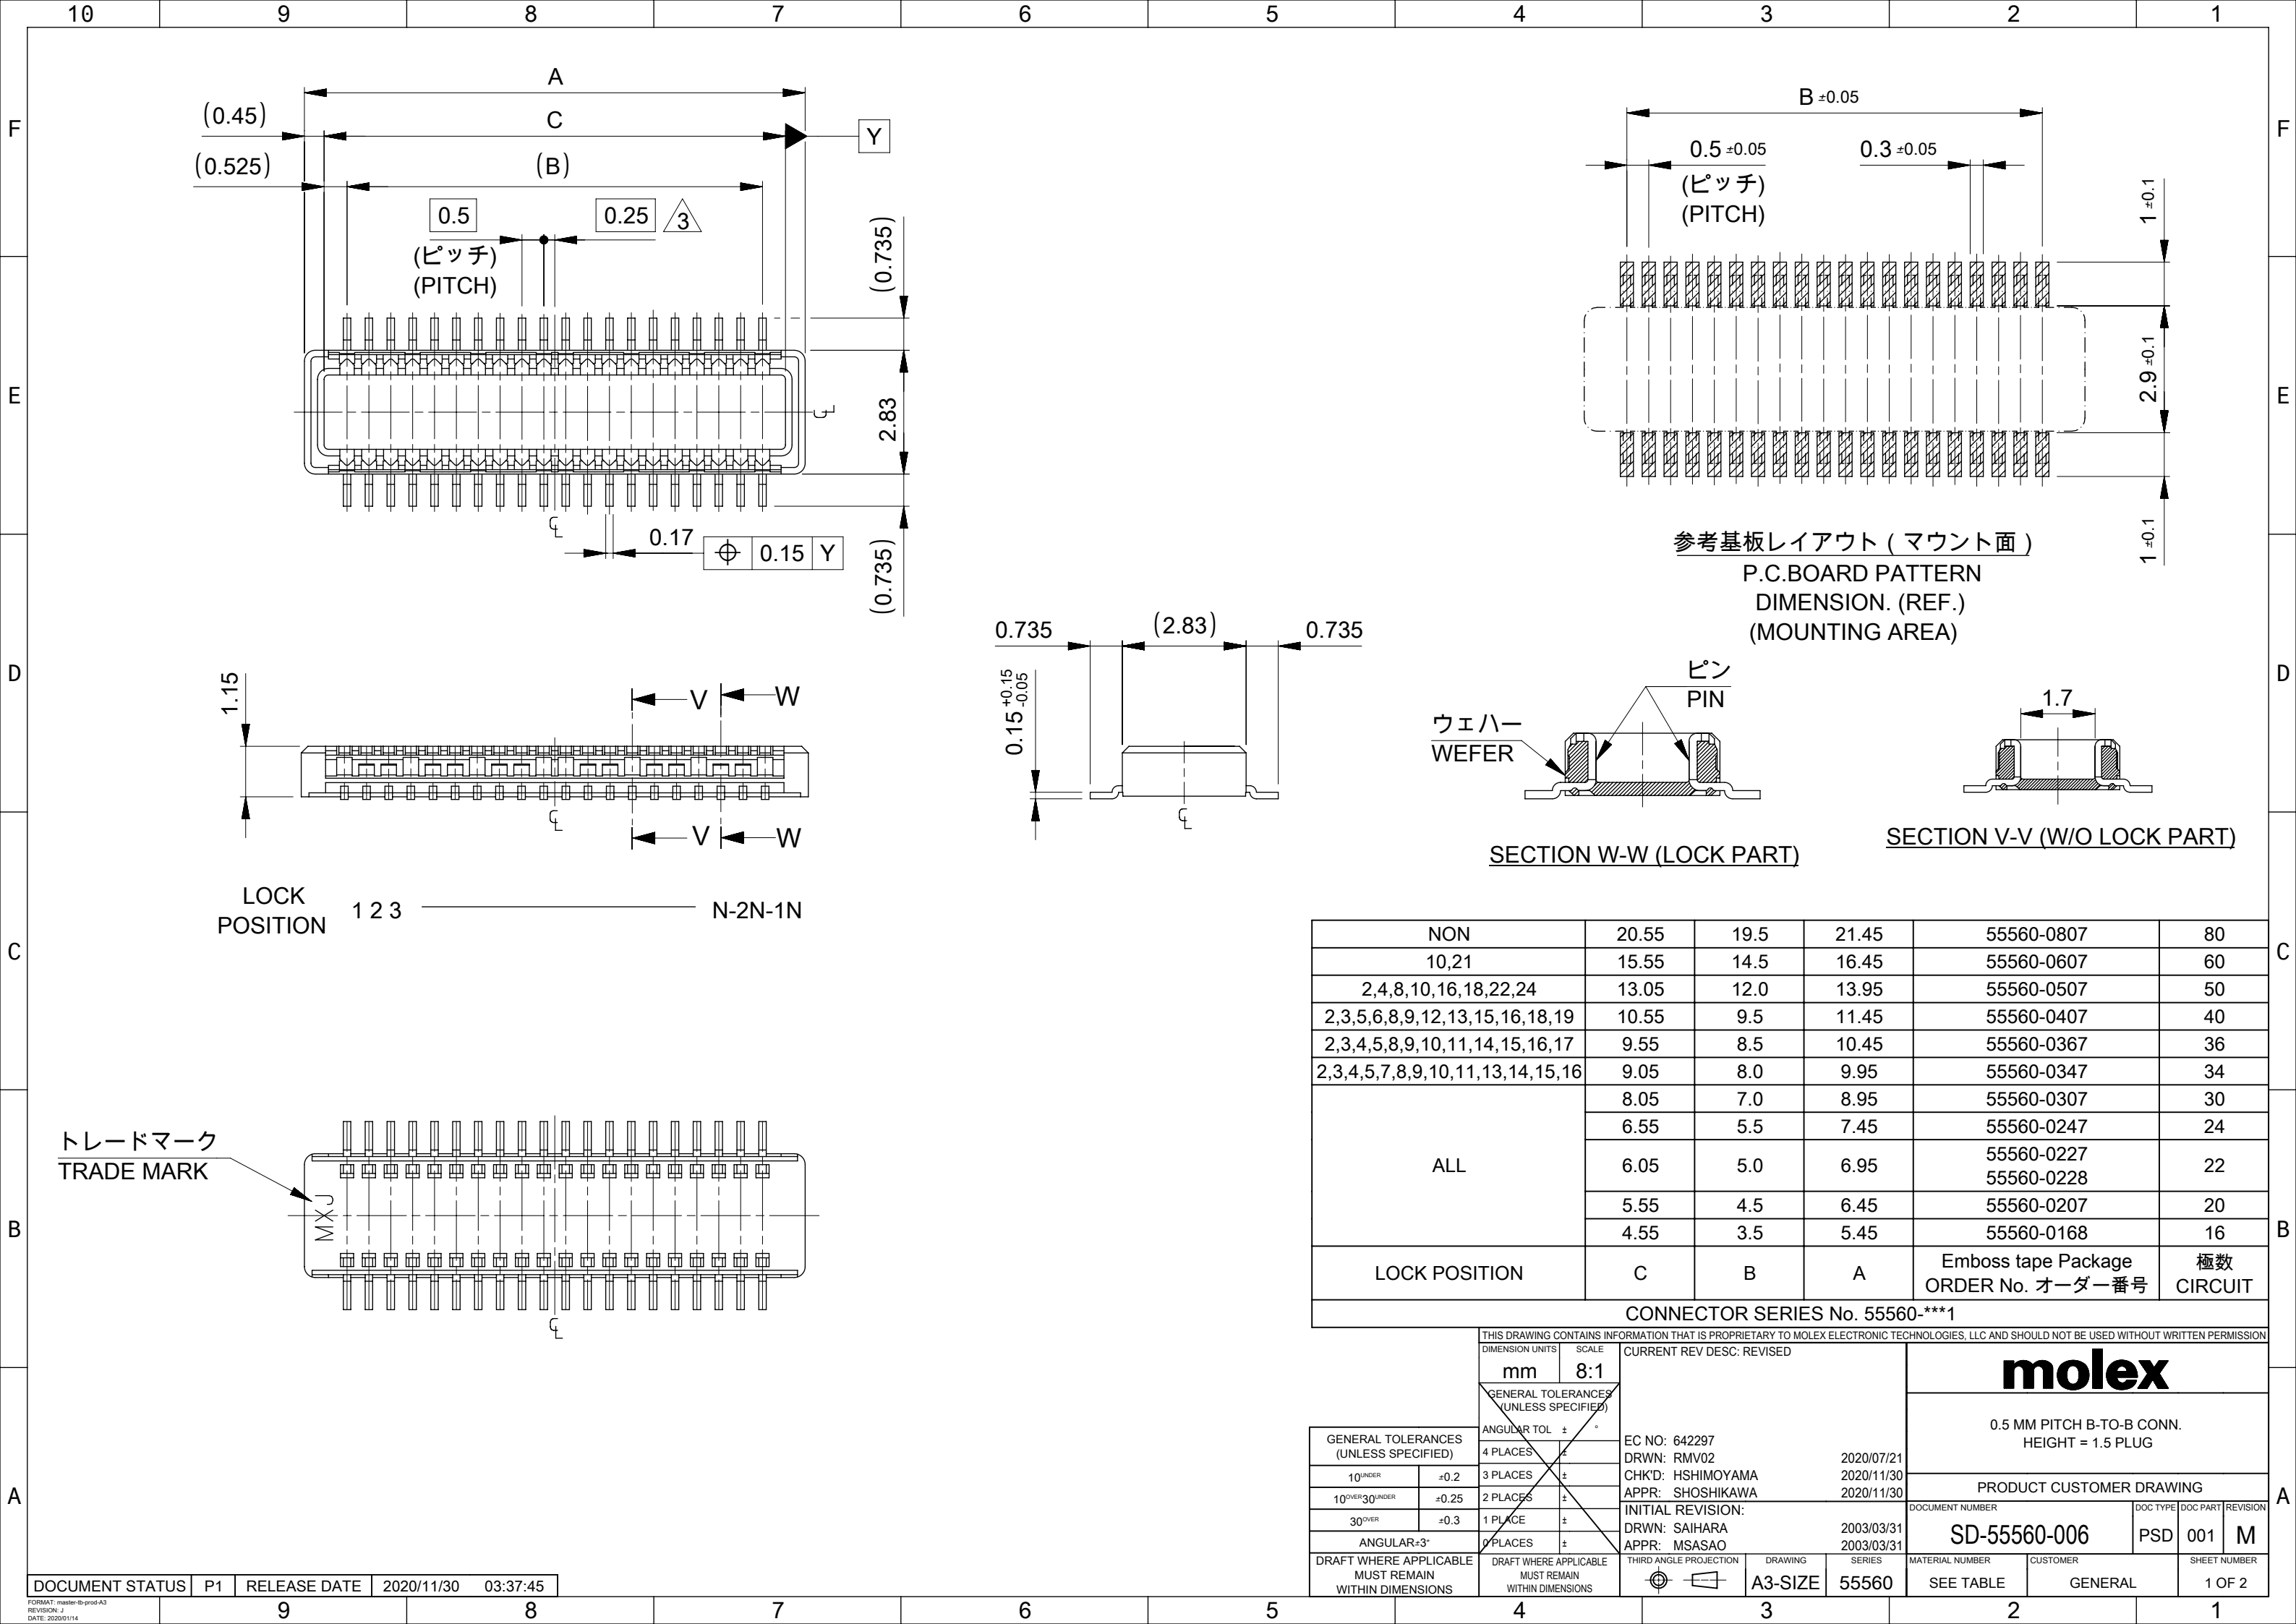



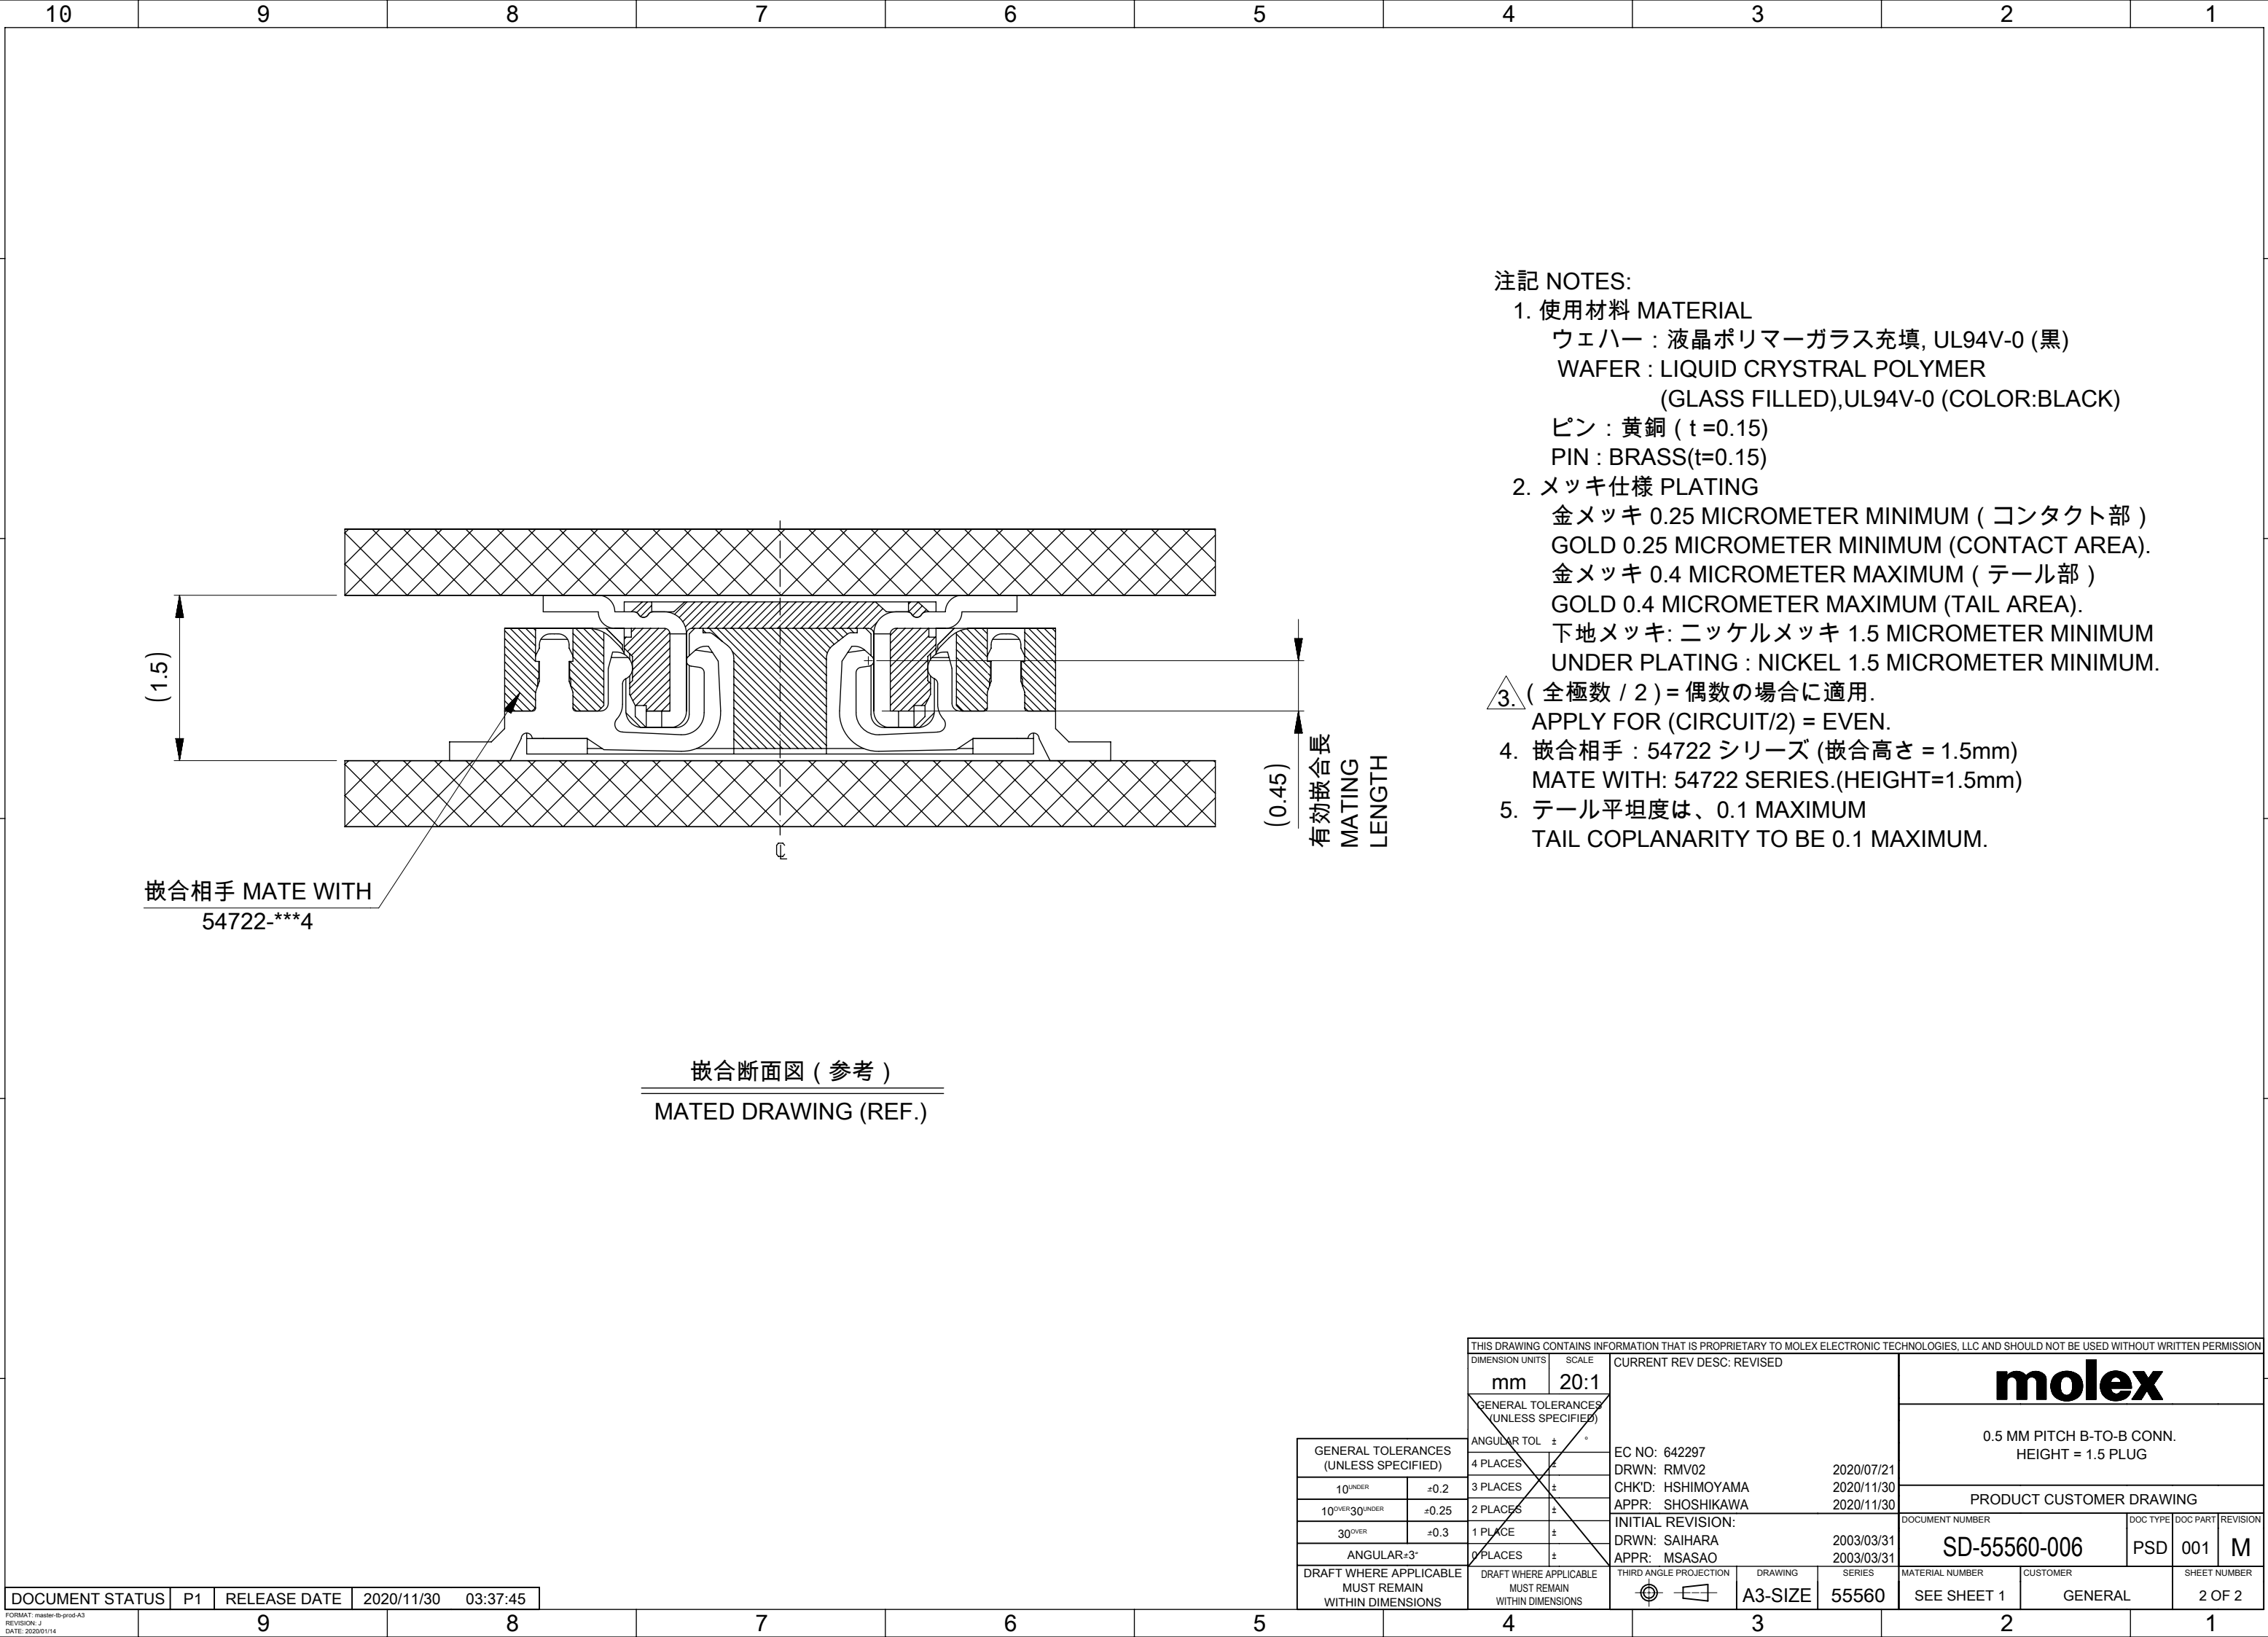




- 注記 NOTES:
- 1. 使用材料 MATERIAL
ウェハー : 液晶ポリマーガラス充填, UL94V-0 (黒)
WAFER : LIQUID CRYSTRAL POLYMER (GLASS FILLED),UL94V-0 (COLOR:BLACK)
ピン : 黄銅 (t=0.15)
PIN : BRASS(t=0.15)
 - 2. メッキ仕様 PLATING
金メッキ 0.25 MICROMETER MINIMUM (コンタクト部)
GOLD 0.25 MICROMETER MINIMUM (CONTACT AREA).
金メッキ 0.4 MICROMETER MAXIMUM (テール部)
GOLD 0.4 MICROMETER MAXIMUM (TAIL AREA).
下地メッキ: ニッケルメッキ 1.5 MICROMETER MINIMUM
UNDER PLATING : NICKEL 1.5 MICROMETER MINIMUM.
 - 3. (全極数 / 2) = 偶数の場合に適用.
APPLY FOR (CIRCUIT/2) = EVEN.
 - 4. 嵌合相手 : 54722 シリーズ (嵌合高さ = 1.5mm)
MATE WITH: 54722 SERIES.(HEIGHT=1.5mm)
 - 5. テール平坦度は、0.1 MAXIMUM
TAIL COPLANARITY TO BE 0.1 MAXIMUM.


嵌合断面図 (参考)
MATED DRAWING (REF.)

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											
DIMENSION UNITS		SCALE		CURRENT REV DESC: REVISED			molex				
mm		20:1									
GENERAL TOLERANCES (UNLESS SPECIFIED)		GENERAL TOLERANCES (UNLESS SPECIFIED)		EC NO: 642297 DRWN: RMV02 2020/07/21 CHK'D: HSHIMOYAMA 2020/11/30 APPR: SHOSHIKAWA 2020/11/30 INITIAL REVISION: DRWN: SAIHARA 2003/03/31 APPR: MSASAO 2003/03/31			0.5 MM PITCH B-TO-B CONN. HEIGHT = 1.5 PLUG				
		ANGULAR TOL ± °									
		4 PLACES ±									
		3 PLACES ±									
		2 PLACES ±									
10 ^{UNDER}		±0.2		1 PLACE ±		PRODUCT CUSTOMER DRAWING					
10 ^{OVER} 30 ^{UNDER}		±0.25		0 PLACES ±							
30 ^{OVER}		±0.3		1 PLACE ±		DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION	
ANGULAR±3°				0 PLACES ±		SD-55560-006		PSD	001	M	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION 		DRAWING A3-SIZE	SERIES 55560	MATERIAL NUMBER SEE SHEET 1		CUSTOMER GENERAL	SHEET NUMBER 2 OF 2
DOCUMENT STATUS	P1	RELEASE DATE	2020/11/30	03:37:45							

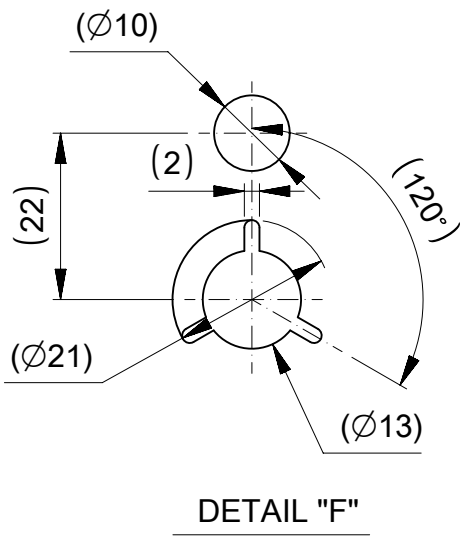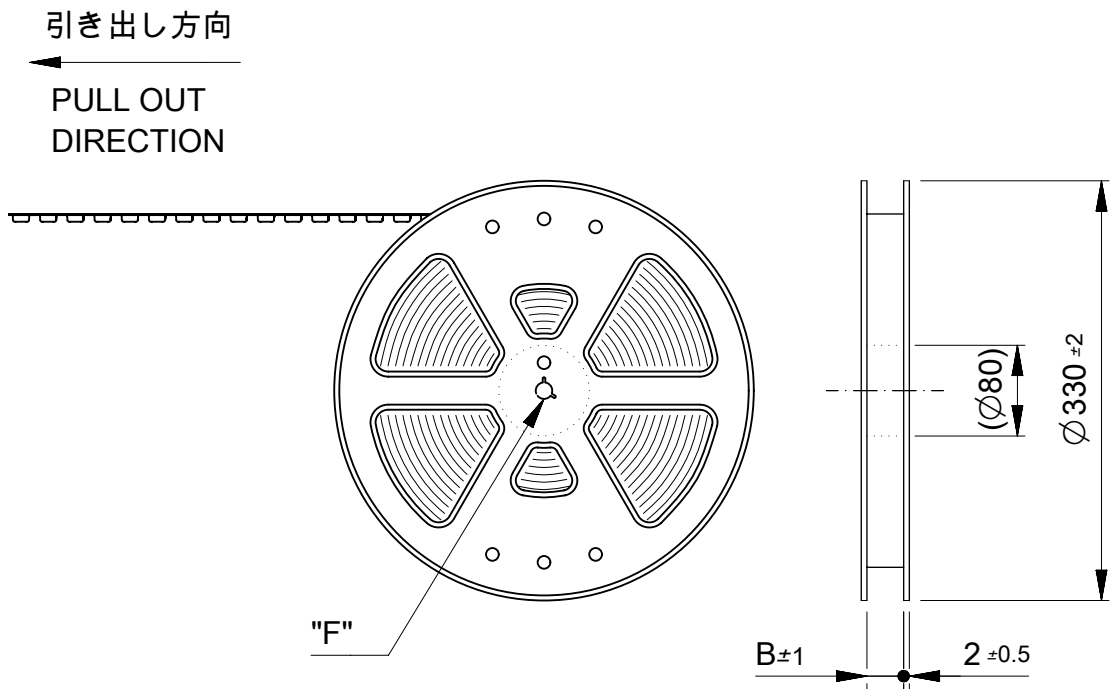


NOTE


- 製品詳細寸法については図面 SD-55560-006 を参照下さい。
DETAIL DIMENSIONS, SEE SD-55560-006
- 梱包数量：2000個 / リール
NUMBER OF CONNECTORS：2000PCS/REEL
- リードテープ長さ LEAD TAPE LENGTH


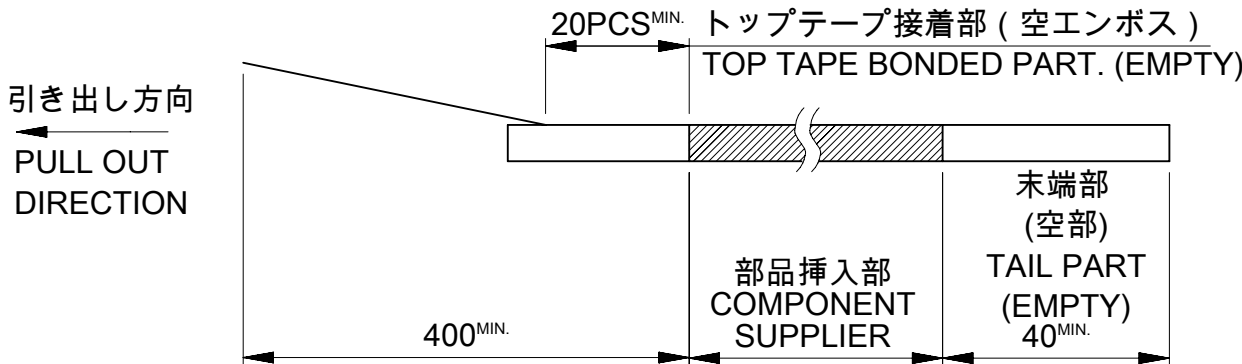


- トップテープの剥離強度：0.1N~0.7N(10.2gf~71.4gf)
(剥離方向は下図参照)
尚、本規格値は出荷時に適用.(但し、輸送時に剥離が発生しないこと.)
PEELING OFF FORCE OF TOP TAPE：0.1N~0.7N(10.2gf~71.4gf)
(PEELING DIRECTION AS SHOWN IN FOLLOWING FIG.)
THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT.
PEEL OFF SHOULD NOT BE ALLOWED, DURING TRANSPORTATION.

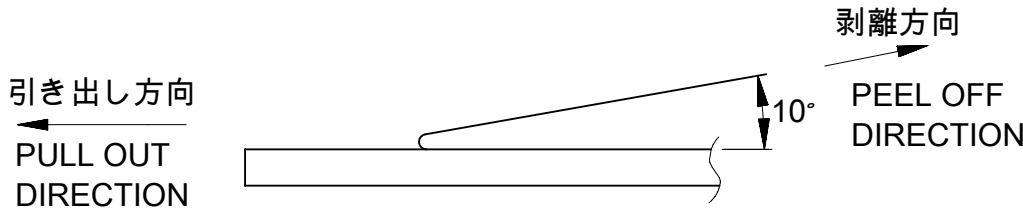

- 材料 キャリアテープ：ポリプロピレン (PP)
トップテープ：PET,PE,PEF
リール：ポリスチレン (PS) <リサイクル材を含む>
MATERIAL CARRIER TAPE：POLYPROPYLENE
TOP TAPE：PET,PE,PEF
REEL：POLYSTYRENE(PS)
< RECYCLE MATERIAL CONTAINED >

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										
DIMENSION UNITS		SCALE		CURRENT REV DESC: REVISED				molex		
mm	NTS									
GENERAL TOLERANCES (UNLESS SPECIFIED)								0.5 MM PITCH B-TO-B CONN. HEIGHT = 1.5 PLUG EMBOSS TAPE PACKAGE		
ANGULAR TOL ± °								PRODUCT CUSTOMER DRAWING		
4 PLACES ±		EC NO: 642297 DRWN: SCV 2020/07/24 CHK'D: HSHIMOYAMA 2020/11/30 APPR: SHOSHIKAWA 2020/11/30						DOCUMENT NUMBER SD-55560-008		DOC TYPE PSD
3 PLACES ±		INITIAL REVISION: DRWN: S.AIHARA 2000/11/28 APPR: M.FUKUSHIMA 2001/01/30								
2 PLACES ±										
1 PLACE ±										
0 PLACES ±										
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION 		DRAWING A3-SIZE	SERIES 55560	MATERIAL NUMBER SEE SHEET 2-3		CUSTOMER GENERAL		SHEET NUMBER 1 OF 3

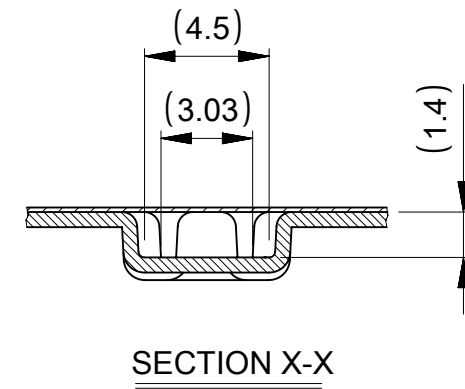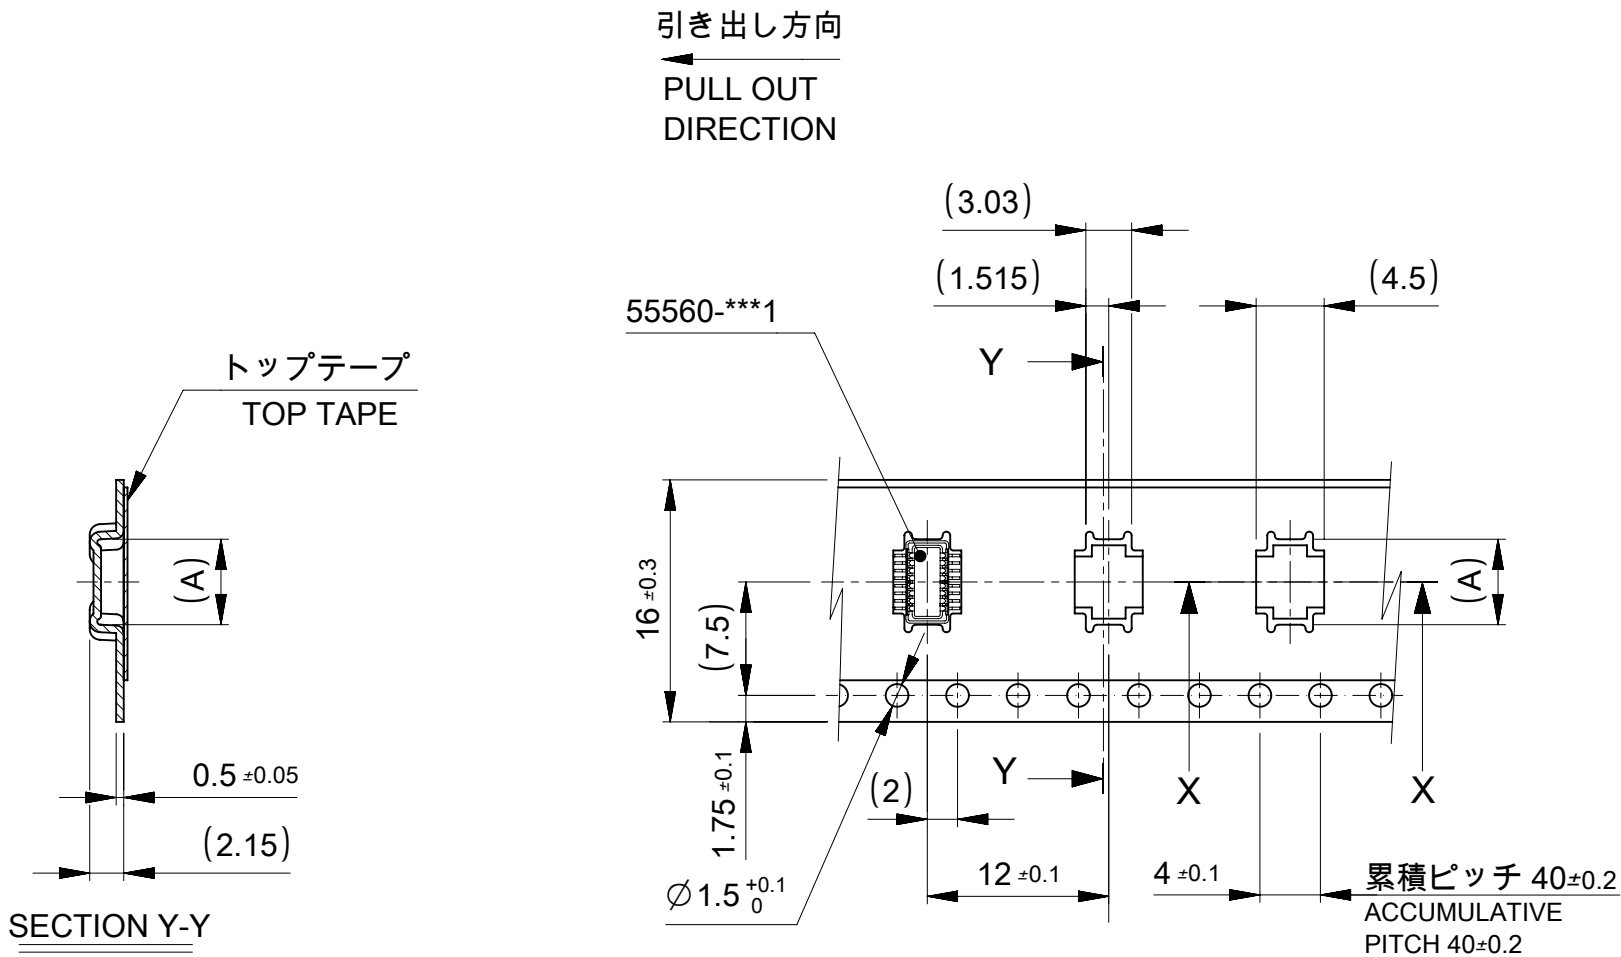


16 mm幅キャリアテープ
16mm WIDTH CARRIER TAPE

16	17.5	5.65	55560-0168	16
キャリアテープ幅 CARRIER TAPE WIDTH		B	(A)	極数 CIRCUIT

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION													
DIMENSION UNITS		SCALE		CURRENT REV DESC: REVISED			molex 0.5 MM PITCH B-TO-B CONN. HEIGHT = 1.5 PLUG EMBOSS TAPE PACKAGE						
mm		NTS											
GENERAL TOLERANCES (UNLESS SPECIFIED)		ANGULAR TOL		±	°	EC NO: 642297 DRWN: SCV 2020/07/24 CHK'D: HSHIMOYAMA 2020/11/30 APPR: SHOSHIKAWA 2020/11/30 INITIAL REVISION: DRWN: S.AIHARA 2000/11/28 APPR: M.FUKUSHIMA 2001/01/30							
		4 PLACES		±									
		3 PLACES		±									
		2 PLACES		±									
		1 PLACE		±									
0 PLACES		±		PRODUCT CUSTOMER DRAWING DOCUMENT NUMBER SD-55560-008 DOC TYPE PSD DOC PART 001 REVISION B									
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	
				A3-SIZE		55560		SEE TABLE		GENERAL		2 OF 3	

DOCUMENT STATUS	P1	RELEASE DATE	2020/11/30	03:37:48
-----------------	----	--------------	------------	----------

FORMAT: master-b-prod-A3
REVISION: J
DATE: 2020/01/14

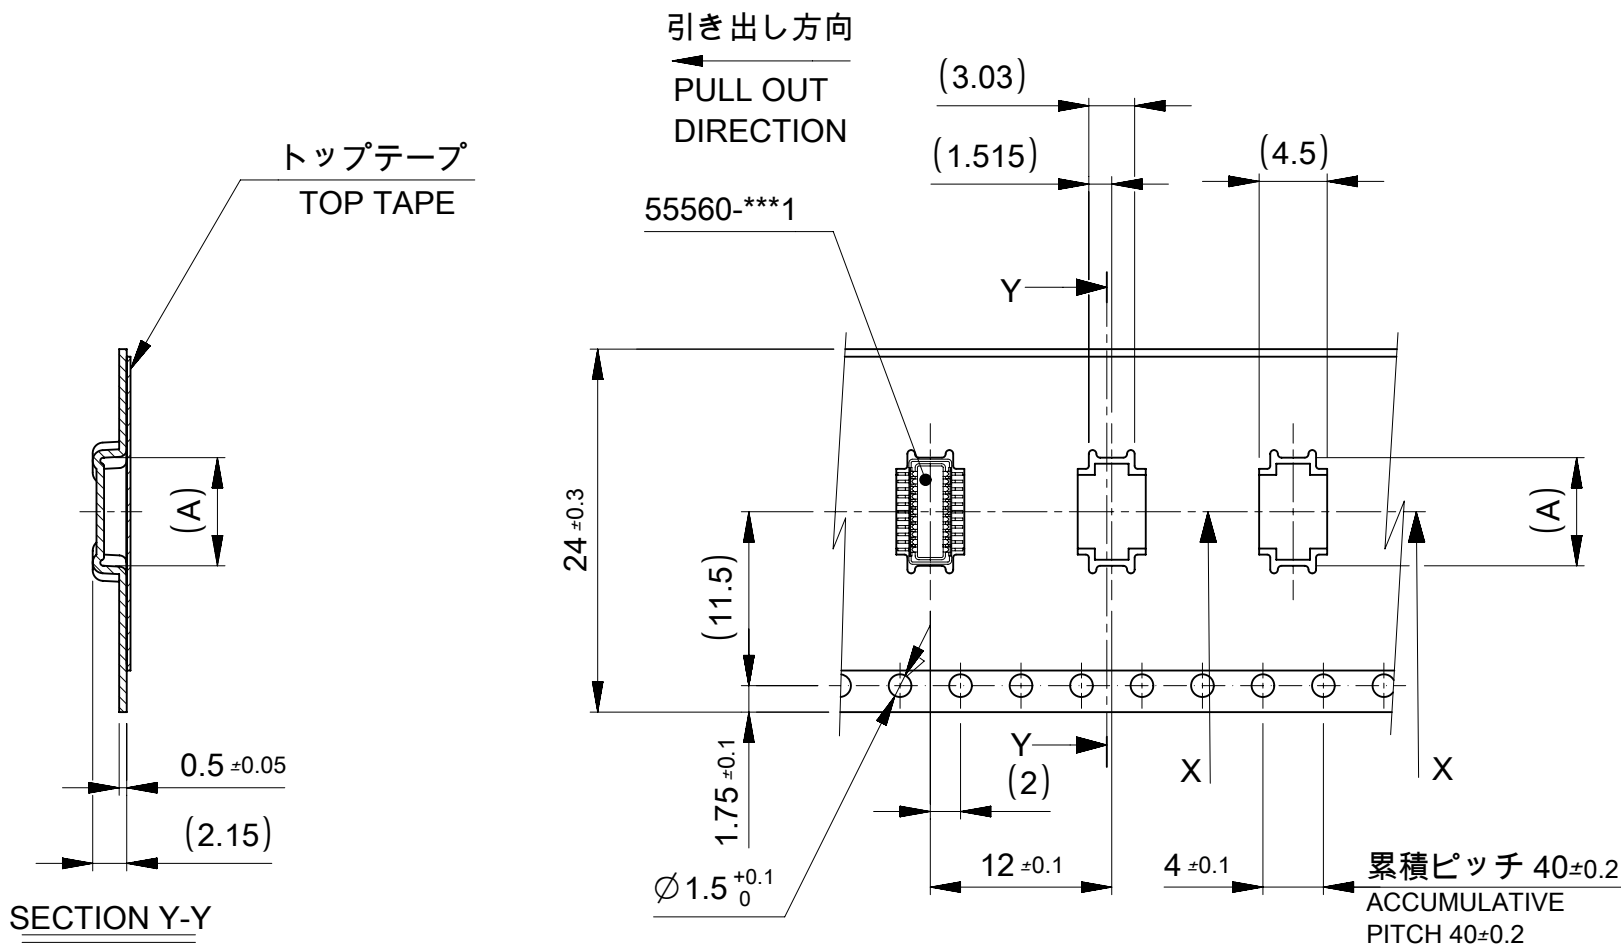

24 mm幅キャリアテープ
24mm WIDTH CARRIER TAPE

24	25.5	17.15	55560-0228	22
キャリアテープ幅 CARRIER TAPE WIDTH		B	(A)	極数 CIRCUIT

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC: REVISED		molex		
GENERAL TOLERANCES (UNLESS SPECIFIED)		EC NO: 642297 DRWN: SCV CHK'D: HSHIMOYAMA APPR: SHOSHIKAWA		0.5 MM PITCH B-TO-B CONN. HEIGHT = 1.5 PLUG EMBOSS TAPE PACKAGE		
GENERAL TOLERANCES (UNLESS SPECIFIED)		INITIAL REVISION:		PRODUCT CUSTOMER DRAWING		
10 _{UNDER}		DRWN: S.AIHARA		DOCUMENT NUMBER		
10 ^{OVER} 30 _{UNDER}		APPR: M.FUKUSHIMA		SD-55560-008		
30 ^{OVER}		THIRD ANGLE PROJECTION		DOC TYPE DOC PART REVISION		
ANGULAR+3°		DRAWING		PSD 001 B		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SERIES		SHEET NUMBER		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		A3-SIZE		3 OF 3		