
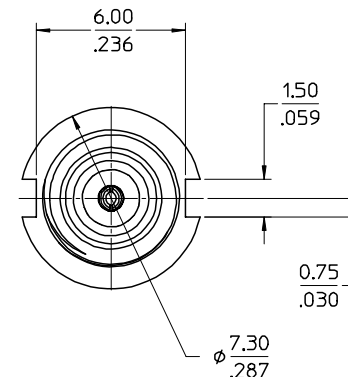


MATERIALS AND FINISHES

BODY, BRASS
PLATED GOLD (1 MICROINCHES MIN)/NICKEL(50 MICROINCHES MIN)

CENTER CONTACT BERYLLIUM COPPER
PLATED GOLD(30 MICROINCHES MIN)/NICKEL(100 MICROINCHES MIN)

INSULATOR PTFE

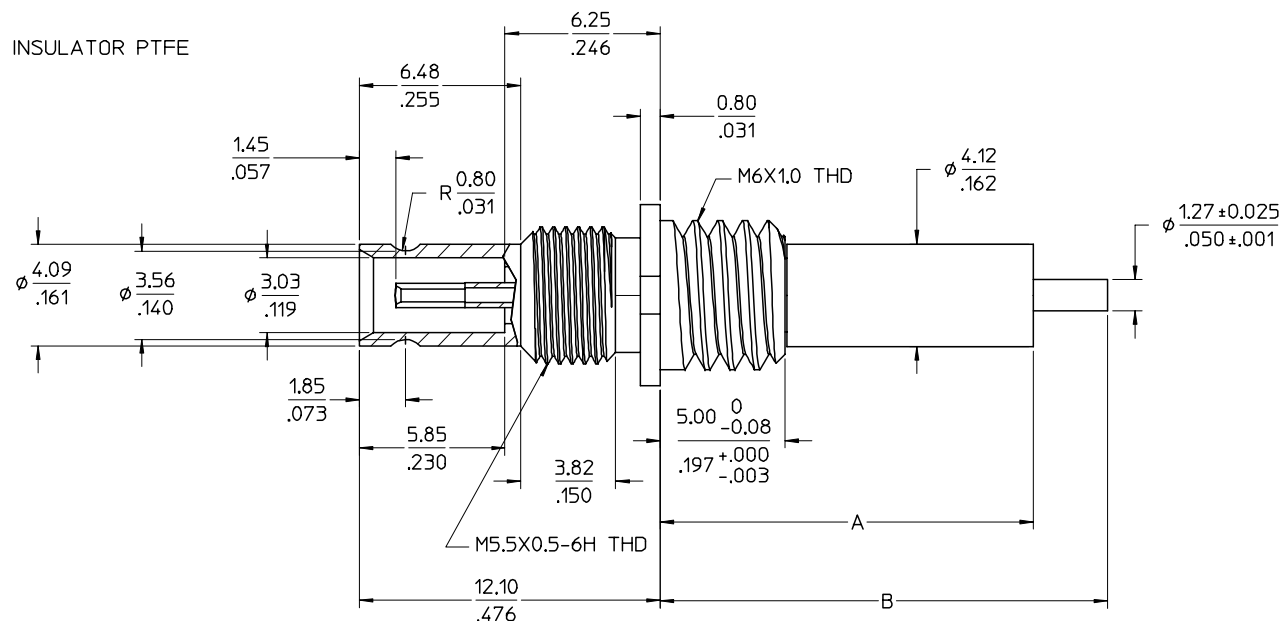

73174-0291	.276±.010	7.00±0.25	.453±.020	11.50±0.50
73174-0290	.591±.010	15.00±0.25	.709±.020	18.00±0.50
PART NO.	IN	MM	IN	MM
DIM A			DIM B	

- UNLESS OTHERWISE SPECIFIED DIMS ARE MILLIMETERS AND ANGLES ARE DEGREES.
- ALL OVER.
 - NO CHATTER OR NON-UNIFORM
 - SURFACE FINISH ALLOWED.
 - PARTS TO BE FREE OF BURRS & SHARP EDGES 0.13(.005) MAX BREAK.
 - EXTERNAL THREADS TO BE ROLLED OR SINGLE POINT.
 - DIAMETERS TO BE CONCENTRIC WITHIN 0.08(.003) TIR.

PS-89675-3390	PRODUCT SPECIFICATION
AS-89678-8750	CABLE ASSEMBLY INST
SPECIFICATION	DESCRIPTION

CHG: TABULATED DIM A AND DIM B. REDREW IN SD. ADDED -0291. UNIT WAS INCHES	EC NO. URF-2164 DRWN: SSS 06/01/04 CHK: TEF 06/01/04 APPR: JW 06/01/04 CHG: NEW RELEASE	EC NO. URF-1965 DRWN: SSS 01/13/04 CHK: TEF 01/13/04 APPR: JW 01/13/04	CHG: CONTACT PLATING WAS GOLD/COPPER DRWN: SSS 11/12/03	CHG: .197±.000/-003 WAS .197 DRWN: SSS 11/10/03	CHG: 0.050±.001 WAS 0.0502±.0010. 0.162 WAS 0.160 DRWN: SSS 11/05/03	CHG: XXX EC NO. URF-XXXX DRWN: XXX 00/00/00 CHK: XXX 00/00/00 APPR: XXX 00/00/00
A1	A1	A1	A1	A1	A1	A1

QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY
0	4 PLACES ± --- ± ---	INCH	INCH	10/2.3 DIN JACK STR REC	50 OHM
0	3 PLACES ± --- ± ---	DIMENSION STYLE	IN/MM	1.0/2.3-JC	
0	2 PLACES ± --- ± ---	DRAWN BY	DATE	MOLEX INCORPORATED	
0	1 PLACE ± --- ± ---	SSS	2003/10/29		
0	ANGULAR ±1/2°	CHECKED BY	DATE		
0	DRAFT WHERE APPLICABLE	TEF	2003/10/29		
0	MUST REMAIN WITHIN DIMENSIONS	APPROVED BY	DATE		
0		GMH	2003/10/29		
0		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			