


MATERIALS AND FINISHES:
BODY STAINLESS STEEL
PASSIVATED

CENTER CONTACT BERYLLIUM COPPER
PLATED GOLD

INSULATOR TEFLON

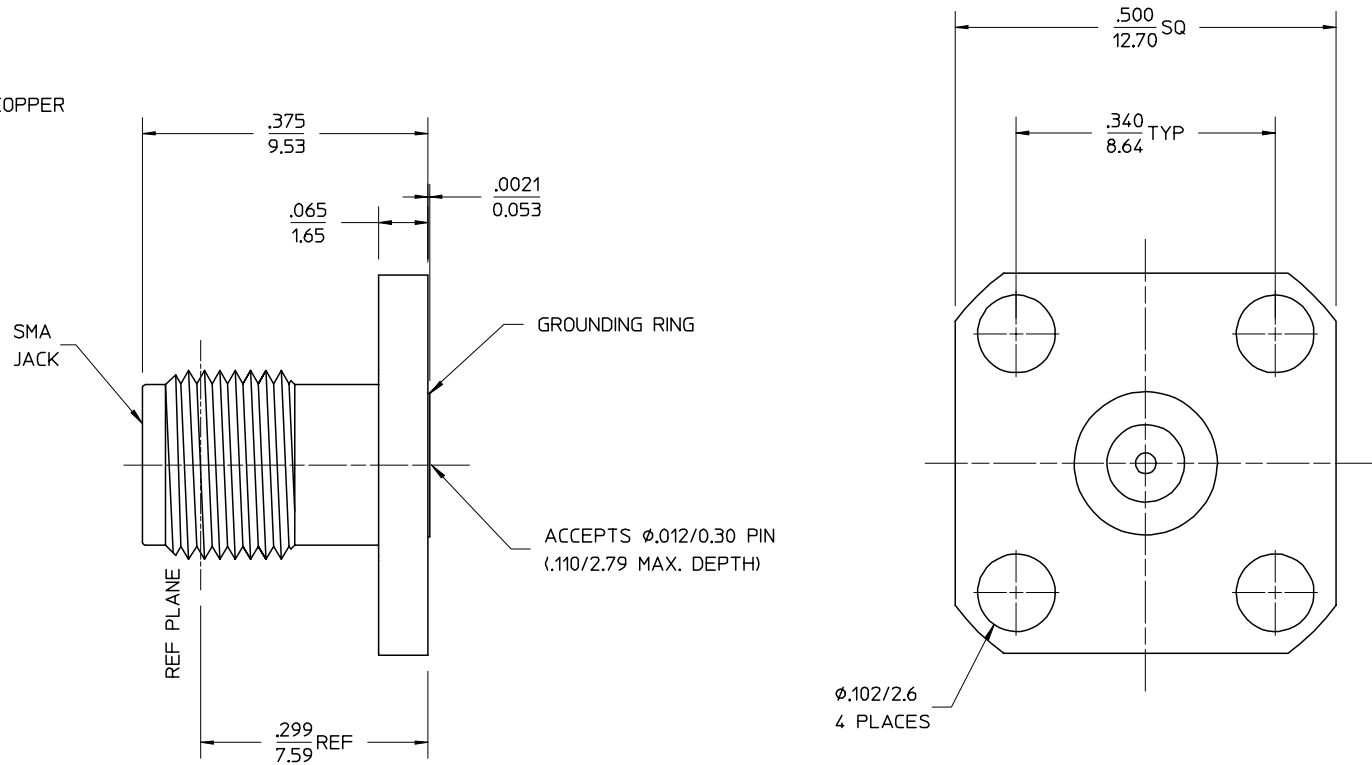

PART # 73251-0160

MIL-STD-348, FIGURE 310-2	INTERFACE
PS-89675-2910	ELECTRO/MECH PERFORMANCE
SPECIFICATION	DESCRIPTION

CHG: NEW RELEASE	EC NO. URF-0233	DRWN: TEF 06/21/99	CHK: DHG 06/21/99	APPR: GMH 06/21/99	DESCRIPTION
A	REV				

UNLESS OTHERWISE SPECIFIED DIMS
ARE INCHES AND ANGLES ARE DEGREES.
1. ✓ 63 ALL OVER.
2. NO CHATTER OR NON-UNIFORM
SURFACE FINISH ALLOWED.
3. PARTS TO BE FREE OF BURRS
& SHARP EDGES .005 MAX BREAK,
4. EXTERNAL THREADS TO BE ROLLED
OR SINGLE POINT.
5. DIAMETERS TO BE CONCENTRIC
WITHIN .003 TIR.

QUALITY
SYMBOLS



GENERAL TOLERANCES:
(UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± .0005	
3 PLACES	± .005	
2 PLACES	± .01	
1 PLACE	± .1	
ANGULAR: ± 1/2°		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		

SCALE

DESIGN UNITS
☐ mm ☒ INCH

THIRD ANGLE
PROJECTION

DIMENSIONS:	☐ mm ☒ INCH	☐ mm ONLY
-------------	--	----------------------------------

DRAWN BY & DATE EDC 12/10/97
CHECKED BY & DATE DHG 01/09/98
APPROVED BY & DATE GMH 01/09/98
CAD FILENAME

TITLE:
SMA JACK, RECEPTACLE, 4 HOLE
FLANGE MOUNT, ACCEPTS .012 DIA PIN
SMA-JR/F

MATERIAL NO.
SEE NOTE

DRAWING NO.
SD-73251-016

SHEET NO.
1 of 1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX
INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.

SIZE
B