

MATERIALS AND FINISHES



BODY, COUPLING NUT: SEE TABLE
PLATED SEE TABLE

CONTACT: BRASS
PLATED SEE TABLE

INSULATOR: TEFLON

GASKET: SILCONE RUBBER




C'RING: BERYLLIUM COPPER

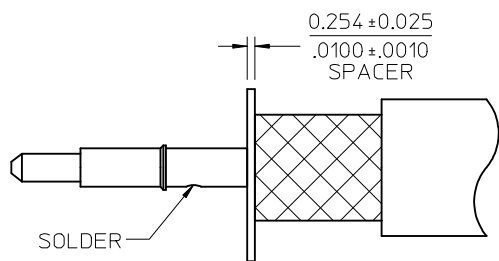

SMA PLUG
INTERFACE

2.16
.085

REF

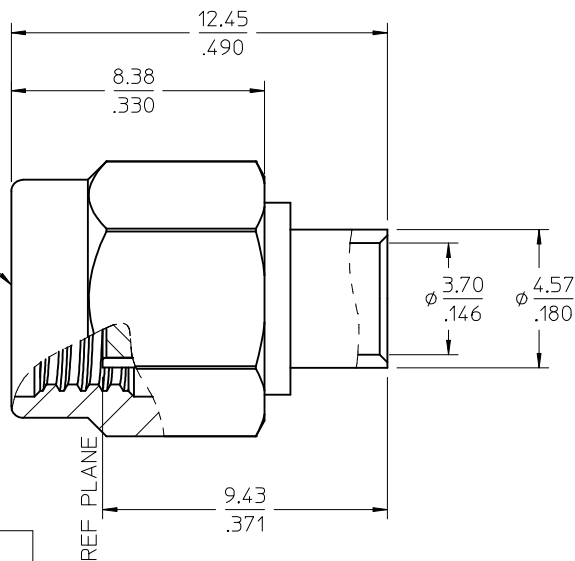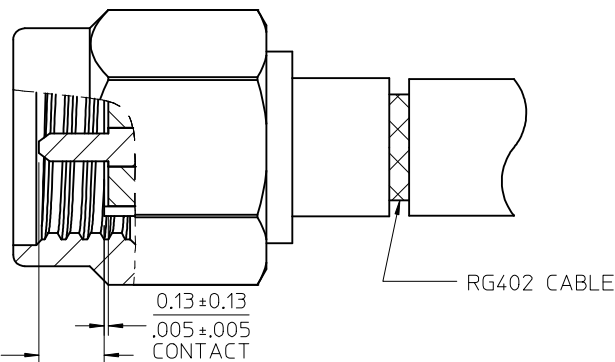

73251-0735	GOLD (1u MIN)	GOLD (5u MIN)	GOLD (1u MIN)	BRASS
73251-0734	GOLD (10u MIN)	GOLD (30u MIN)	GOLD (1u MIN)	BRASS
73251-0733	GOLD (30u MIN)	GOLD (30u MIN)	PASSIVATED	STAINLESS STEEL
73251-0732	GOLD (30u MIN)	GOLD (30u MIN)	GOLD (5u MIN)	STAINLESS STEEL
73251-0731	TRI-METAL	GOLD (30u MIN)	NICKEL(70u MIN)	BRASS
73251-0730	GOLD (10u MIN)	GOLD (10u MIN)	GOLD (1u MIN)	BRASS
PART NO.	BODY	CONTACT	COUPLING NUT	BODY/COUPLING NUT

PS-89675-3640	ELEX/MECH PERFORMANCE
MIL-STD-348A, FIG. 310.1	INTERFACE
SPECIFICATION	DESCRIPTION

CHG:ADDED -0735
PER PDR/5082030

EC NO: URF2016-0120
DRWN:RYEH
CHKD:
APPR:YCHENG

2015/08/17
2015/08/21
REV

QUALITY
SYMBOLS
▽=0
▽=0
▽=0

GENERAL TOLERANCES
(UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± .---	± .---
3 PLACES	± .---	± .---
2 PLACES	± .---	± .---
1 PLACE	± .---	± .---
0 PLACE	±	±

ANGULAR ± 2 °
DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE
MM/IN

DRAWN BY	DATE
SSS	2000/07/06
CHECKED BY	DATE
TEF	2000/07/06
APPROVED BY	DATE
GMH	2000/07/06

MATERIAL NO.
SEE TABLE

SCALE
8:1

DESIGN UNITS
METRIC

THIRD ANGLE
PROJECTION

TITLE
SMA PLUG STR RG402
50 OHMS, EWR-3418
SMA-PC
molex

DOCUMENT NO.
SD-73251-073

SHEET NO.
1 OF 1

MATERIALS AND FINISHES



BODY, COUPLING NUT: SEE TABLE
PLATED SEE TABLE

CONTACT: BRASS
PLATED SEE TABLE

INSULATOR: TEFLON

GASKET: SILCONE RUBBER




C'RING: BERYLLIUM COPPER

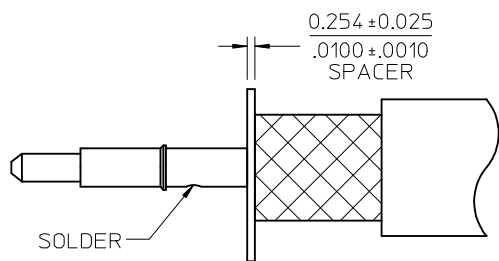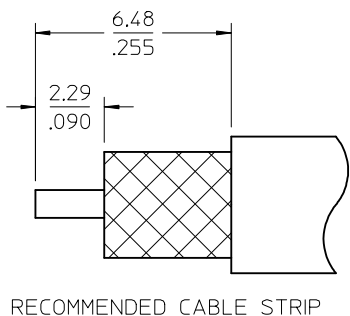

SMA PLUG
INTERFACE

2.16
.085

REF

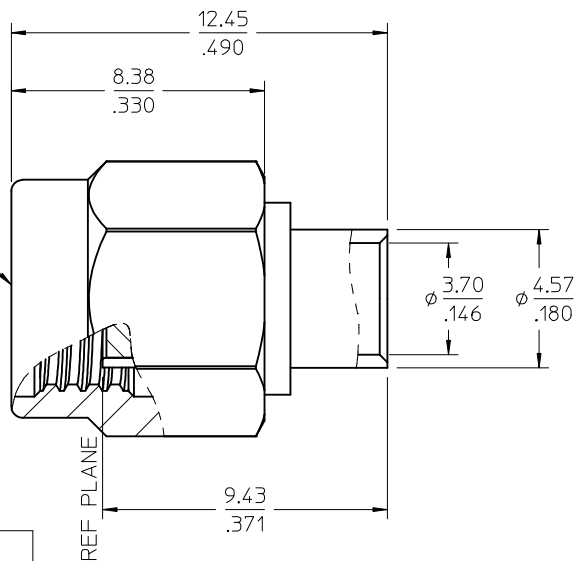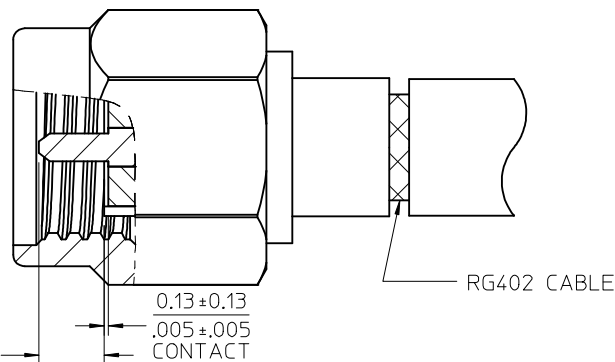

73251-0735	GOLD (1u MIN)	GOLD (5u MIN)	GOLD (1u MIN)	BRASS
73251-0734	GOLD (10u MIN)	GOLD (30u MIN)	GOLD (1u MIN)	BRASS
73251-0733	GOLD (30u MIN)	GOLD (30u MIN)	PASSIVATED	STAINLESS STEEL
73251-0732	GOLD (30u MIN)	GOLD (30u MIN)	GOLD (5u MIN)	STAINLESS STEEL
73251-0731	TRI-METAL	GOLD (30u MIN)	NICKEL(70u MIN)	BRASS
73251-0730	GOLD (10u MIN)	GOLD (10u MIN)	GOLD (1u MIN)	BRASS
PART NO.	BODY	CONTACT	COUPLING NUT	BODY/COUPLING NUT

PS-89675-3640	ELEX/MECH PERFORMANCE
MIL-STD-348A, FIG. 310.1	INTERFACE
SPECIFICATION	DESCRIPTION

CHG:ADDED -0735
PER PDR/5082030

EC NO: URF2016-0120
DRWN:RYEH
CHKD:
APPR:YCHENG

2015/08/17
2015/08/21
REV

QUALITY
SYMBOLS
▽=0
▽=0
▽=0

GENERAL TOLERANCES
(UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± .---	± .---
3 PLACES	± .---	± .---
2 PLACES	± .---	± .---
1 PLACE	± .---	± .---
0 PLACE	±	±

ANGULAR ± 2 °
DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE
MM/IN

DRAWN BY	DATE
SSS	2000/07/06
CHECKED BY	DATE
TEF	2000/07/06
APPROVED BY	DATE
GMH	2000/07/06

MATERIAL NO.
SEE TABLE

SCALE
8:1

DESIGN UNITS
METRIC

THIRD ANGLE
PROJECTION

TITLE
SMA PLUG STR RG402
50 OHMS, EWR-3418
SMA-PC
molex

DOCUMENT NO.
SD-73251-073

SHEET NO.
1 OF 1