


MATERIALS AND FINISHES:
BODY STAINLESS STEEL
PASSIVATED

CENTER CONTACT BERYLLIUM COPPER
PLATED GOLD

INSULATOR TEFLON

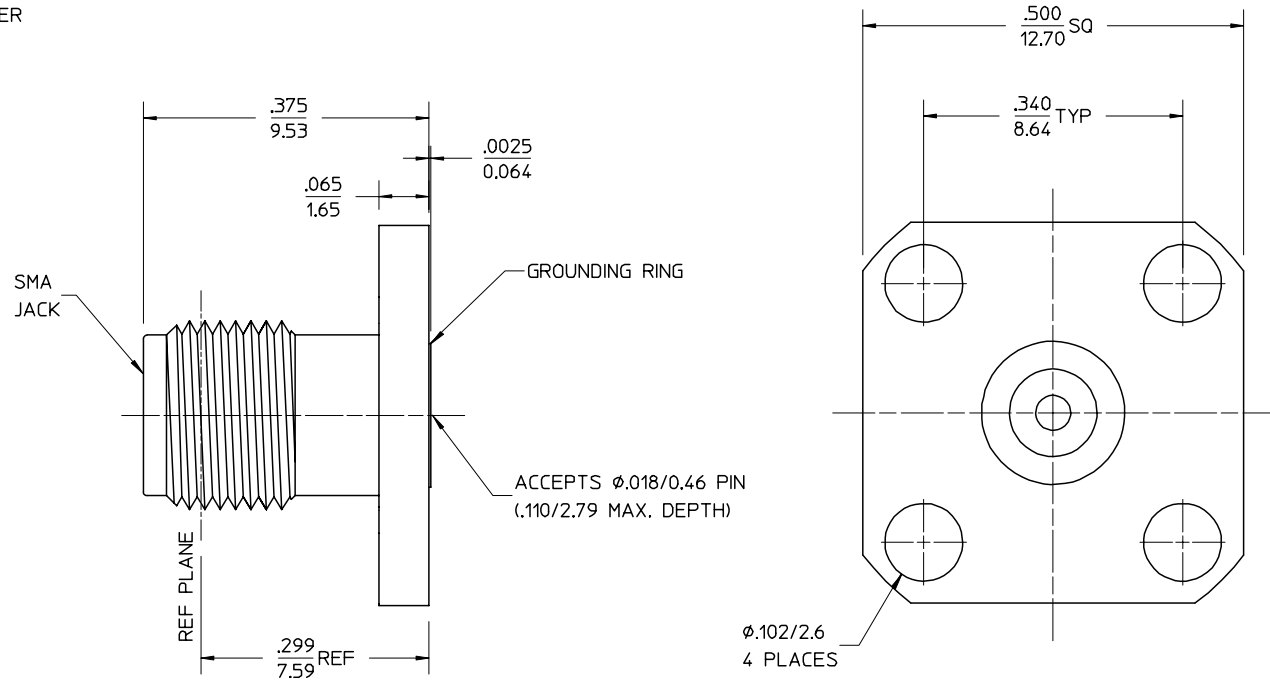

PART # 73251-0800

MIL-STD-348, FIGURE 310-2	INTERFACE
PS-89675-2910	ELECTRO/MECH PERFORMANCE
SPECIFICATION	DESCRIPTION

CNG: NEW RELEASE	EC NO. URF-0233	DRWN: TEF 06/21/99	CHK: DHG 06/21/99	APPR: GMH 06/21/99	DESCRIPTION
A	REV				

- UNLESS OTHERWISE SPECIFIED DIMS ARE INCHES AND ANGLES ARE DEGREES.
1. $\sqrt{63}$ ALL OVER.
 2. NO CHATTER OR NON-UNIFORM SURFACE FINISH ALLOWED.
 3. PARTS TO BE FREE OF BURRS & SHARP EDGES .005 MAX BREAK.
 4. EXTERNAL THREADS TO BE ROLLED OR SINGLE POINT.
 5. DIAMETERS TO BE CONCENTRIC WITHIN .003 TIR.

QUALITY SYMBOLS



GENERAL TOLERANCES:
(UNLESS SPECIFIED)

	mm	INCH
4 PLACES	±.0005	±.0005
3 PLACES	±.005	±.005
2 PLACES	±.01	±.01
1 PLACE	±.1	±.1
ANGULAR:	±2°	

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

SCALE

DESIGN UNITS
☐ mm ☒ INCH

DRAWN BY & DATE EDC 02/19/99
CHECKED BY & DATE DHG 02/19/99
APPROVED BY & DATE GMH 02/19/99
CAD FILENAME

THIRD ANGLE PROJECTION

TITLE:
SMA JACK, RECEPTACLE, 4 HOLE
FLANGE MOUNT, ACCEPTS .018 DIA PIN
SMA-JR/F

MATERIAL NO. SEE NOTE	DRAWING NO. SD-73251-080	SHEET NO. 1 of 1
--------------------------	-----------------------------	---------------------

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.

SIZE
B