


MATERIALS AND FINISHES:
BODY STAINLESS STEEL
PASSIVATED

CENTER CONTACT BERYLLIUM COPPER
PLATED GOLD

INSULATOR TEFLON

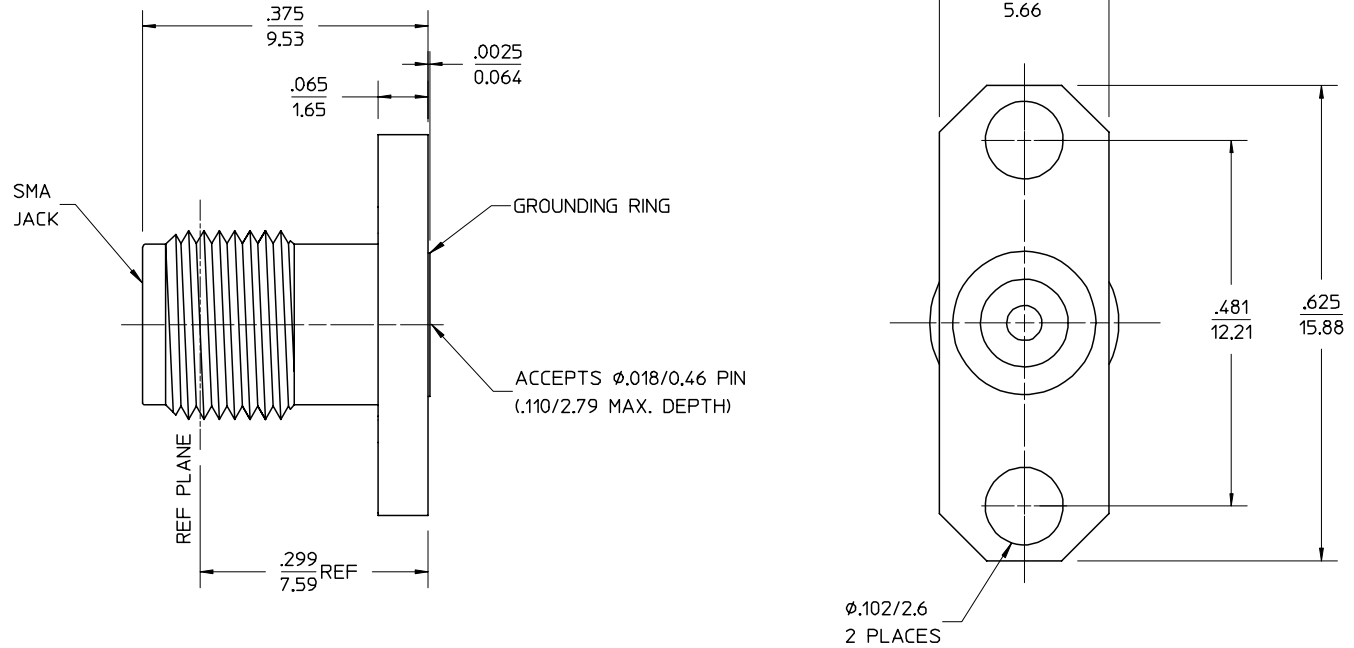

PART # 73251-0920

MIL-STD-348, FIGURE 310-2	INTERFACE
PS-89675-2910	ELECTRO/MECH PERFORMANCE
SPECIFICATION	DESCRIPTION

CHG: NEW RELEASE	DESCRIPTION
EC NO. URF-0233	REV
DRWN: TEF 06/21/99	
CHK: DHG 06/21/99	
APPR: GMH 06/21/99	
A	

UNLESS OTHERWISE SPECIFIED DIMS ARE INCHES AND ANGLES ARE DEGREES.

- ✓ 63 ALL OVER.
- NO CHATTER OR NON-UNIFORM SURFACE FINISH ALLOWED.
- PARTS TO BE FREE OF BURRS & SHARP EDGES .005 MAX BREAK.
- EXTERNAL THREADS TO BE ROLLED OR SINGLE POINT.
- DIAMETERS TO BE CONCENTRIC WITHIN .003 TIR.

QUALITY SYMBOLS



GENERAL TOLERANCES: (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± _____	± .0005
3 PLACES	± _____	± .005
2 PLACES	± _____	± .01
1 PLACE	± _____	± .1
ANGULAR:		± 2°
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		

SCALE

DESIGN UNITS

☐ mm	☒ INCH
☐ mm	☐ INCH
☐ mm	☐ INCH

THIRD ANGLE PROJECTION

TITLE:
SMA JACK, RECEPTACLE, 2 HOLE
FLANGE MOUNT, ACCEPTS .018 DIA PIN
SMA-JR/F

MATERIAL NO.
SEE NOTE

DRAWING NO.
SD-73251-092

1	A
SHT	REV
REVISE ON CAD ONLY	

SHEET NO. 1 of 1	SIZE B
---------------------	-----------