


INSULATOR TEFLON

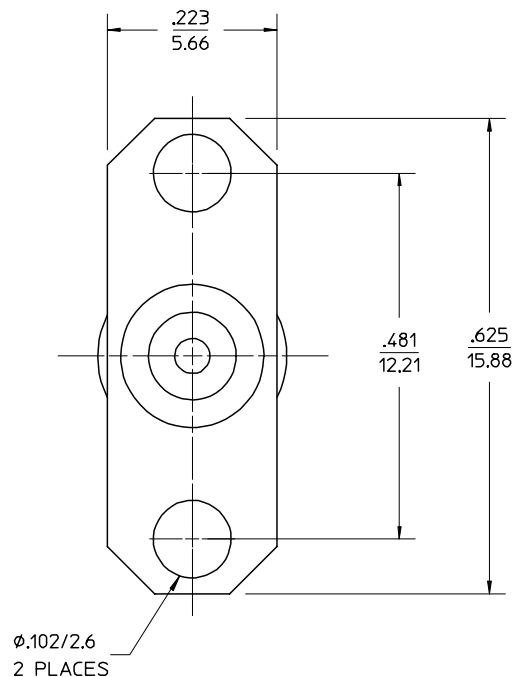

MIL-STD-348, FIGURE 310-2	INTERFACE
PS-89675-2910	ELECTRO/MECH PERFORMANCE
SPECIFICATION	DESCRIPTION

UNLESS OTHERWISE SPECIFIED DIMS
ARE INCHES AND ANGLES ARE DEGREES.

1. ✓ 63 ALL OVER.
2. NO CHATTER OR NON-UNIFORM
SURFACE FINISH ALLOWED.
3. PARTS TO BE FREE OF BURRS
& SHARP EDGES .005 MAX BREAK.
4. EXTERNAL THREADS TO BE ROLLED
OR SINGLE POINT.
5. DIAMETERS TO BE CONCENTRIC
WITHIN .003 TIR.

GENERAL TOLERANCES: (UNLESS SPECIFIED)		
	mm	INCH
PLACES	± _____	± .0005
PLACES	± _____	± .005
PLACES	± _____	± .01
PLACE	± _____	± .1

ANGULAR: ±2°

RAFT WHERE APPLICABLE MUST
REMAIN WITHIN DIMENSIONS

SCALE _____	DESIGN UNITS ☐ mm ☒ INCH
DRAWN BY & DATE EDC 02/19/99	
CHECKED BY & DATE DHG 02/19/99	
APPROVED BY & DATE GMH 02/19/99	
CAD FILENAME _____	
THIS DRAWING CONTAINS	

 THIRD ANGLE PROJECTION	☐ mm INCH	☒ INCH mm	☐ mm ONLY	REVISE ON CAD ONLY
	TITLE: SMA JACK, RECEPTACLE, 2 HOLE FLANGE MOUNT, ACCEPTS .015 DIA PIN SMA-JR/F			
 MOLEX INCORPORATED				
MATERIAL NO. SEE NOTE	DRAWING NO. SD-73251-094			SHEET NO. 1 of 1
THIS INFORMATION THAT IS PROPRIETARY TO MOLEX				SIZE