


MATERIALS AND FINISHES:
BODY STAINLESS STEEL
PASSIVATED

CENTER CONTACT BERYLLIUM COPPER
PLATED GOLD

INSULATOR TEFLON

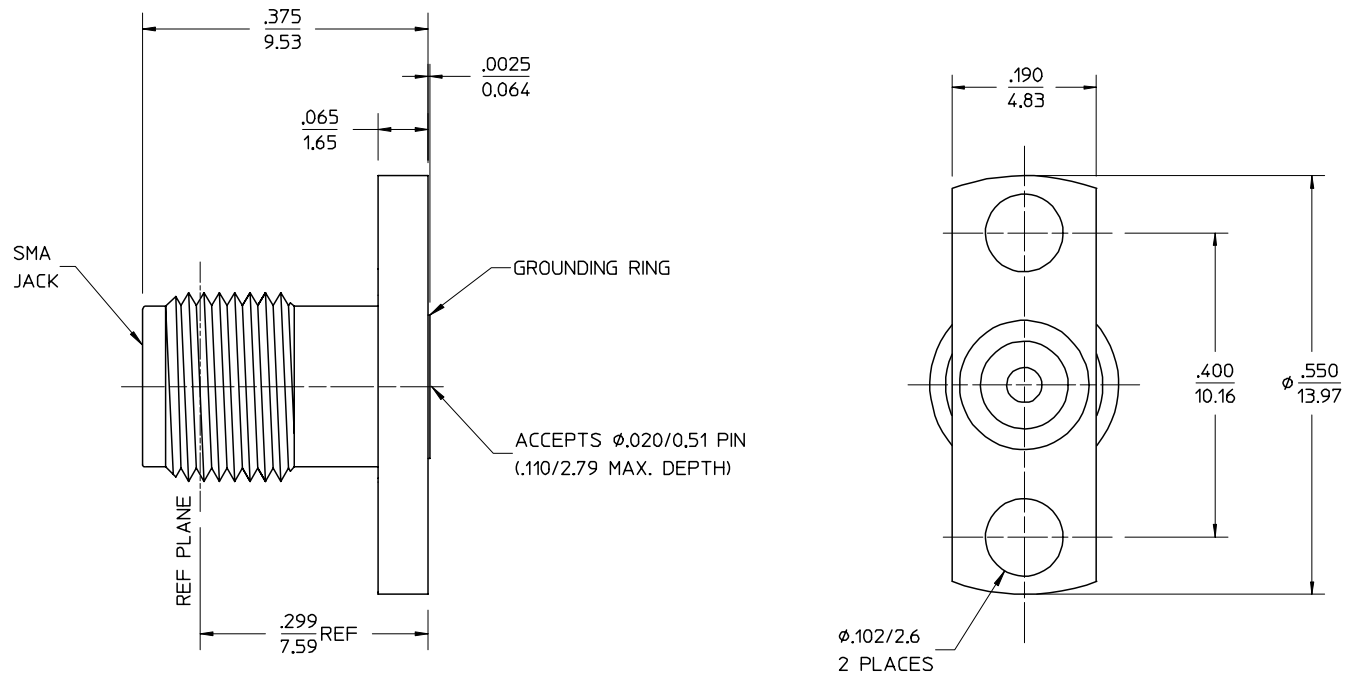

PART # 73251-0960

MIL-STD-348, FIGURE 310-2	INTERFACE
PS-89675-2910	ELECTRO/MECH PERFORMANCE
SPECIFICATION	DESCRIPTION

CHG: NEW RELEASE	EC NO. URF-0233	DRWN: TEF 06/21/99	CHK: DHG 06/21/99	APPR: GMH 06/21/99	DESCRIPTION
A	REV				

UNLESS OTHERWISE SPECIFIED DIMS
ARE INCHES AND ANGLES ARE DEGREES.

- ✓ 63 ALL OVER.
- NO CHATTER OR NON-UNIFORM
SURFACE FINISH ALLOWED.
- PARTS TO BE FREE OF BURRS
& SHARP EDGES .005 MAX BREAK.
- EXTERNAL THREADS TO BE ROLLED
OR SINGLE POINT.
- DIAMETERS TO BE CONCENTRIC
WITHIN .003 TIR.

QUALITY
SYMBOLS



GENERAL TOLERANCES:
(UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± .0005	
3 PLACES	± .005	
2 PLACES	± .01	
1 PLACE	± .1	

ANGULAR: ±2°

DRAFT WHERE APPLICABLE MUST
REMAIN WITHIN DIMENSIONS

SCALE

DESIGN UNITS

EDC 02/19/99

DRAWN BY & DATE

CHECKED BY & DATE

APPROVED BY & DATE

GMH 02/19/99

CAD FILENAME

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX
INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.

THIRD ANGLE
PROJECTION

TITLE:
SMA JACK, RECEPTACLE, 2 HOLE
FLANGE MOUNT, ACCEPTS .020 DIA PIN
SMA-JR/F

MOLEX MOLEX INCORPORATED

MATERIAL NO.
SEE NOTE

DIMENSIONS:
☐ mm ☒ INCH ☐ mm ONLY

REVISIONS

SHEET NO.
1 of 1

SD-73251-096

SIZE
B