


MATERIALS AND FINISHES:
BODY STAINLESS STEEL
PASSIVATED

CENTER CONTACT BERYLLIUM COPPER
PLATED GOLD

INSULATOR TEFLON

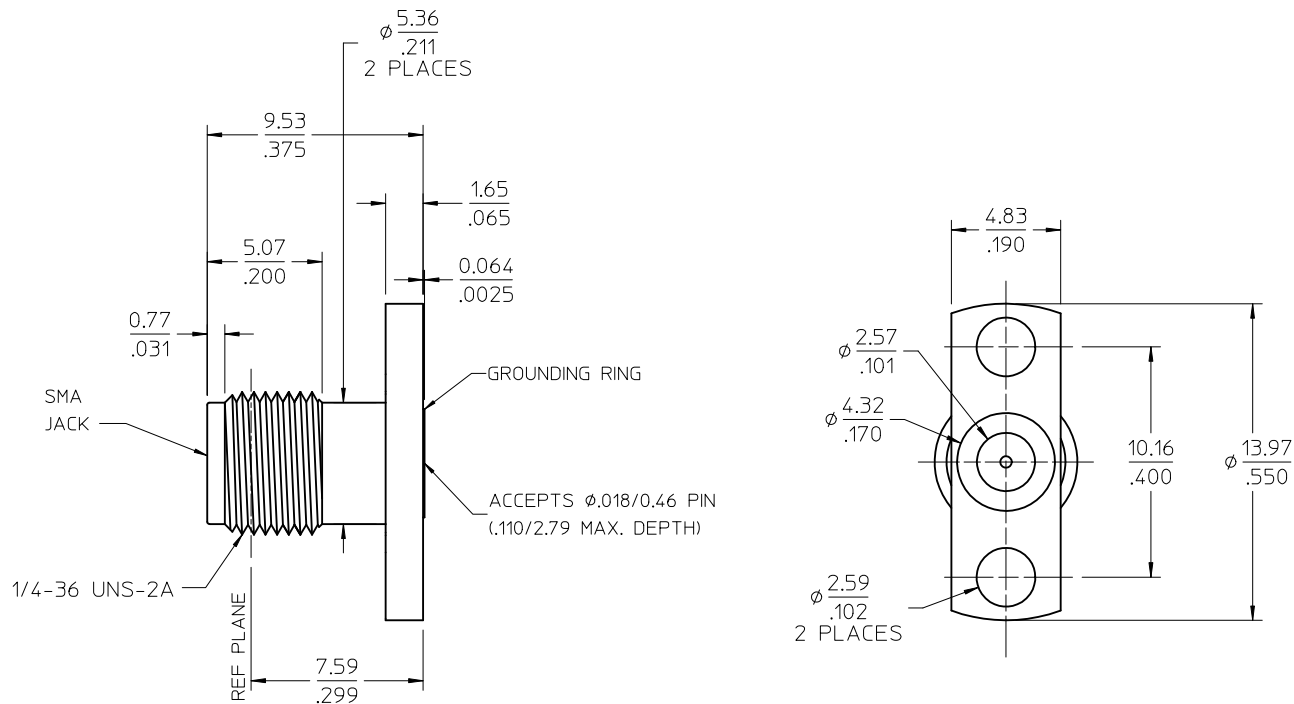

PART # 73251-0980

MIL-STD-348, FIGURE 310-2	INTERFACE
PS-89675-2910	ELECTRO/MECH PERFORMANCE
SPECIFICATION	DESCRIPTION

CHG: ADD
DIMENSIONS
UPDATE FRAME

EC NO: URF2012-0303
2011/11/29
DRWN: JWIENER
CHKD: SSS
2011/11/29
APPR: JWIENER
2011/11/30

REV
A1

QUALITY
SYMBOLS

▽=0
▽=0

GENERAL TOLERANCES
(UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± .---	± .---
3 PLACES	± .---	± .---
2 PLACES	± .---	± .---
1 PLACE	± .---	± .---

ANGULAR ± 1/2°

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE
IN/MM

DRAWN BY DATE
EDC 1999/02/19

CHECKED BY DATE
DHG 1999/02/19

APPROVED BY DATE
1999/02/19

MATERIAL NO.
SEE TABLE

SIZE
C

SCALE
INCH

DESIGN UNITS
INCH

THIRD ANGLE
PROJECTION

TITLE
SMA JACK RECEPT 2 H FLNG
ACCEPTS .018 PIN

MOLEX INCORPORATED

DOCUMENT NO.
SD-73251-098

SHEET NO.
1 OF 1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX
INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION