

MATERIALS AND FINISHES

BODY, CRIMP TUBE BRASS
PLATED SEE TABLE











CENTER CONTACT BERYLLIUM COPPER
PLATED GOLD

INSULATOR, SPACER TEFLON

GASKET SILICONE RUBBER

LOCKWASHER PHOSPHOR BRONZE
PLATED SEE TABLE

JAMNUT BRASS
PLATED SEE TABLE

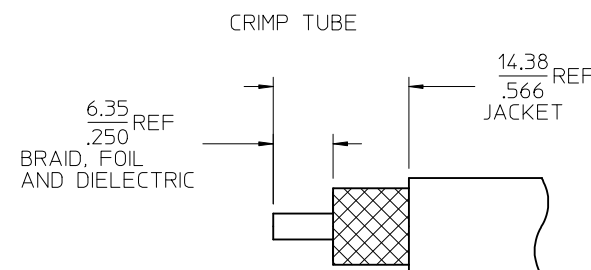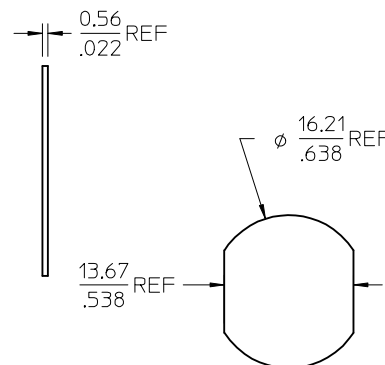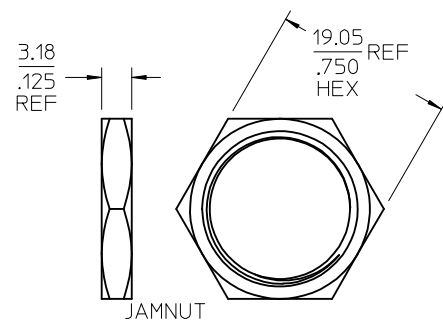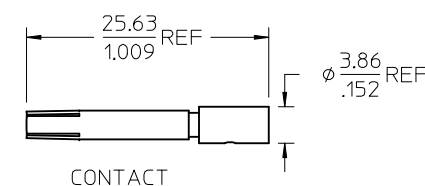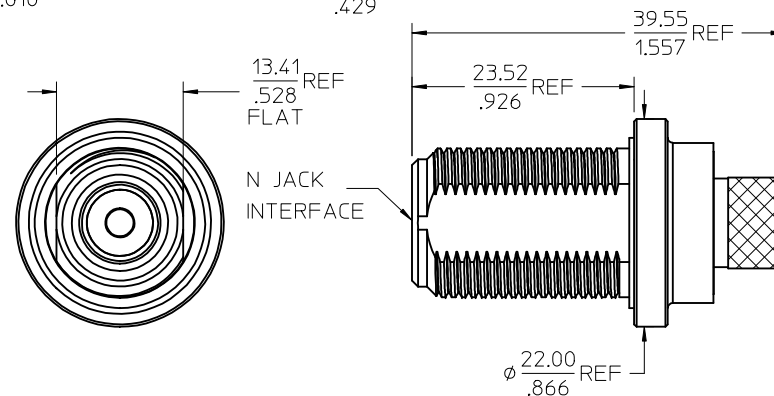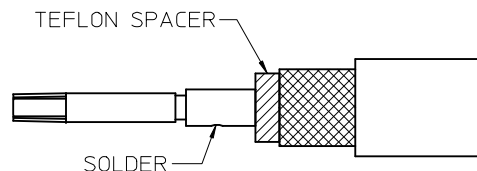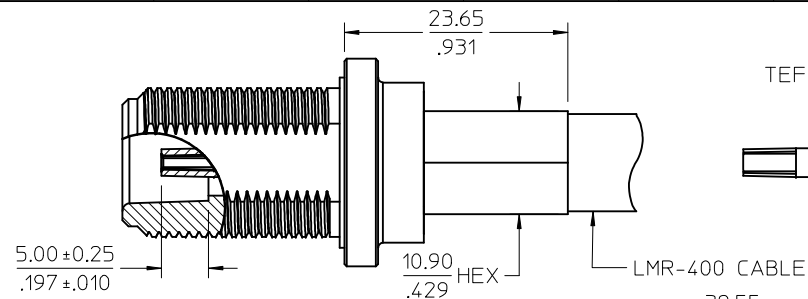

RECOMMENDED PANEL LAYOUT

MAX PANEL THK. 6.35(.250)

RECOMMENDED MOUNTING TORQUE

2.26 N-m(20 IN-LBS) MAX

RECOMMENDED STRIP DIMENSIONS

73276-0161	NICKEL
73276-0160	SILVER
PART NUMBER	PLATING

MIL-STD-348A, FIG. 304-2	INTERFACE
SPECIFICATION	DESCRIPTION

CHG: UPDATED
VIEW OF REVISED
REAR BODY.
EC NO: URF2013-0717
DRWN: JWIENER 2013/06/24
CHKD: SSS 2013/06/24
APPR: JWIENER 2013/06/25

QUALITY
SYMBOLS
▽=0
▽=0

GENERAL TOLERANCES
(UNLESS SPECIFIED)
4 PLACES ± --- ± ---
3 PLACES ± --- ± ---
2 PLACES ± --- ± ---
1 PLACE ± --- ± ---
ANGULAR ± 2 °
DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE
MM/IN
DRAWN BY DATE
EDC 1998/05/06
CHECKED BY DATE
NB J 1998/05/14
APPROVED BY DATE
JWIENER 2010/05/03
MATERIAL NO.
SEE TABLE
SIZE C

SCALE
DESIGN UNITS
METRIC
THIRD ANGLE
PROJECTION
TITLE
N JACK STR BKHD LMR 400
CABLE, EWR-3217,50 OHMS
N-JC
MOLEX INCORPORATED
DOCUMENT NO.
SD-73276-016
SHEET NO.
1 OF 1
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX
INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION