




MATERIALS AND FINISHES

BODY, COUPLING NUT, CAP, OUTER CONTACT BRASS
PLATED NICKEL




CENTER CONTACT BRASS
PLATED GOLD

INSULATOR TEFLON

GASKET SILICONE RUBBER

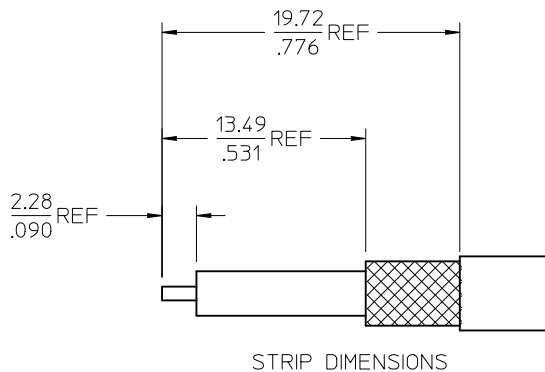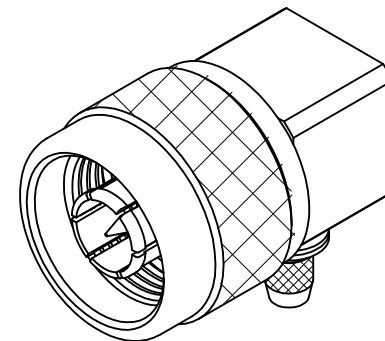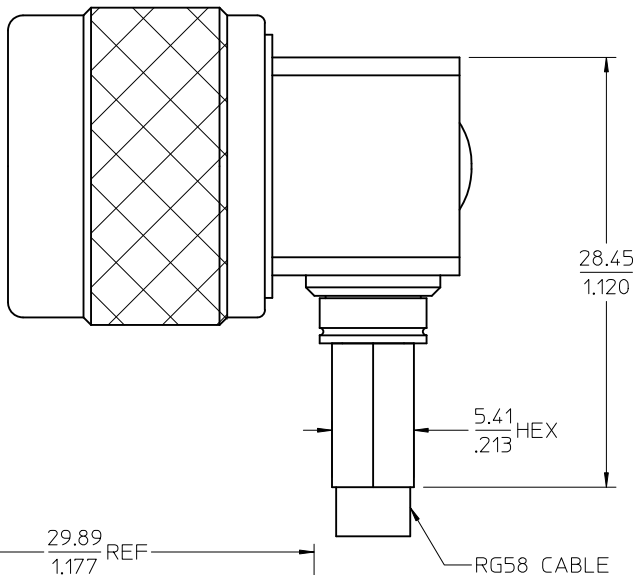

N PLUG
INTERFACE

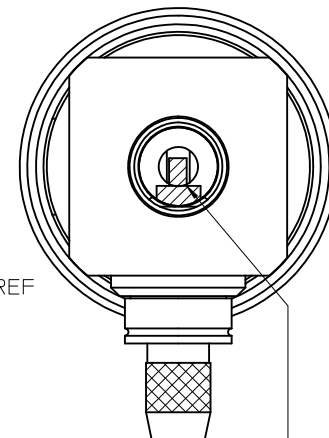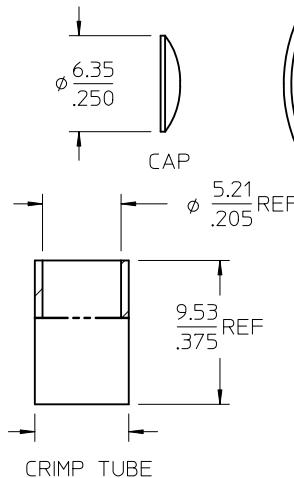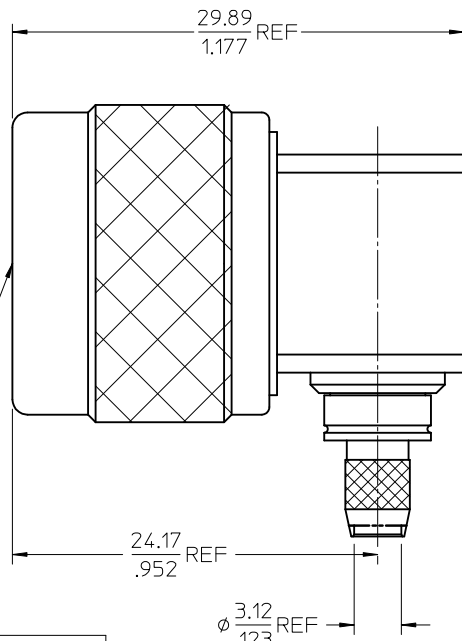

CABLE DIELECTRIC MUST
COME CLOSE TO THE CENTER
CONTACT AS POSSIBLE

73276-0191	ONE PER BAG
73276-0190	STANDARD
PART NO.	PACKAGING

MIL-STD-348A, FIG. 304.1	INTERFACE
SPECIFICATION	DESCRIPTION

CHG: ADD -0191 EC NO: URF2011-0614 DRWN:JWIENER 2011/04/18 CHKD:SSS 2011/04/18 APPR:JWIENER 2011/04/20 REV B1	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED) mm INCH 4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± --- ± --- 1 PLACE ± --- ± --- ANGULAR ± 2 ° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	DIMENSION STYLE MM/IN DRAWN BY DATE JM 2005/08/24 CHECKED BY DATE JM 2005/08/24 APPROVED BY DATE JDW 2005/08/24 MATERIAL NO. SEE TABLE SIZE C	SCALE DESIGN UNITS METRIC TITLE N PLUG, R/A FOR RG58 CABLE, 50 OHMS EWR-2894, N-PC/RA MOLEX INCORPORATED SD-73276-019	SHEET NO. 1 OF 1