

MATERIALS AND FINISHES:



BODY & SMA COUPLING NUT ST. STEEL
PASSIVATED

CENTER CONTACT BERYLLIUM COPPER
PLATED GOLD

INSULATOR TEFLON

SNAP RING BERYLLIUM COPPER

GASKET SILICONE RUBBER

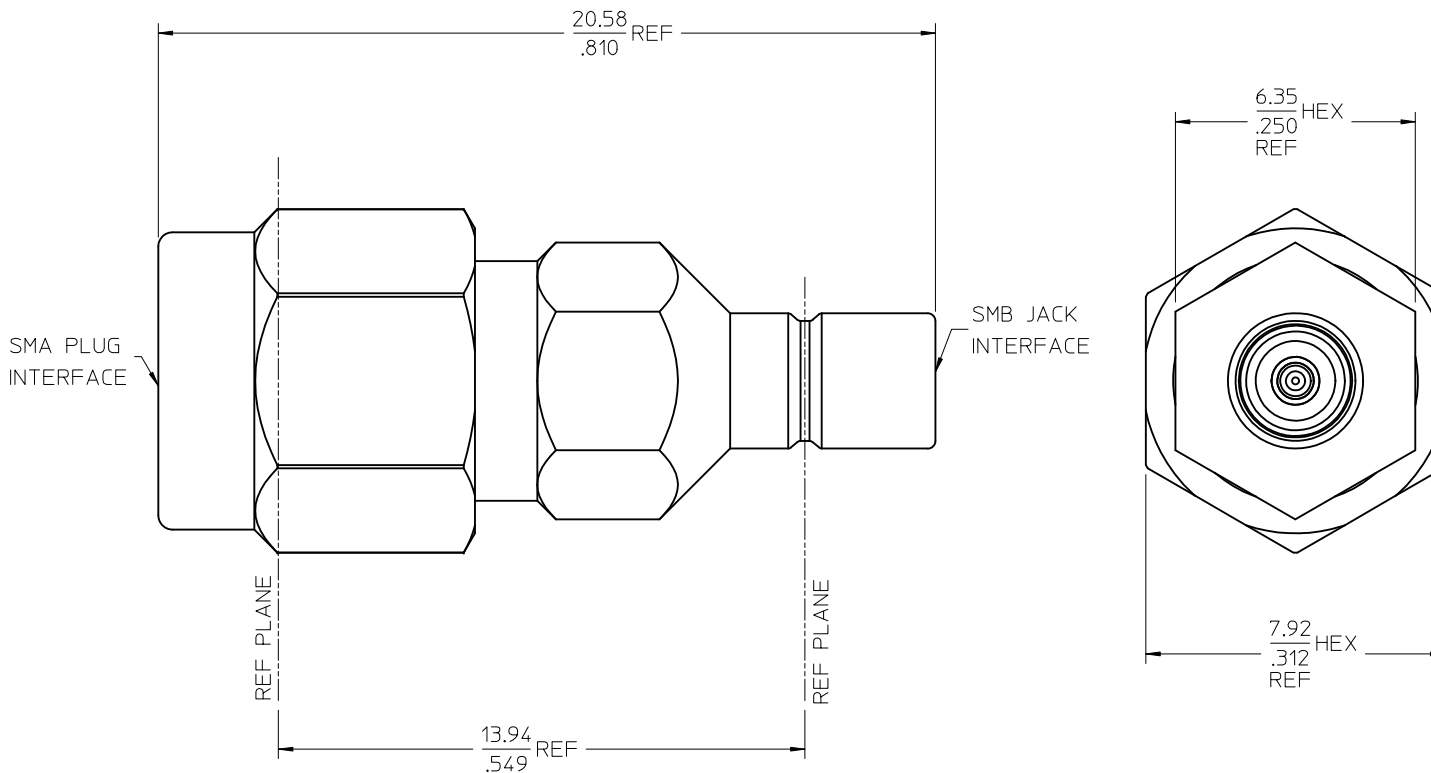

MIL-STD-348A, FIG. 311.1	SMB INTERFACE
MIL-STD-348A, FIG. 310.1	SMA INTERFACE
PS-89675-2730	ELECTRO/MECH PERFORM.
SPECIFICATION	DESCRIPTION

73386-0192	TRAY
73386-0191	ONE PER BAG
PART NO.	PACKAGING

CHG: ADD -0191 EC NO: URF2011-0572 DRWN:JWIENER 2011/04/01 CHKD:SSS 2011/04/01 APPR:JWIENER 2011/04/01 A2	DESCRIPTION REV	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION
				mm	INCH	DRAWN BY GMH	DATE 2001/06/18	TITLE SMA PLUG/SMB JACK ADAPTER, 50 OHMS BSA-AD/SMAP/SMBJ	
			4 PLACES	± ---	± ---	CHECKED BY TEF	DATE 2001/06/18	 MOLEX INCORPORATED	
			3 PLACES	± ---	± ---	APPROVED BY XXX	DATE 0000/00/00		
			2 PLACES	± ---	± ---	MATERIAL NO. 733860192			
1 PLACE	± ---	± ---	ANGULAR ± 2 °		SHEET NO. 1 OF 1				
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SIZE C		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				