
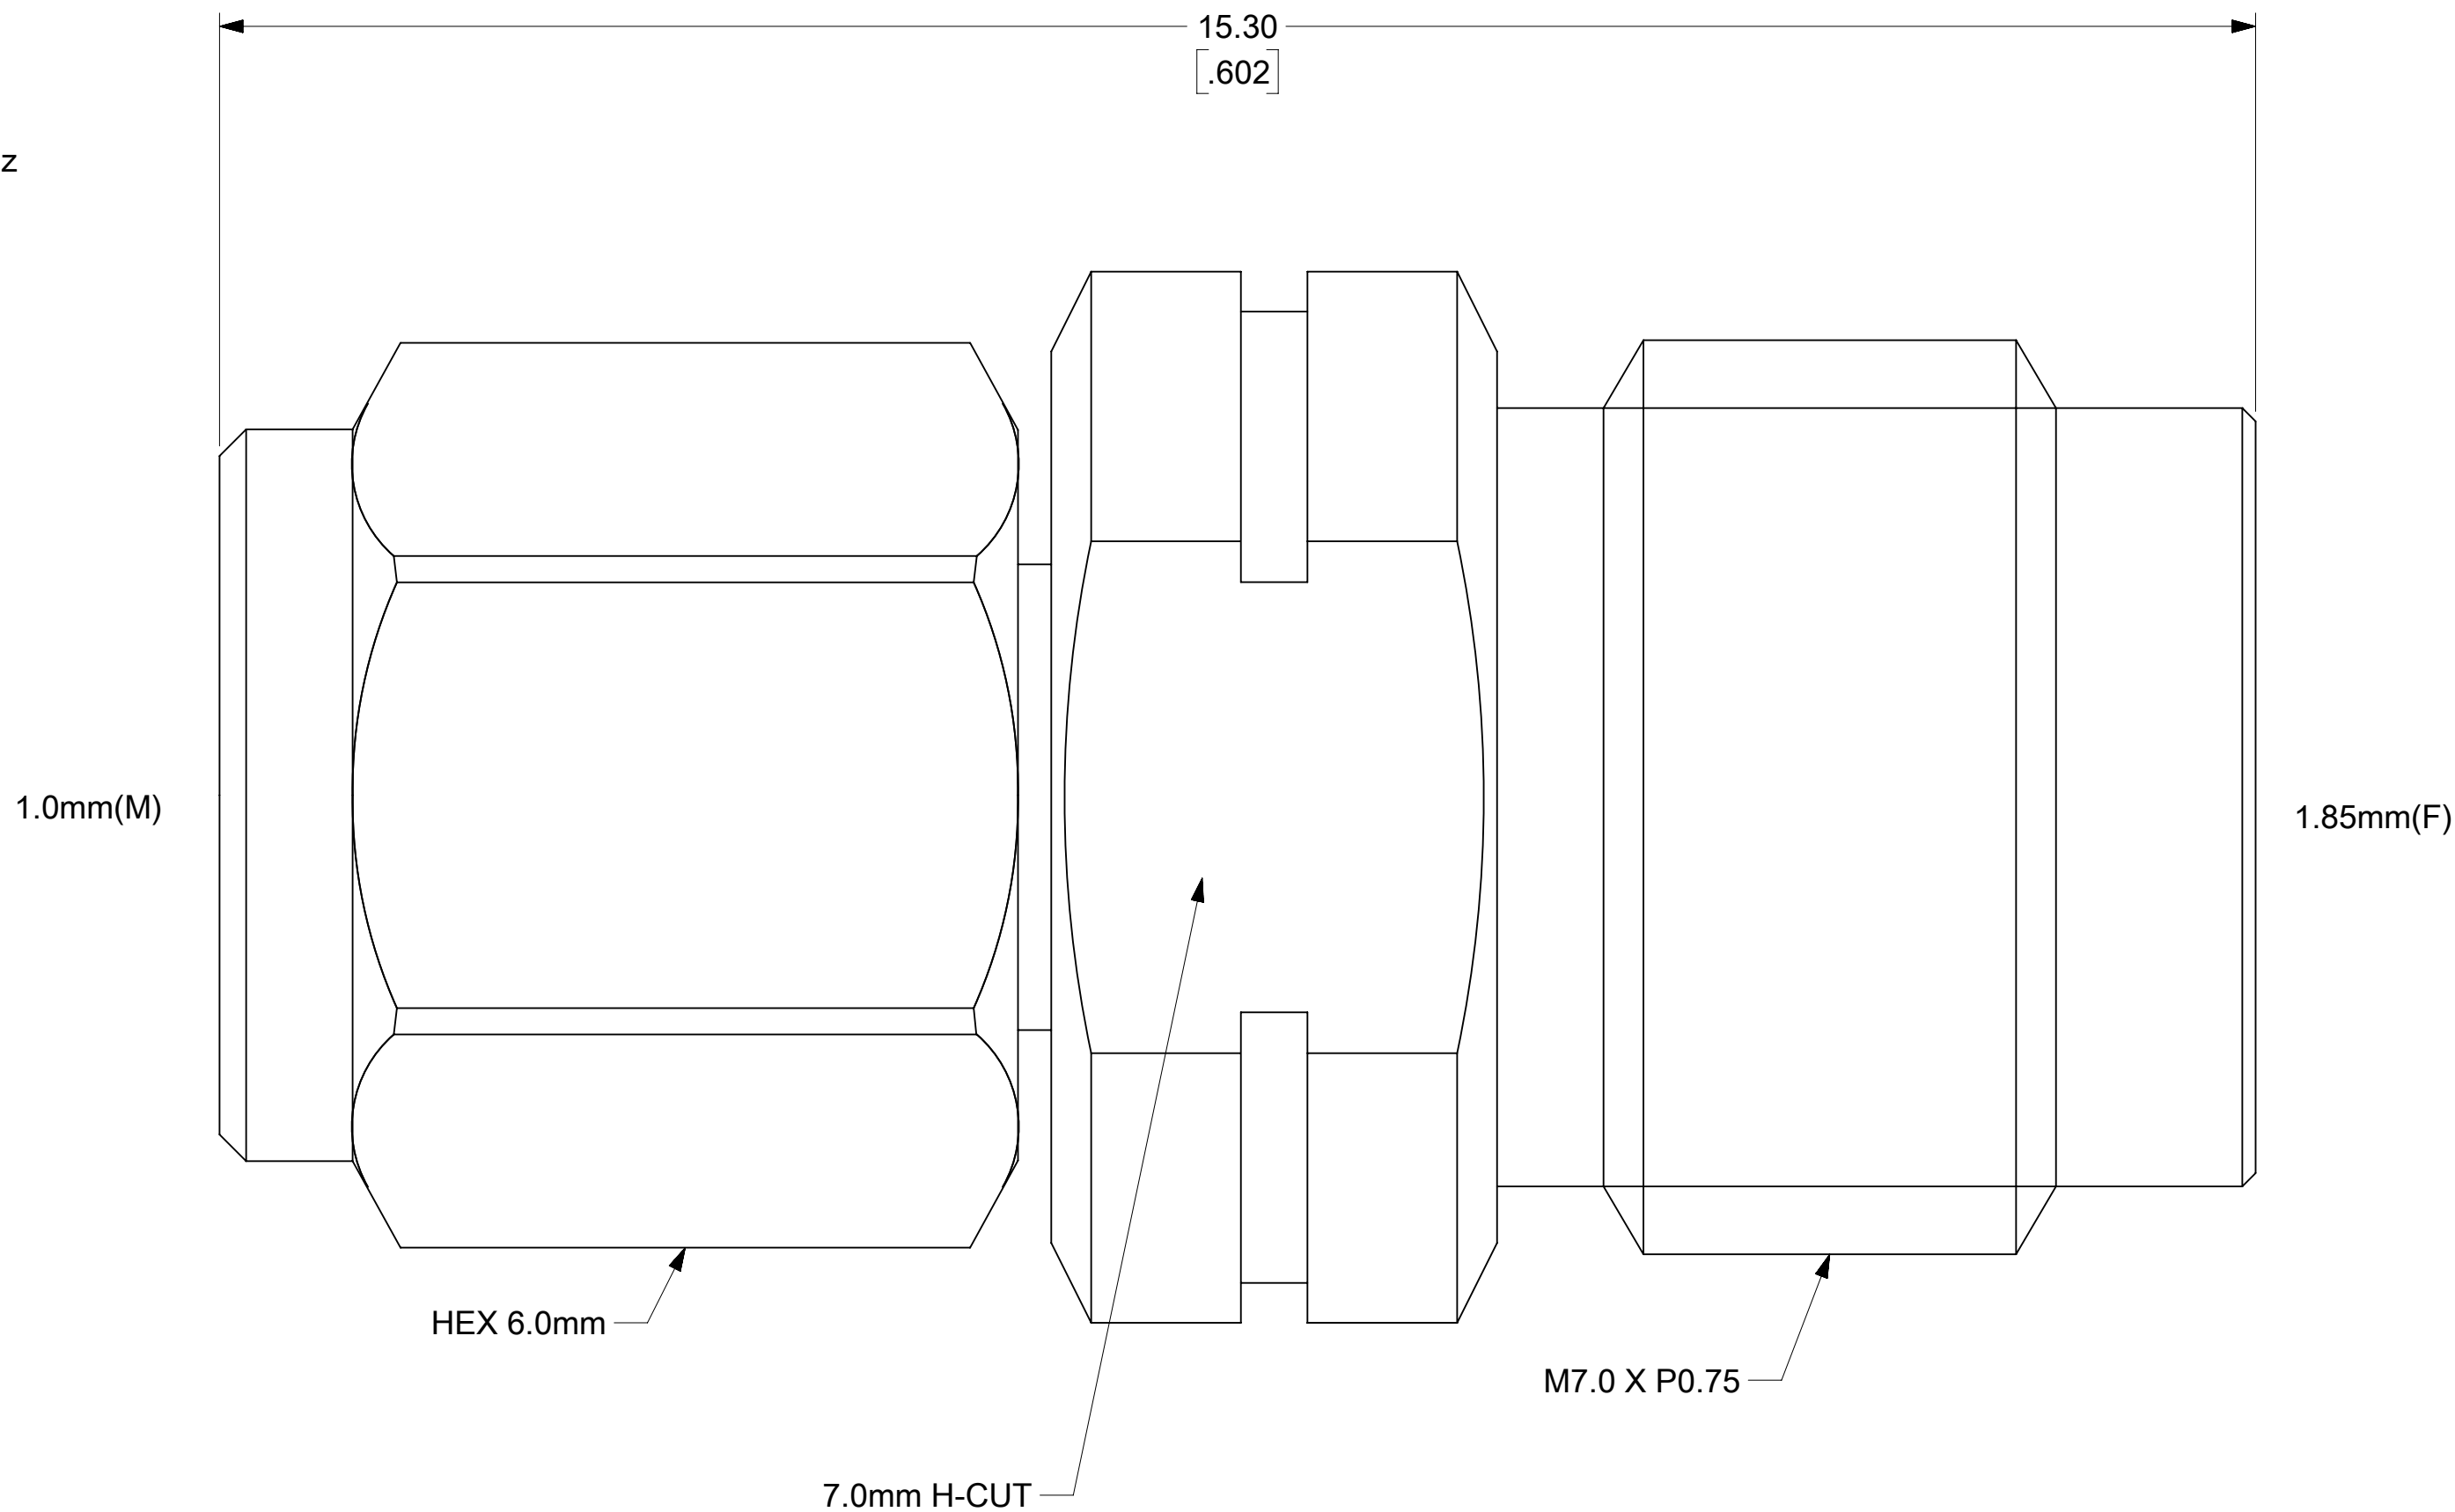


1. MATERIALS:
CONTACT: BERYLLIUM COPPER
ALL OTHER METAL PARTS: STAINLESS STEEL
INSULATOR: ULTEM1000
2. FINISH:
CONTACT: GOLD
ALL OTHER METAL PARTS: PASSIVATED
3. MECHANICAL/ENVIRONMENTAL:
DURABILITY: 500 CYCLES
TEMP RANGE: -65°C to +165°C
4. ELECTRICAL:
IMPEDANCE: 50Ω
FREQUENCY RANGE: DC to 67GHz
VSWR(dB): 1.2: 1(-20.8dB)



FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
	DIMENSION UNITS		SCALE		CURRENT REV DESC: UPDATED TO GENERAL MARKET			molex		
	MM/INCH		NTS							
	GENERAL TOLERANCES (UNLESS SPECIFIED)							1.0MM PLUG TO 1.85MM JACK ADAPTER		
	MM	INCH								
DIVISIONAL SYMBOLS	$\frac{F}{A} = 0$			EC NO: 735515			PRODUCT CUSTOMER DRAWING			
	$\frac{F}{C} = 0$			DRWN: KTAGAN 2023/01/18						
	$\frac{F}{E} = 0$			CHK'D: LMEIER 2023/01/18						
	2 PLACES		±	±	APPR: JBORRELLI 2023/01/19			DOCUMENT NUMBER 733862220 DOC TYPE PSD DOC PART 000 REVISION A1		
	1 PLACE		±	±	INITIAL REVISION:					
	0 PLACES		±	±	DRWN: VISHNM2 2022/11/22					
	ANGULAR TOL		±	°	APPR: LMEIER 2022/12/15					
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			THIRD ANGLE PROJECTION		DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER		SHEET NUMBER
					C-SIZE	73386	733862220			1 OF 1