

- NOTES:
1. MATERIALS:

CONTACT: BRASS

ALL OTHER METAL PARTS: STAINLESS STEEL

INSULATOR: ULTEM1000
2. FINISH:

CONTACT: GOLD


ALL OTHER METAL PARTS: PASSIVATED
3. MECHANICAL/ENVIRONMENTAL:

DURABILITY: 500 CYCLES
4. ELECTRICAL:

IMPEDANCE: 50Ω

FREQUENCY RANGE: DC to 50GHz

VSWR(dB): 1.15:1 (-23.12dB)

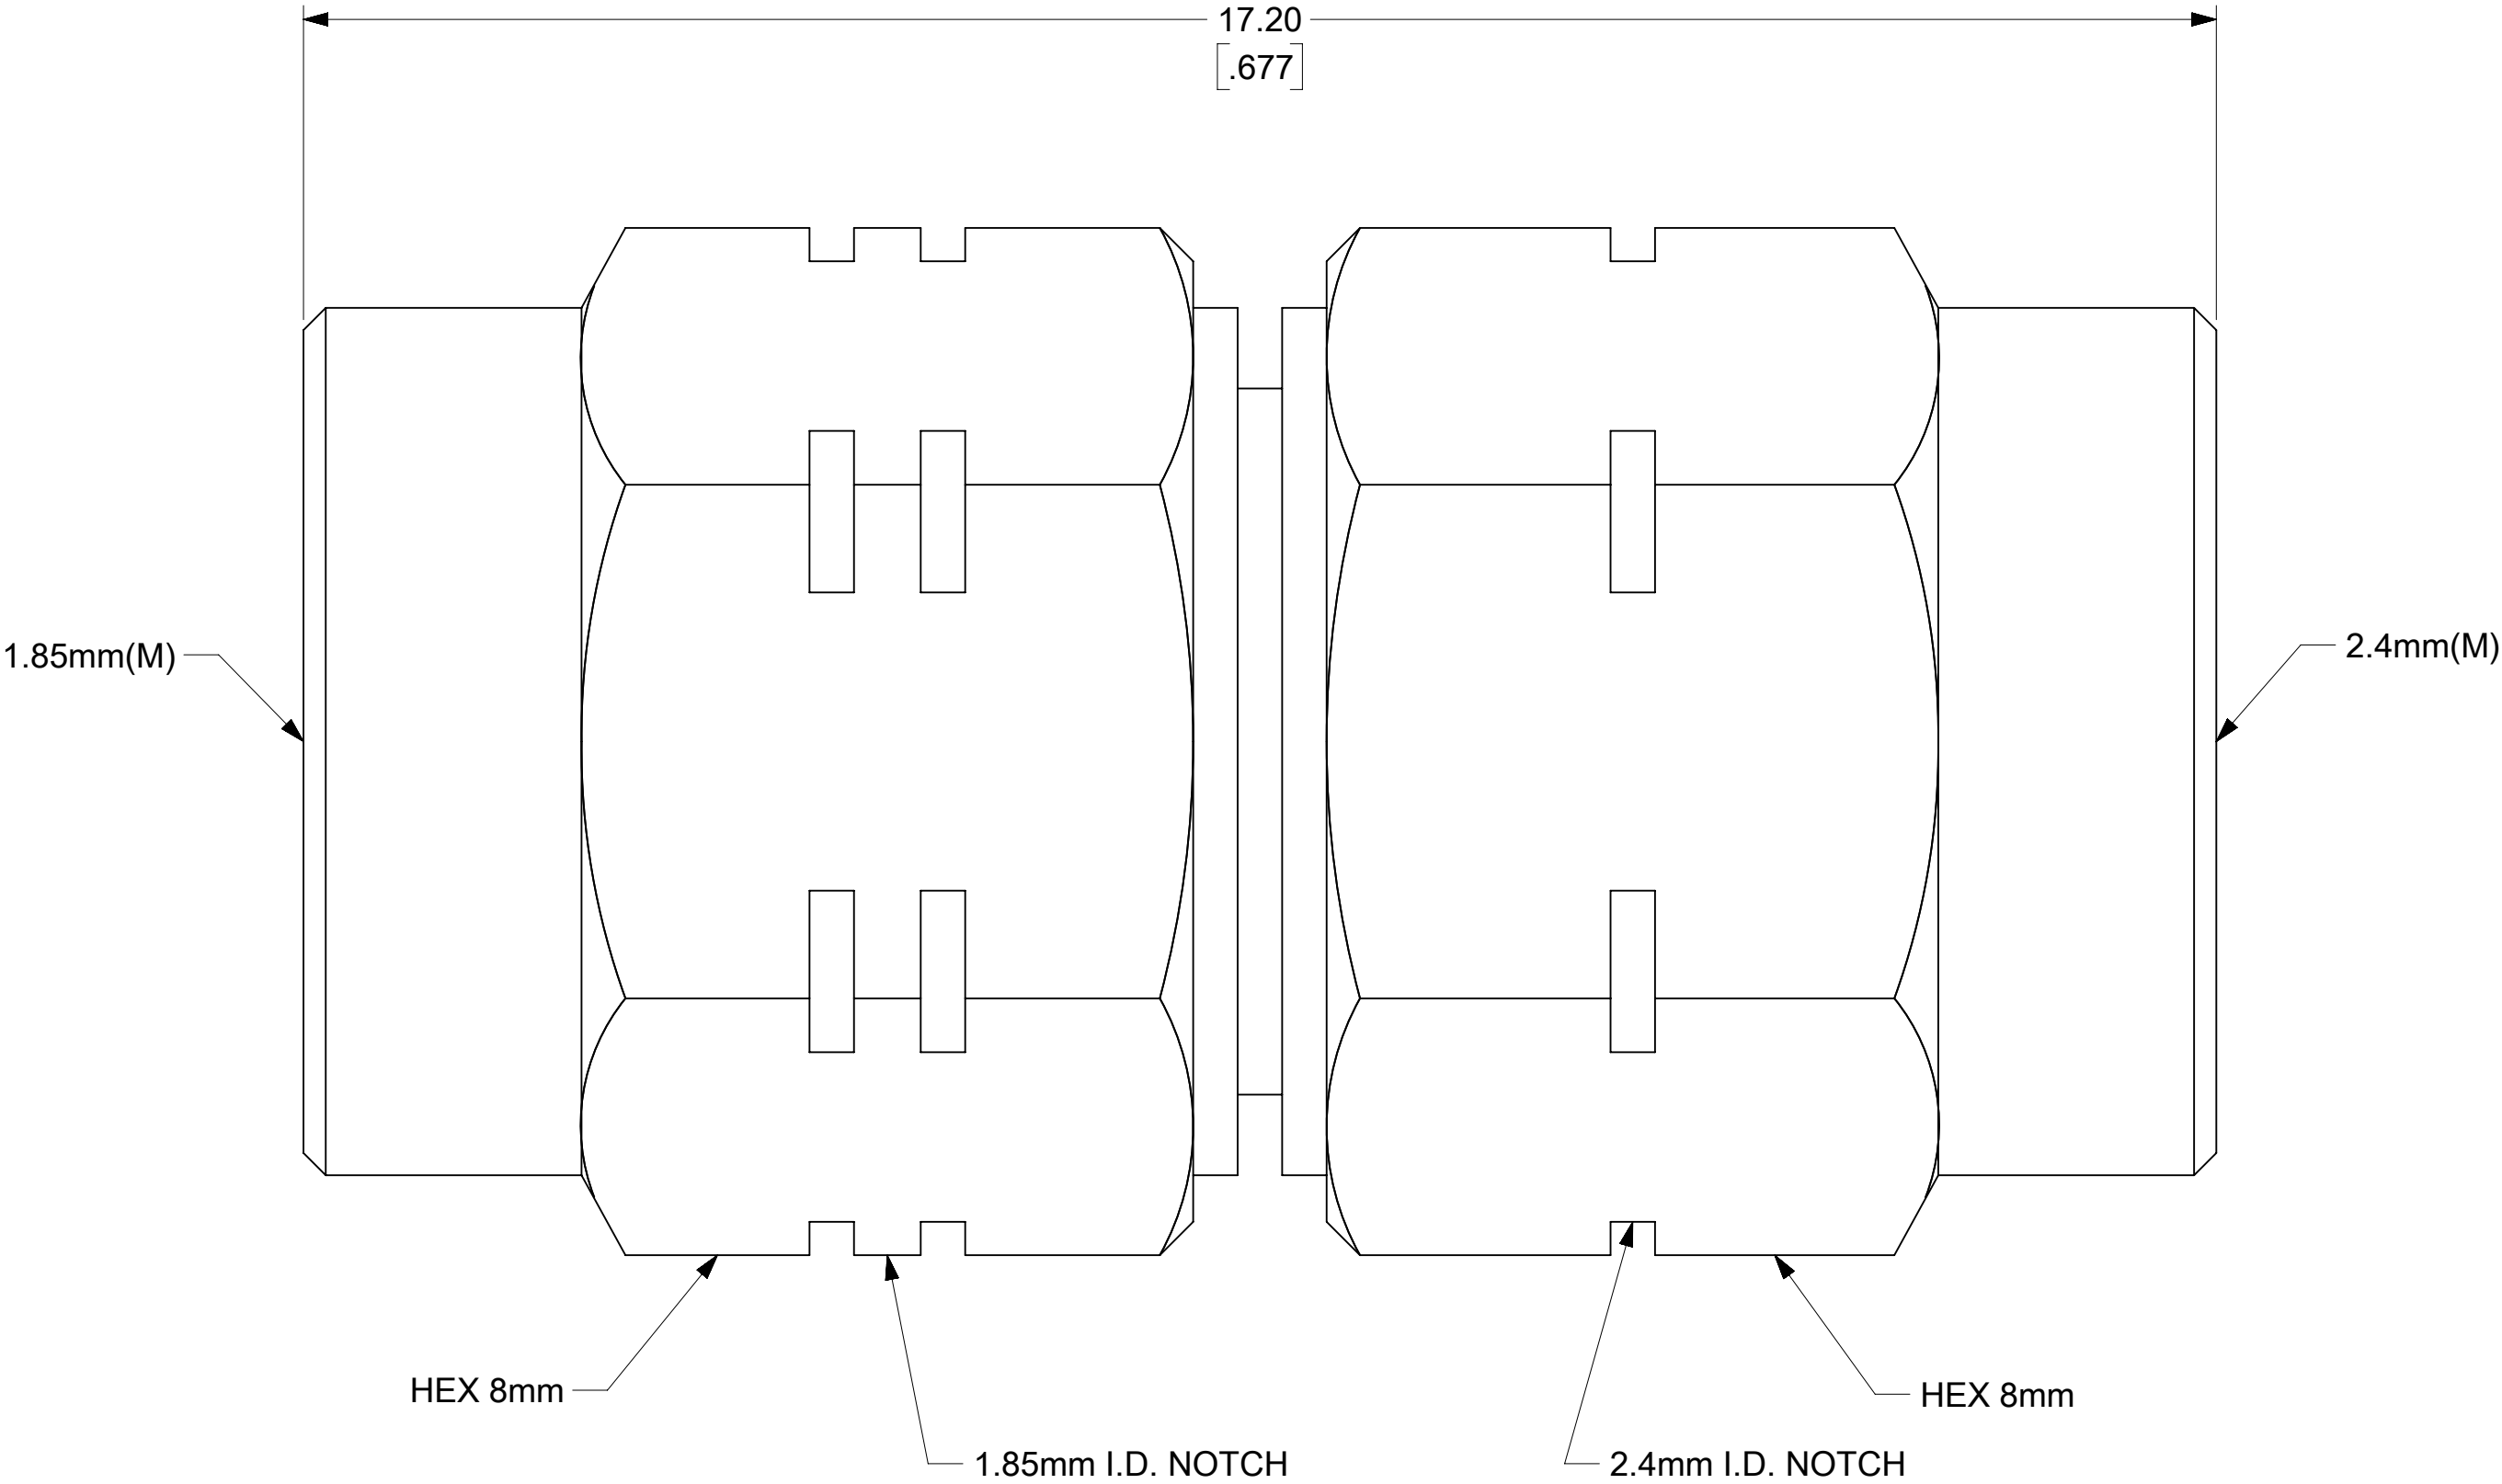

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																
= 0 = 0 = 0	DIMENSION UNITS		SCALE		CURRENT REV DESC: UPDATED TO GENERAL MARKET				molex 1.85MM PLUG TO 2.4MM PLUG ADAPTER								
	MM/INCH		NTS														
	GENERAL TOLERANCES (UNLESS SPECIFIED)																
		MM		INCH													
	DIVISIONAL SYMBOLS	4 PLACES		±	±	EC NO: 735515 DRWN: KTAGAN CHK'D: LMEIER APPR: JBORRELLI				2023/01/18 2023/01/18 2023/01/19							
3 PLACES		±	±														
2 PLACES		±	±														
1 PLACE		±	±	INITIAL REVISION: DRWN: VISHNM2 APPR: LMEIER				PRODUCT CUSTOMER DRAWING									
0 PLACES		±	±														
ANGULAR TOL		±	°														
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES		DOCUMENT NUMBER		DOC TYPE		DOC PART		REVISION	
						C-SIZE		73386		733862270		PSD		000		A1	