


NOTES:

1. MATERIALS:
CONTACT: BERYLLIUM COPPER
ALL OTHER METAL PARTS: STAINLESS STEEL
INSULATOR: ULTEM1000
2. FINISH:
CONTACT: GOLD
ALL OTHER METAL PARTS: PASSIVATED
3. MECHANICAL/ENVIRONMENTAL:
DURABILITY: 500 CYCLES
4. ELECTRICAL:
IMPEDANCE: 50Ω
FREQUENCY RANGE: DC to 40GHz
VSWR(dB): 1.15:1 (-23.12dB)

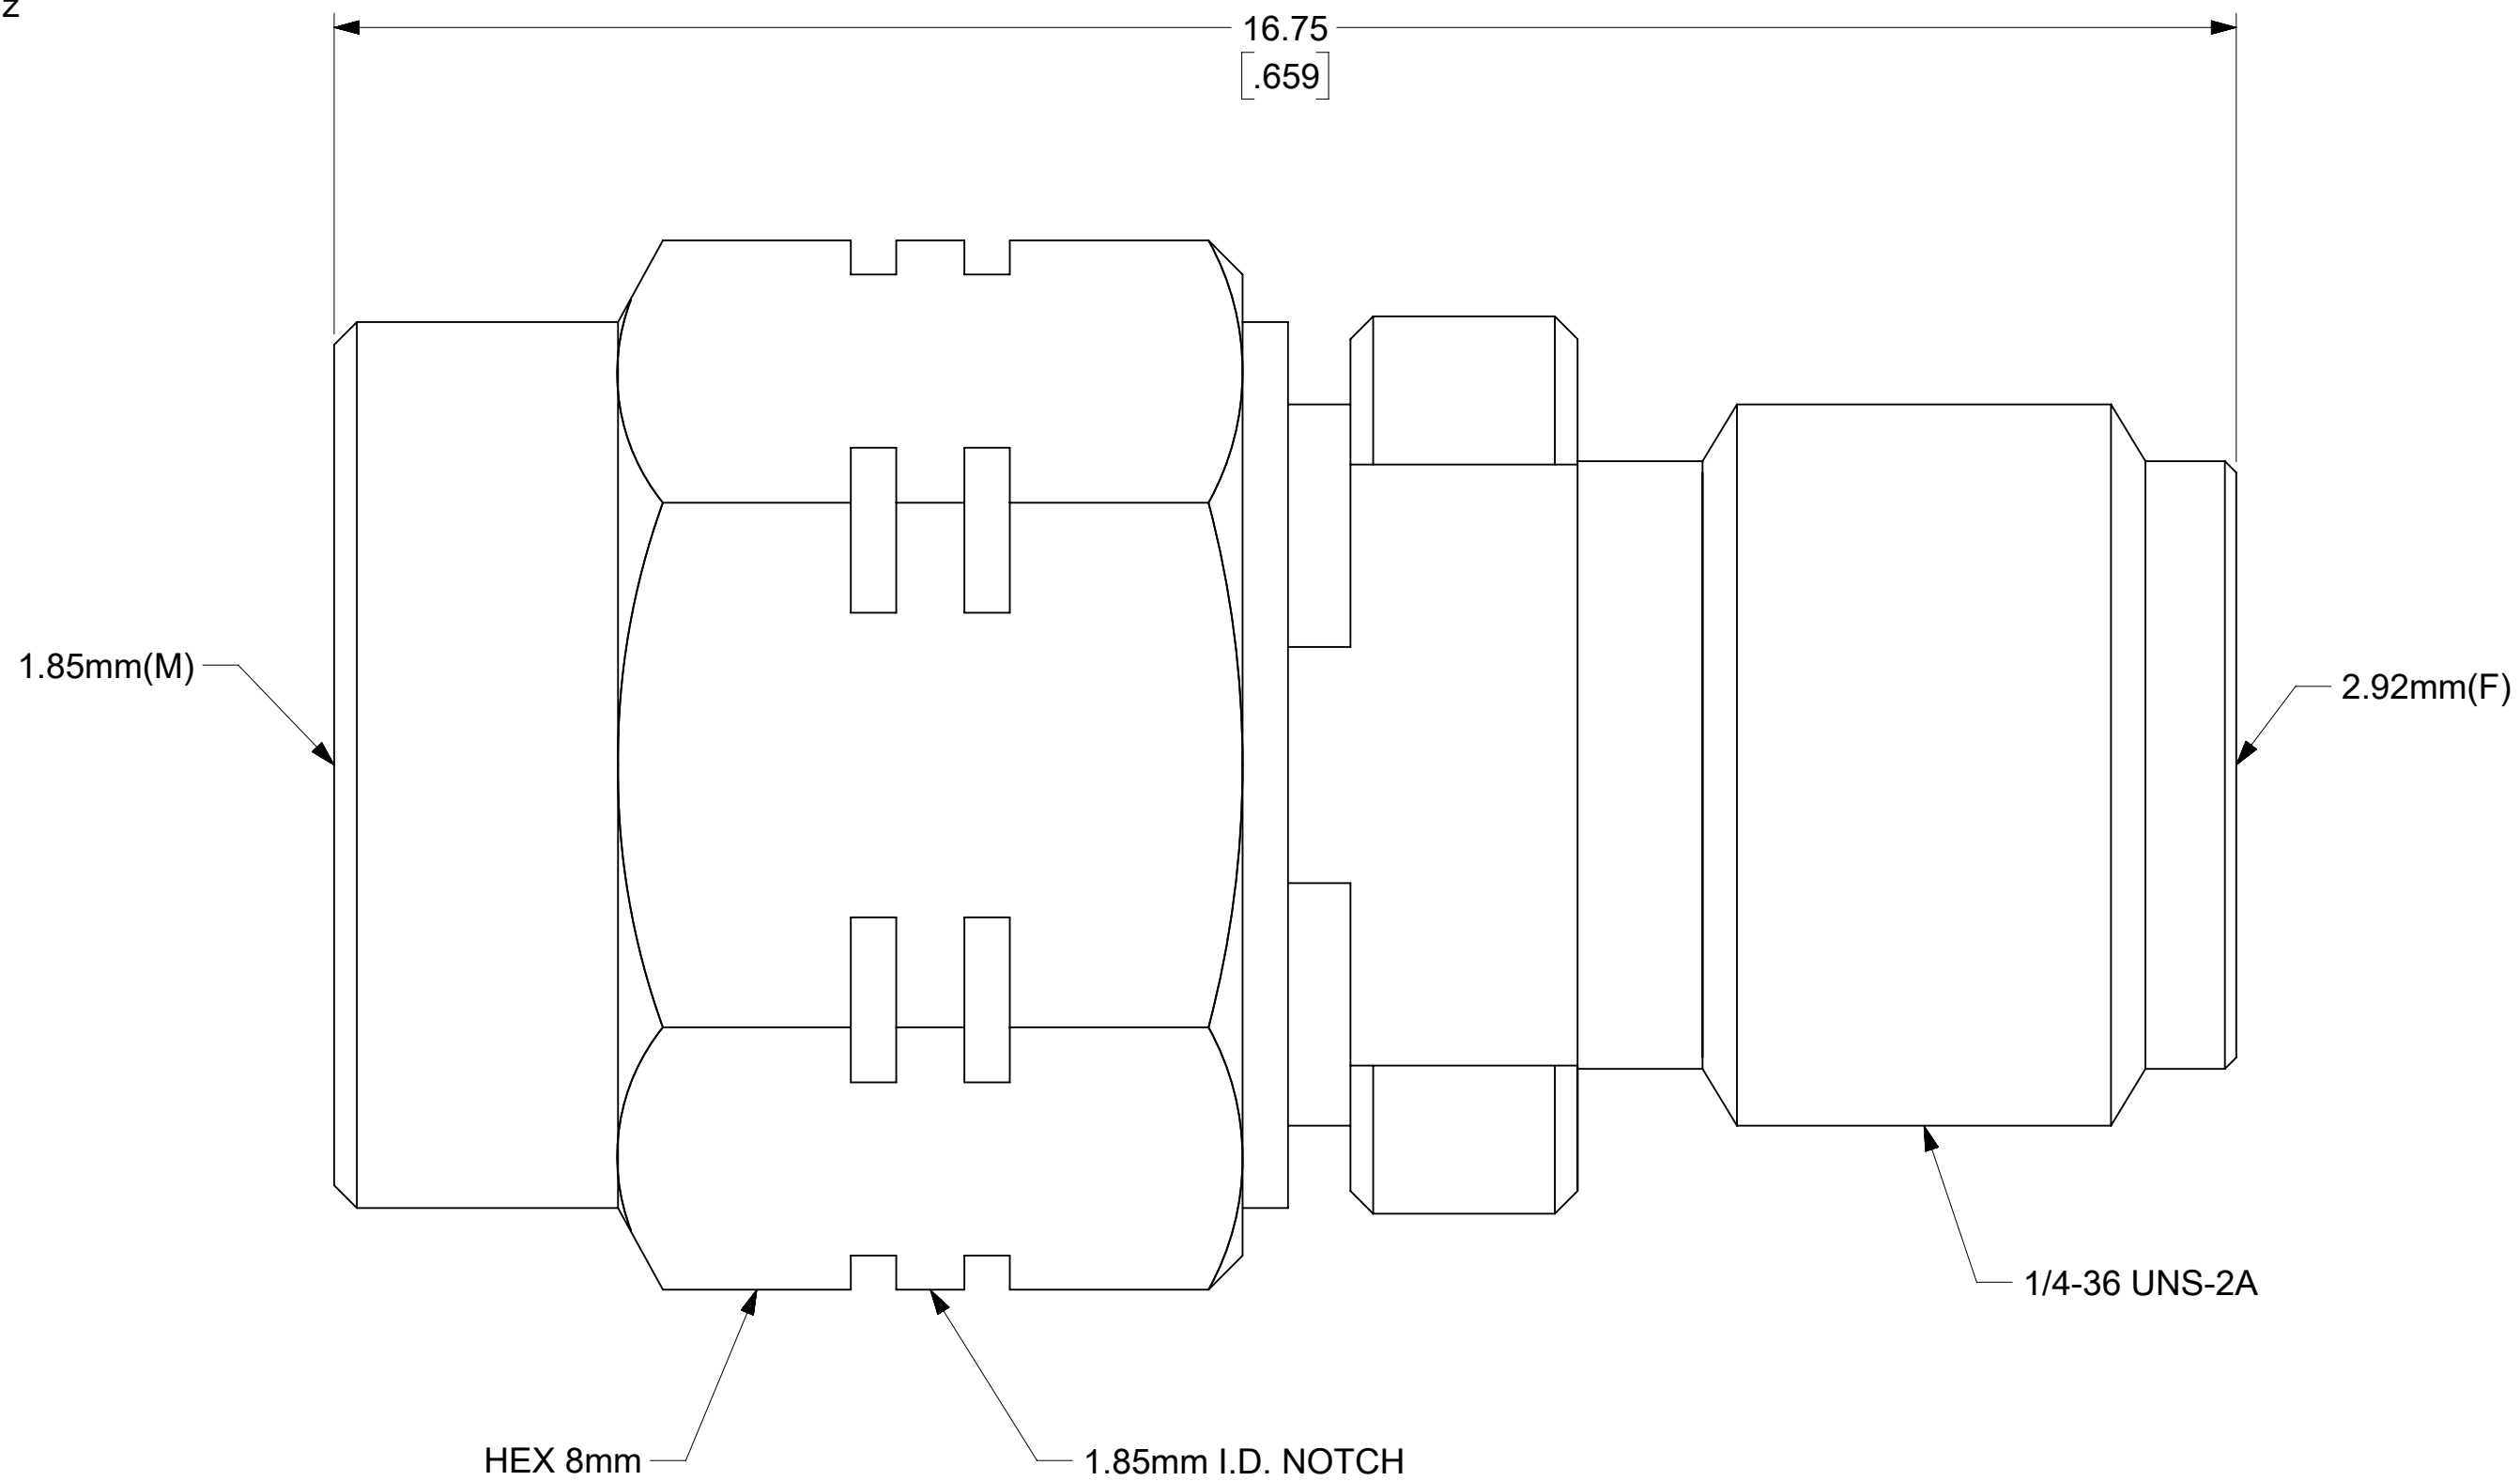

FUNCTIONAL SYMBOLS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											
DIVISIONAL SYMBOLS		DIMENSION UNITS		SCALE		CURRENT REV DESC: UPDATED TO GENERAL MARKET			molex				
		MM/INCH		NTS									
		GENERAL TOLERANCES (UNLESS SPECIFIED)											
			MM	INCH					1.85MM PLUG TO 2.92MM JACK ADAPTER				
		4 PLACES		±	±								
		3 PLACES		±	±								
2 PLACES		±	±	EC NO: 735515			PRODUCT CUSTOMER DRAWING						
1 PLACE		±	±	DRWN: KTAGAN 2023/01/18									
0 PLACES		±	±	CHK'D: LMEIER 2023/01/18									
DIVISIONAL SYMBOLS		ANGULAR TOL		±	°	APPR: JBORRELLI 2023/01/19			DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION
		INITIAL REVISION:		2022/11/24			733862300		PSD	000	A1		
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER		SHEET NUMBER		
				C-SIZE	73386	733862300			1 OF 1				