


NOTES:

1. MATERIALS:
CONTACT: BERYLLIUM COPPER
ALL OTHER METAL PARTS: STAINLESS STEEL
INSULATOR: ULTEM1000
2. FINISH:
CONTACT: GOLD
ALL OTHER METAL PARTS: PASSIVATED
3. MECHANICAL/ENVIRONMENTAL:
DURABILITY: 500 CYCLES
4. ELECTRICAL:
IMPEDANCE: 50Ω
FREQUENCY RANGE: DC to 40GHz
VSWR(dB): 1.25:1 (-19.08dB)

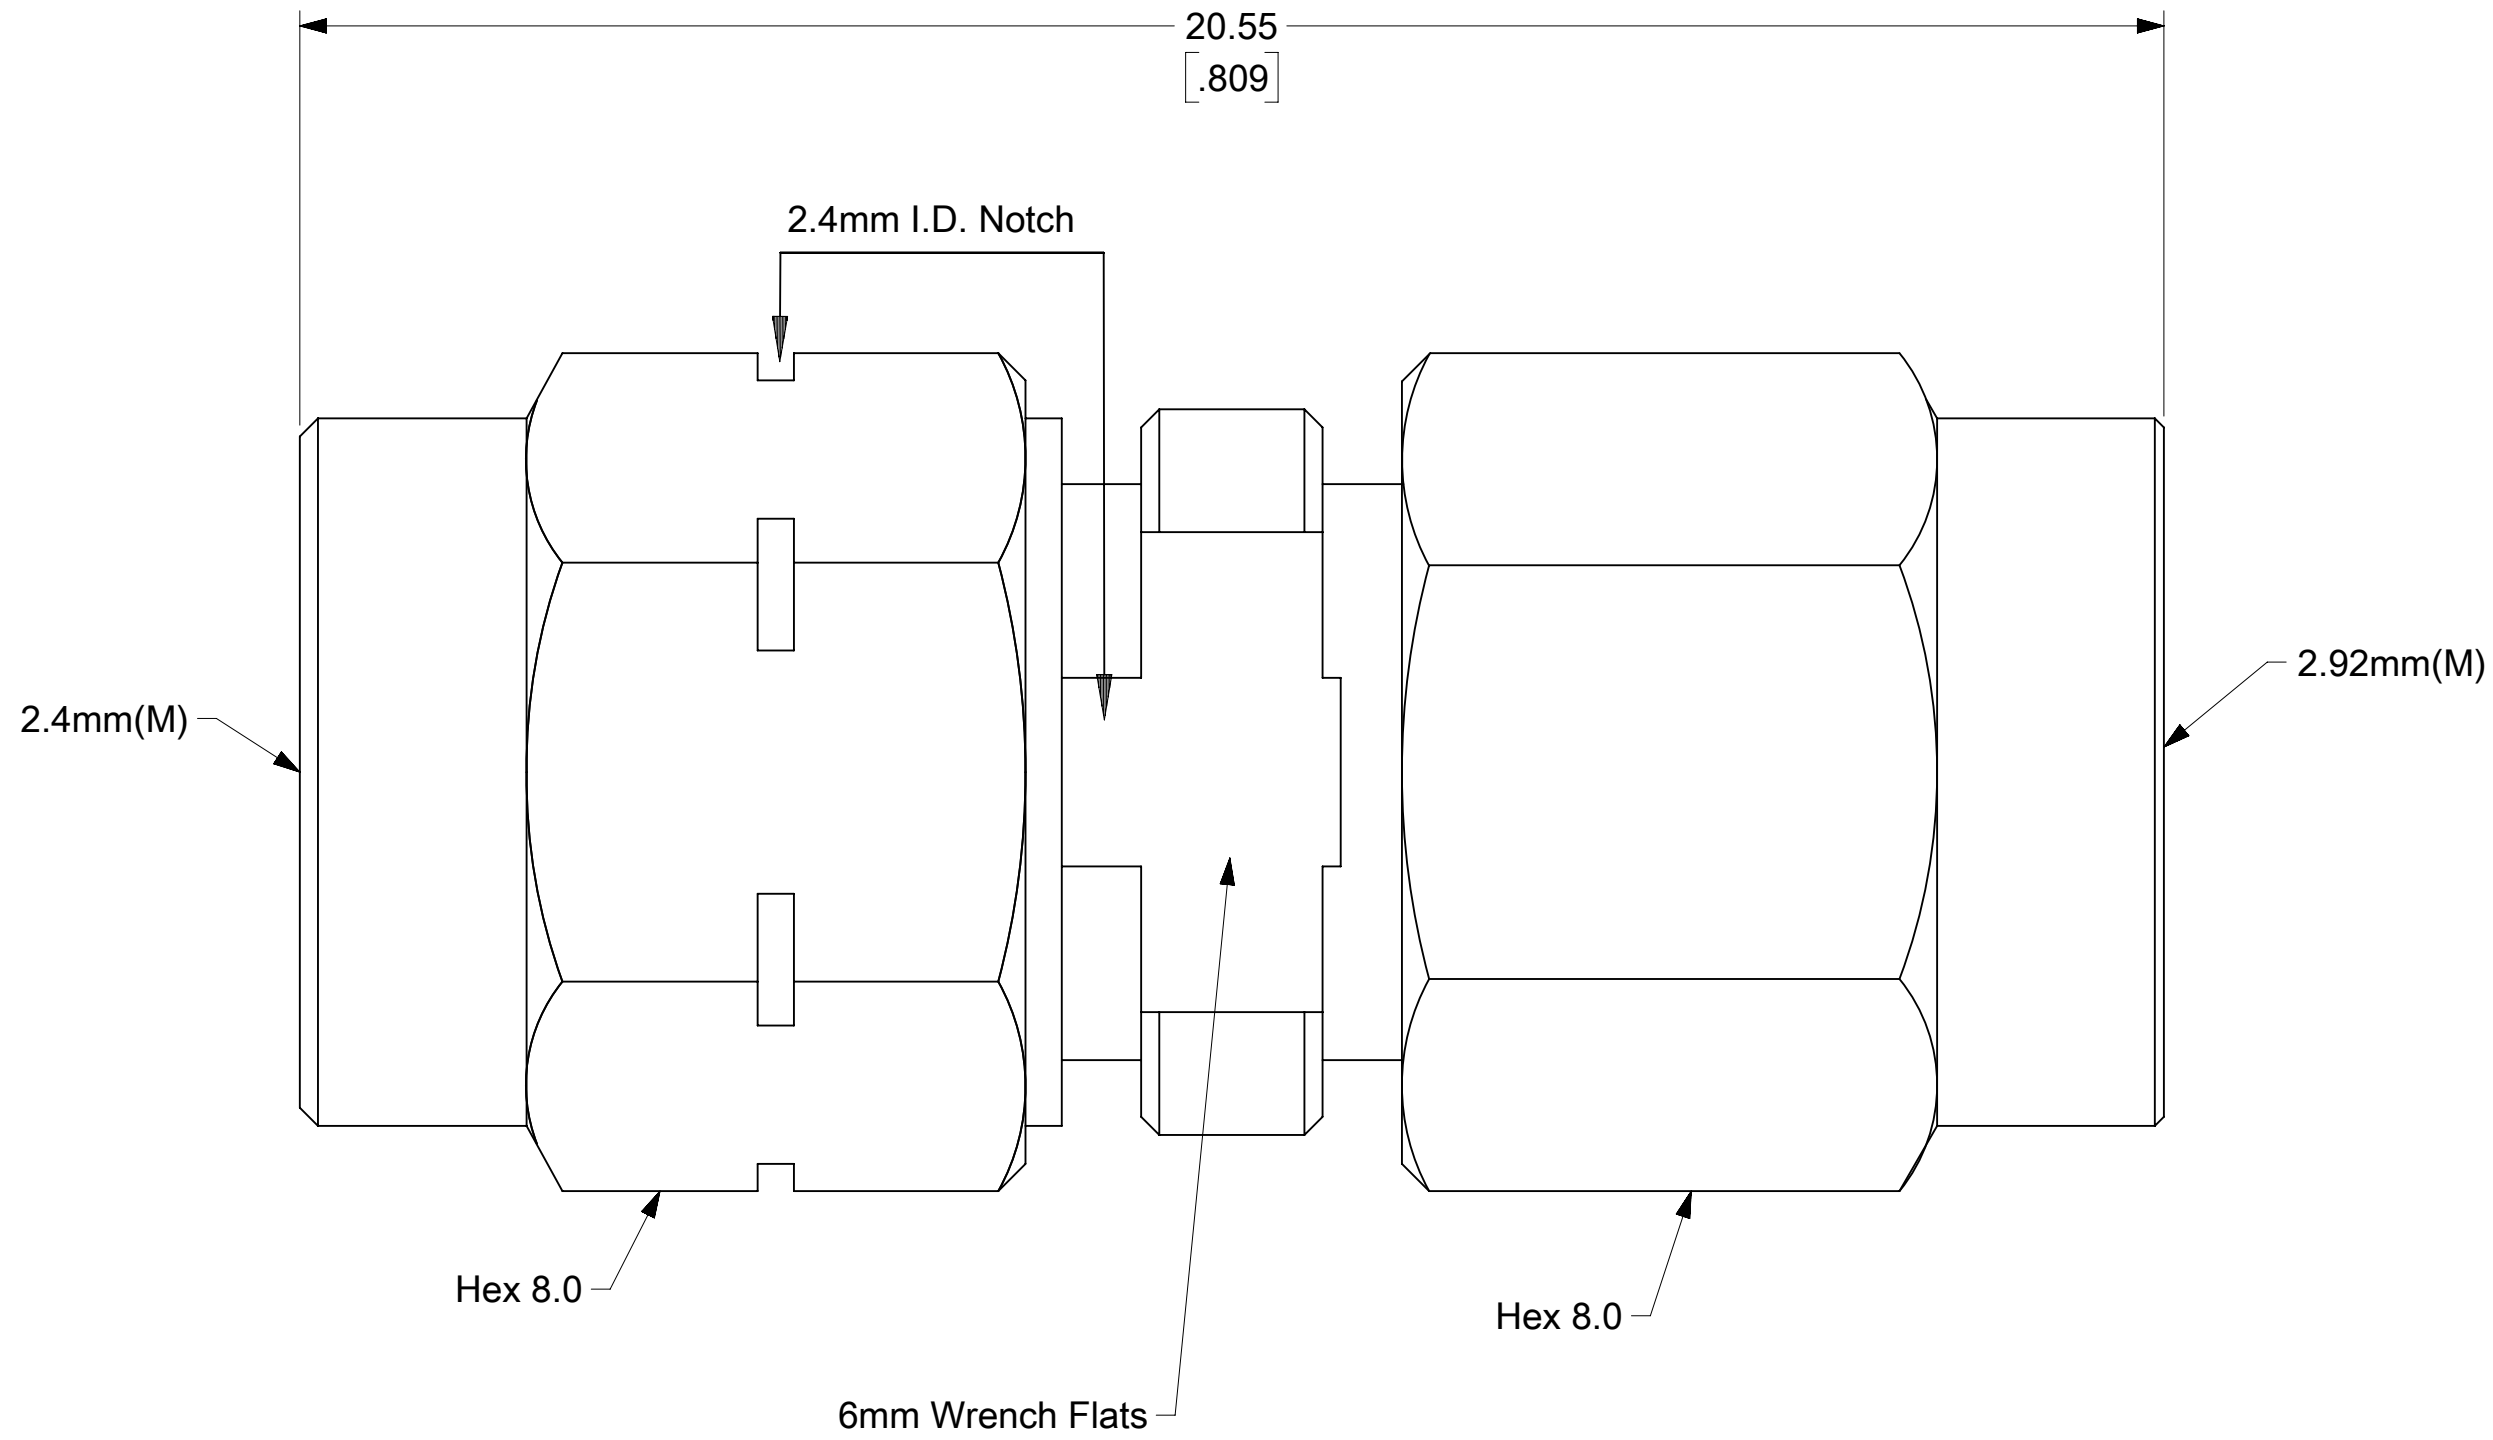

FUNCTIONAL SYMBOLS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											
F_A = 0 F_E = 0 F_D = 0 DIVISIONAL SYMBOLS		DIMENSION UNITS		SCALE		CURRENT REV DESC: INITIAL RELEASE				molex 2.4MM PLUG TO 2.92MM PLUG ADAPTER			
		MM/INCH		NTS		EC NO: 731858 DRWN: PKH2022/11/24 CHK'D: JBORRELLI2022/12/14 APPR: LMEIER2022/12/15 INITIAL REVISION: DRWN: PKH2022/11/24 APPR: LMEIER2022/12/15							
		GENERAL TOLERANCES (UNLESS SPECIFIED)											
			MM	INCH									
		4 PLACES	±	±									
		3 PLACES	±	±									
		2 PLACES	±	±									
DIVISIONAL SYMBOLS		1 PLACE	±	±					PRODUCT CUSTOMER DRAWING				
		0 PLACES	±	±					DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION
						733862350		PSD	000	A			
		ANGULAR TOL		±	°								
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER		SHEET NUMBER		
						C-SIZE	73386	733862350			1 OF 1		

DOCUMENT STATUS	P1	RELEASE DATE	2022/12/15	18:06:07
-----------------	----	--------------	------------	----------