



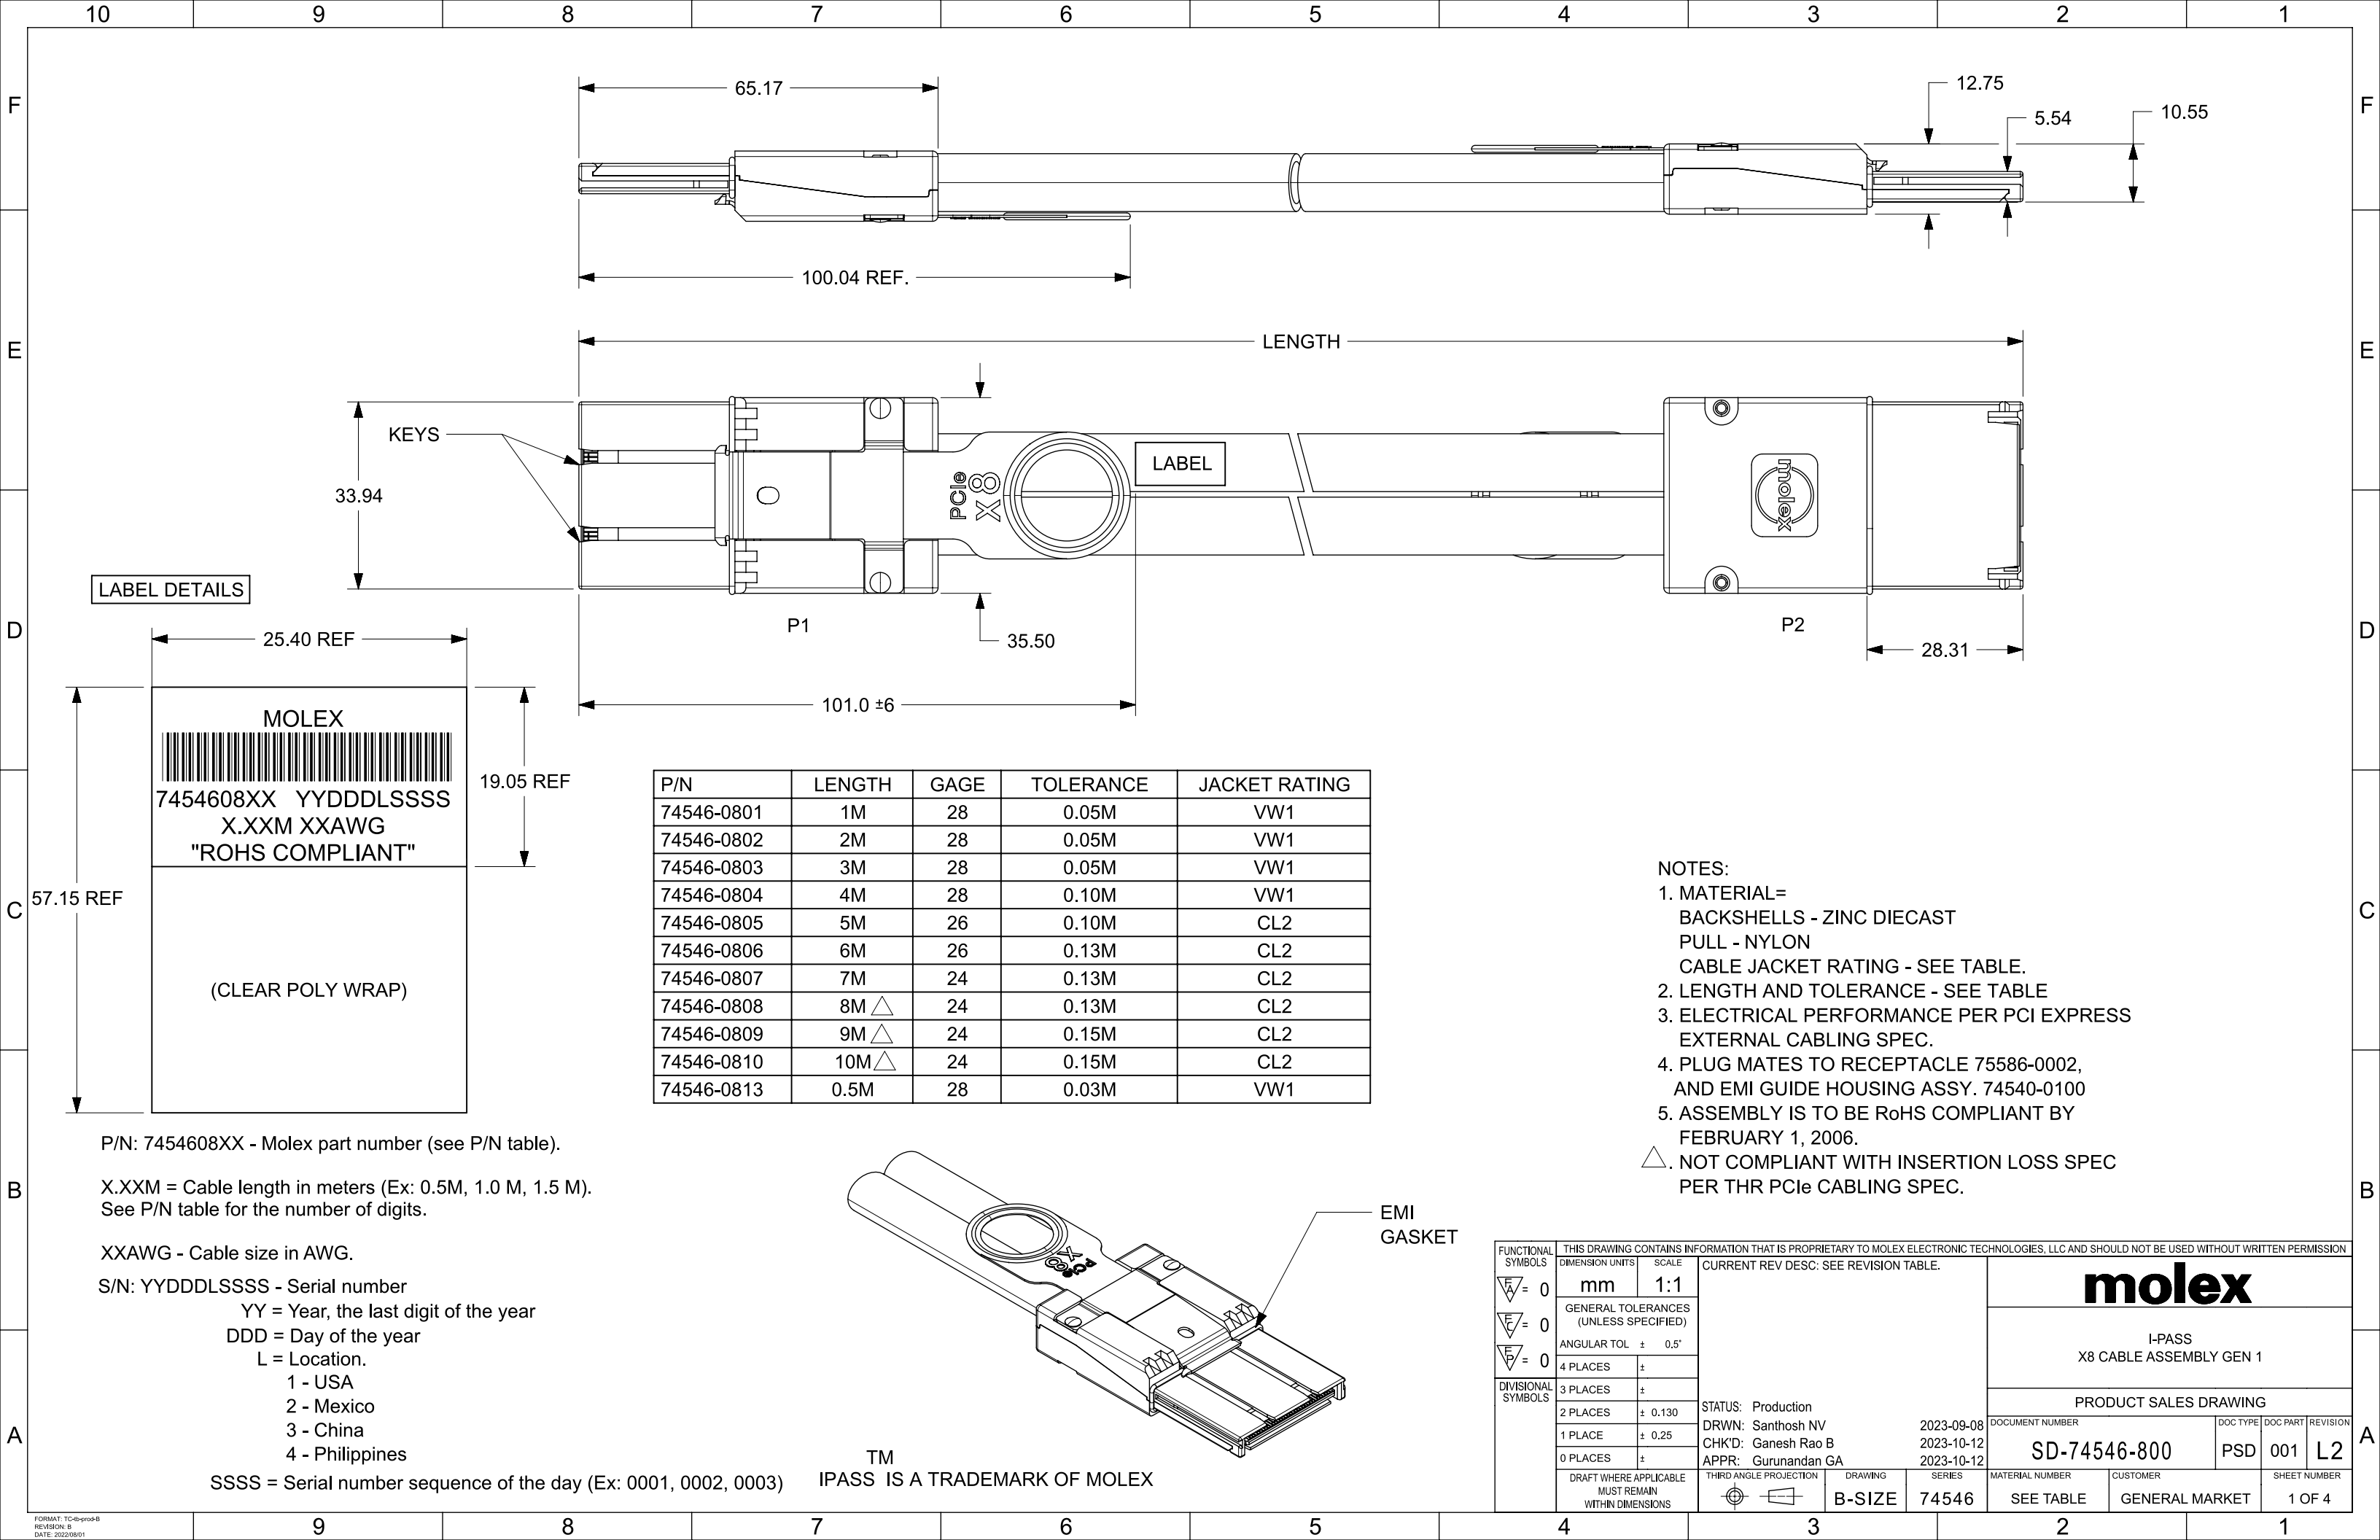

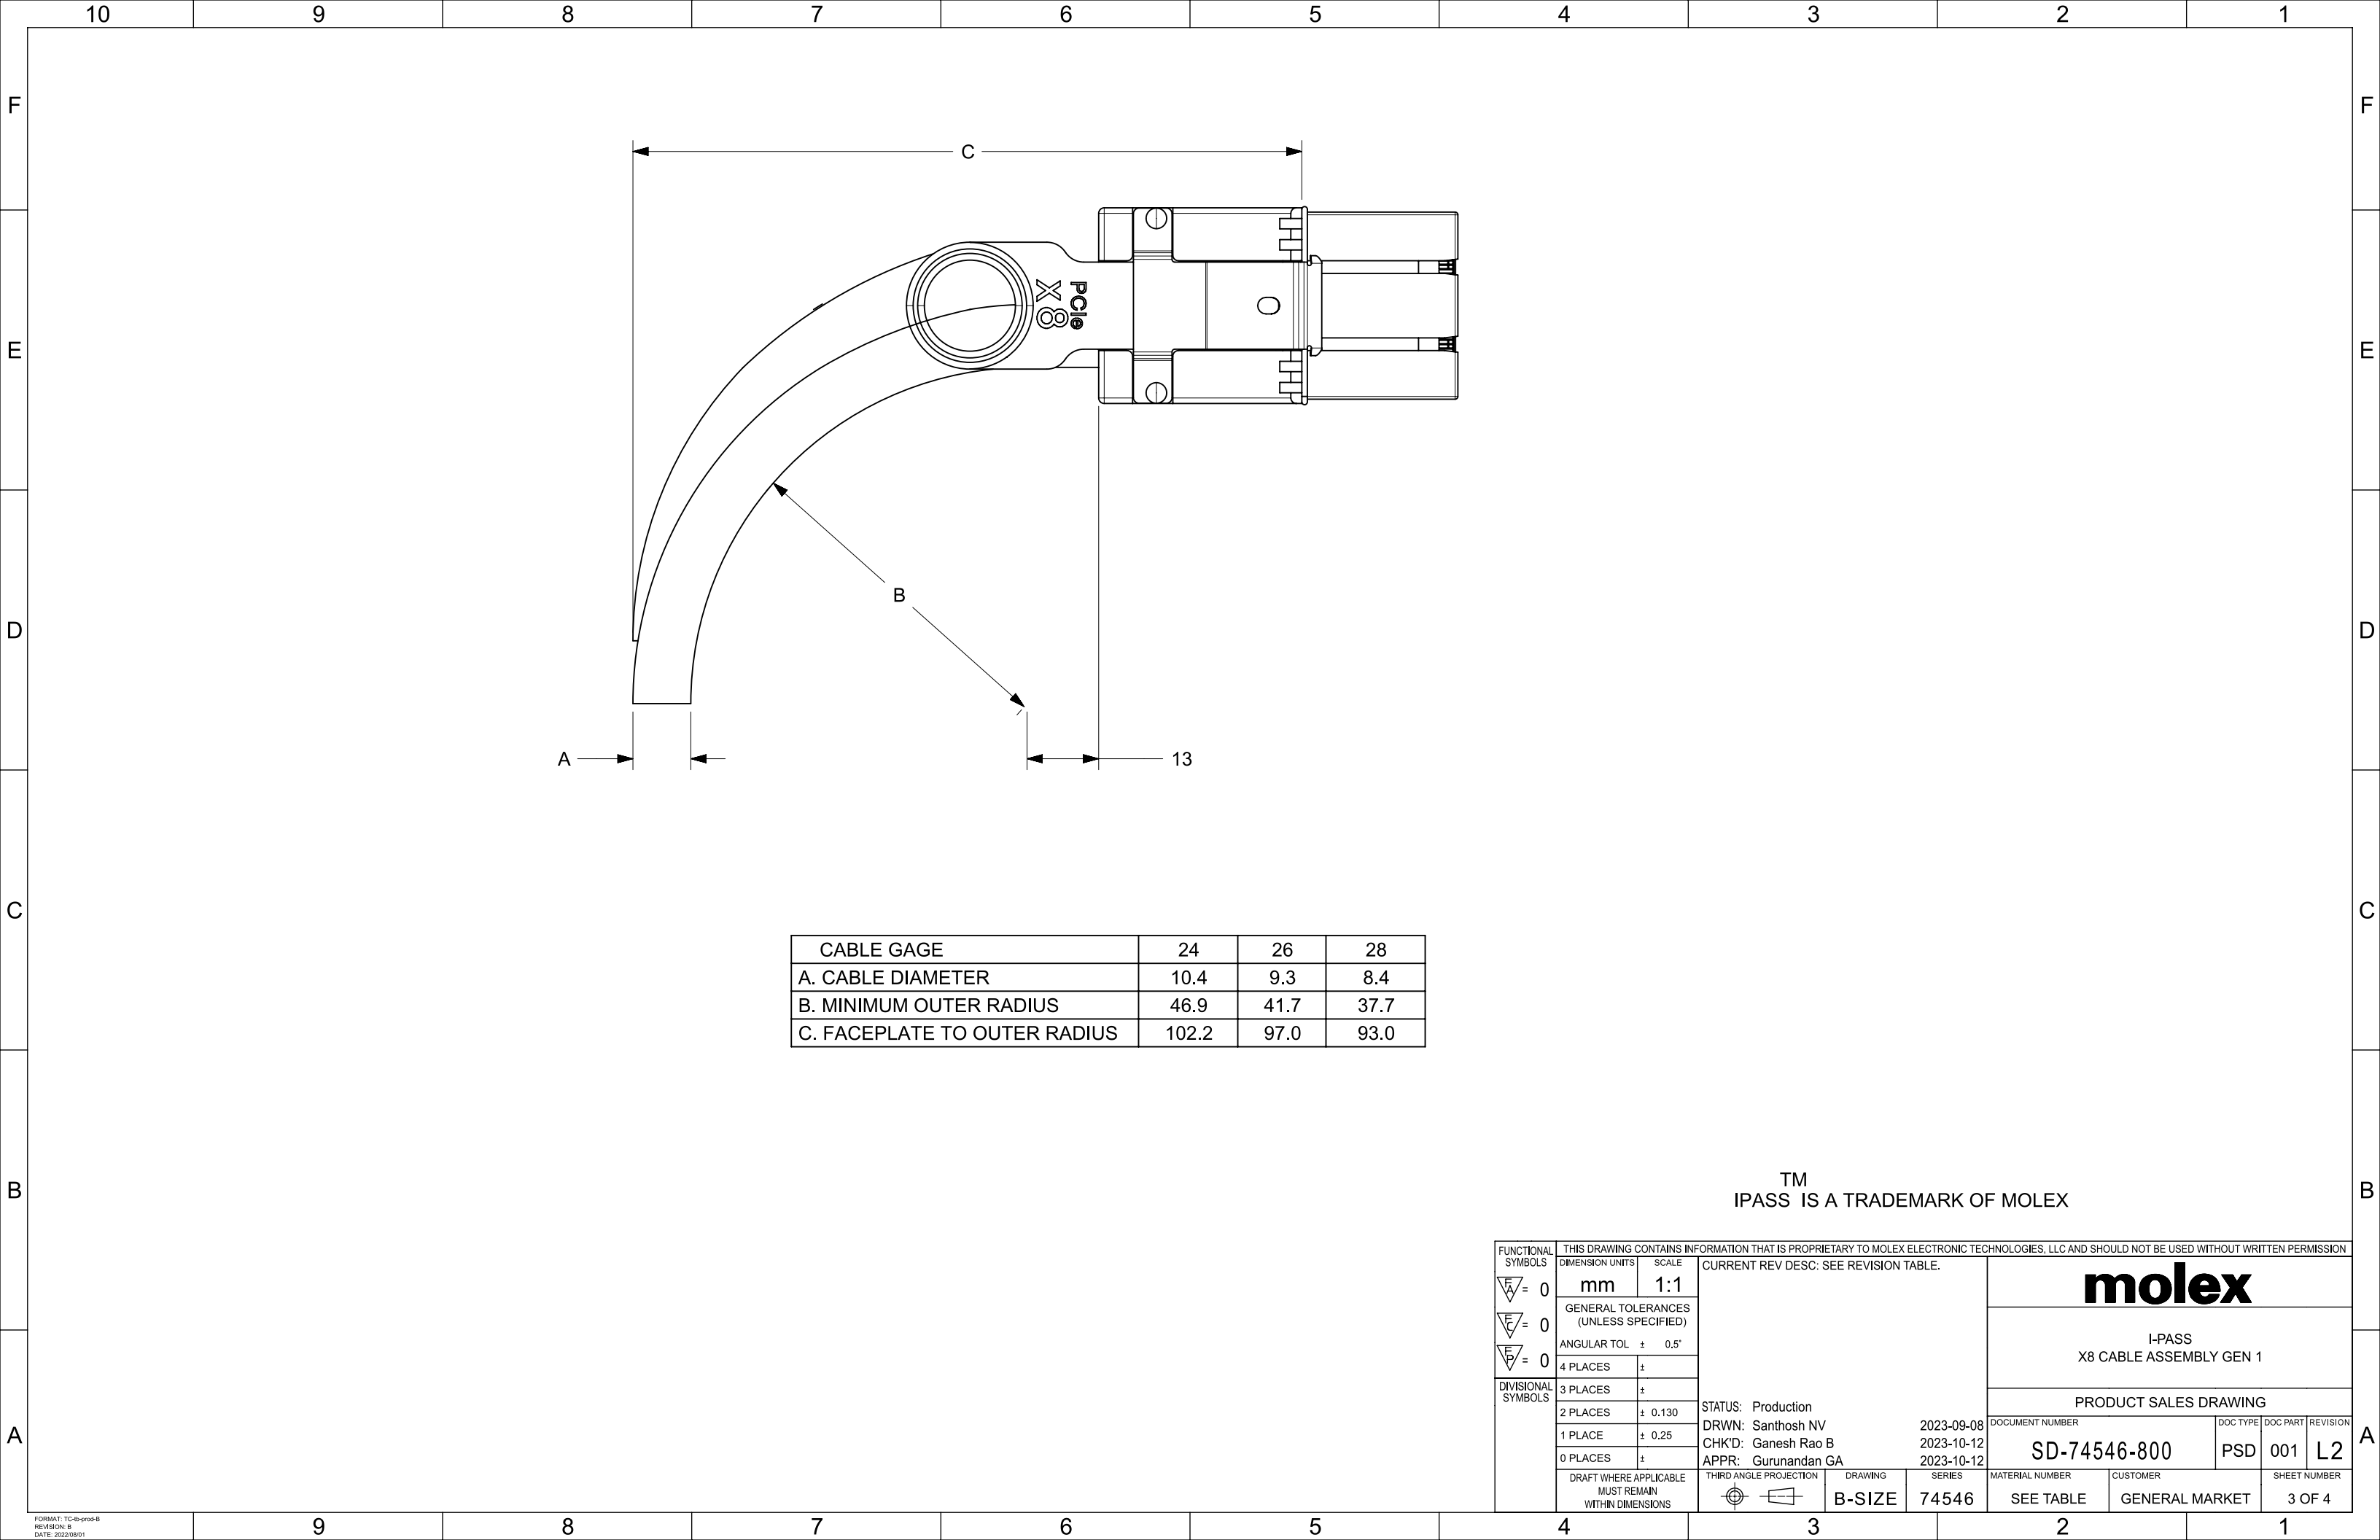

CABLE GAGE	24	26	28
A. CABLE DIAMETER	10.4	9.3	8.4
B. MINIMUM OUTER RADIUS	46.9	41.7	37.7
C. FACEPLATE TO OUTER RADIUS	102.2	97.0	93.0

TM
IPASS IS A TRADEMARK OF MOLEX

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION														
FUNCTIONAL SYMBOLS	DIMENSION UNITS		SCALE	CURRENT REV DESC: SEE REVISION TABLE.			molex							
= 0	mm		1:1											
= 0	GENERAL TOLERANCES (UNLESS SPECIFIED)						I-PASS X8 CABLE ASSEMBLY GEN 1							
= 0	ANGULAR TOL ± 0.5°													
DIVISIONAL SYMBOLS	4 PLACES		±	STATUS: Production DRWN: Santhosh NV CHK'D: Ganesh Rao B APPR: Gurunandan GA			PRODUCT SALES DRAWING							
	3 PLACES		±											
	2 PLACES		± 0.130				DOCUMENT NUMBER SD-74546-800							
	1 PLACE		± 0.25								DOC TYPE PSD			
	0 PLACES		±											
											REVISION L2			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			THIRD ANGLE PROJECTION	DRAWING B-SIZE	SERIES 74546	MATERIAL NUMBER SEE TABLE		CUSTOMER GENERAL MARKET		SHEET NUMBER 3 OF 4				

