



CONNECTIONS	
FROM	TO
P1-A	P2-B
P1-B	P2-A


JUMPER P/N	OVERALL LENGTH, L (m)
1060292001	1.0 +0.2/-0
1060292002	2.0 +0.2/-0
1060292003	3.0 +0.2/-0
1060292004	4.0 +0.2/-0
1060292005	5.0 +0.2/-0
1060292006	6.0 +0.2/-0
1060292007	7.0 +0.2/-0
1060292008	8.0 +0.2/-0
1060292009	9.0 +0.2/-0
1060292010	10.0 +0.2/-0
1060292015	15.0 +0.2/-0
1060292020	20.0+0.2/-0
1060292025	25.0 +0.2/-0
1060292030	30.0+0.3/-0
1060292040	40.0 +0.4/-0
1060292050	50.0 +0.5/-0

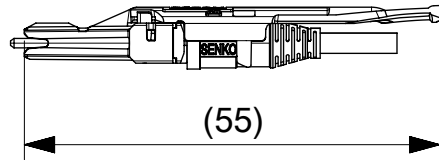

VIEW C



VIEW D

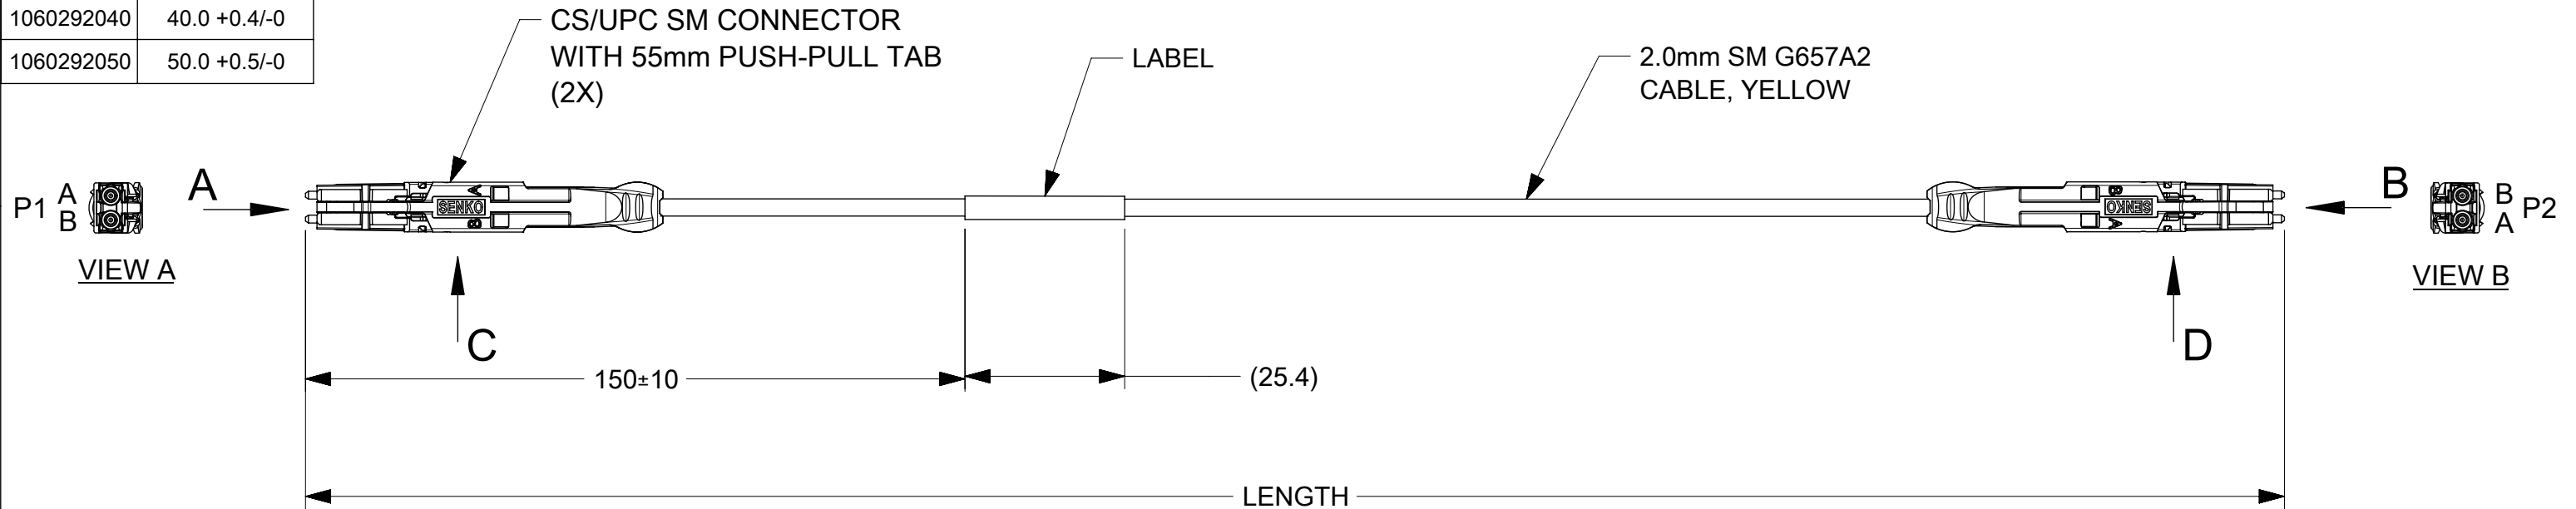

NOTES:

1. DUST CAP IS INCLUDED BUT NOT SHOWN.
2. OPTICAL LOSS AS PER CONNECTOR @1310nm
INSERTION LOSS : $\leq 0.35\text{dB}$
RETURN LOSS : $\geq 50\text{dB}$
3. LABEL CONTENT: MOLEX P/N AND SERIAL NUMBER.
4. CABLE MINIMUM BEND RADIUS
DYNAMIC 60MM
STATIC 30MM

DOCUMENT STATUS	P1	RELEASE DATE	2022/02/28	15:03:21
-----------------	----	--------------	------------	----------

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
DIMENSION UNITS		SCALE		CURRENT REV DESC:		molex			
mm		NTS							
GENERAL TOLERANCES (UNLESS SPECIFIED)						CS-CS UPC 2.0MM SM JUMPER WITH 55MM PUSH-PULL TAB			
ANGULAR TOL ± °									
4 PLACES		±				EC NO: 697293 DRWN: JHUANG18			