


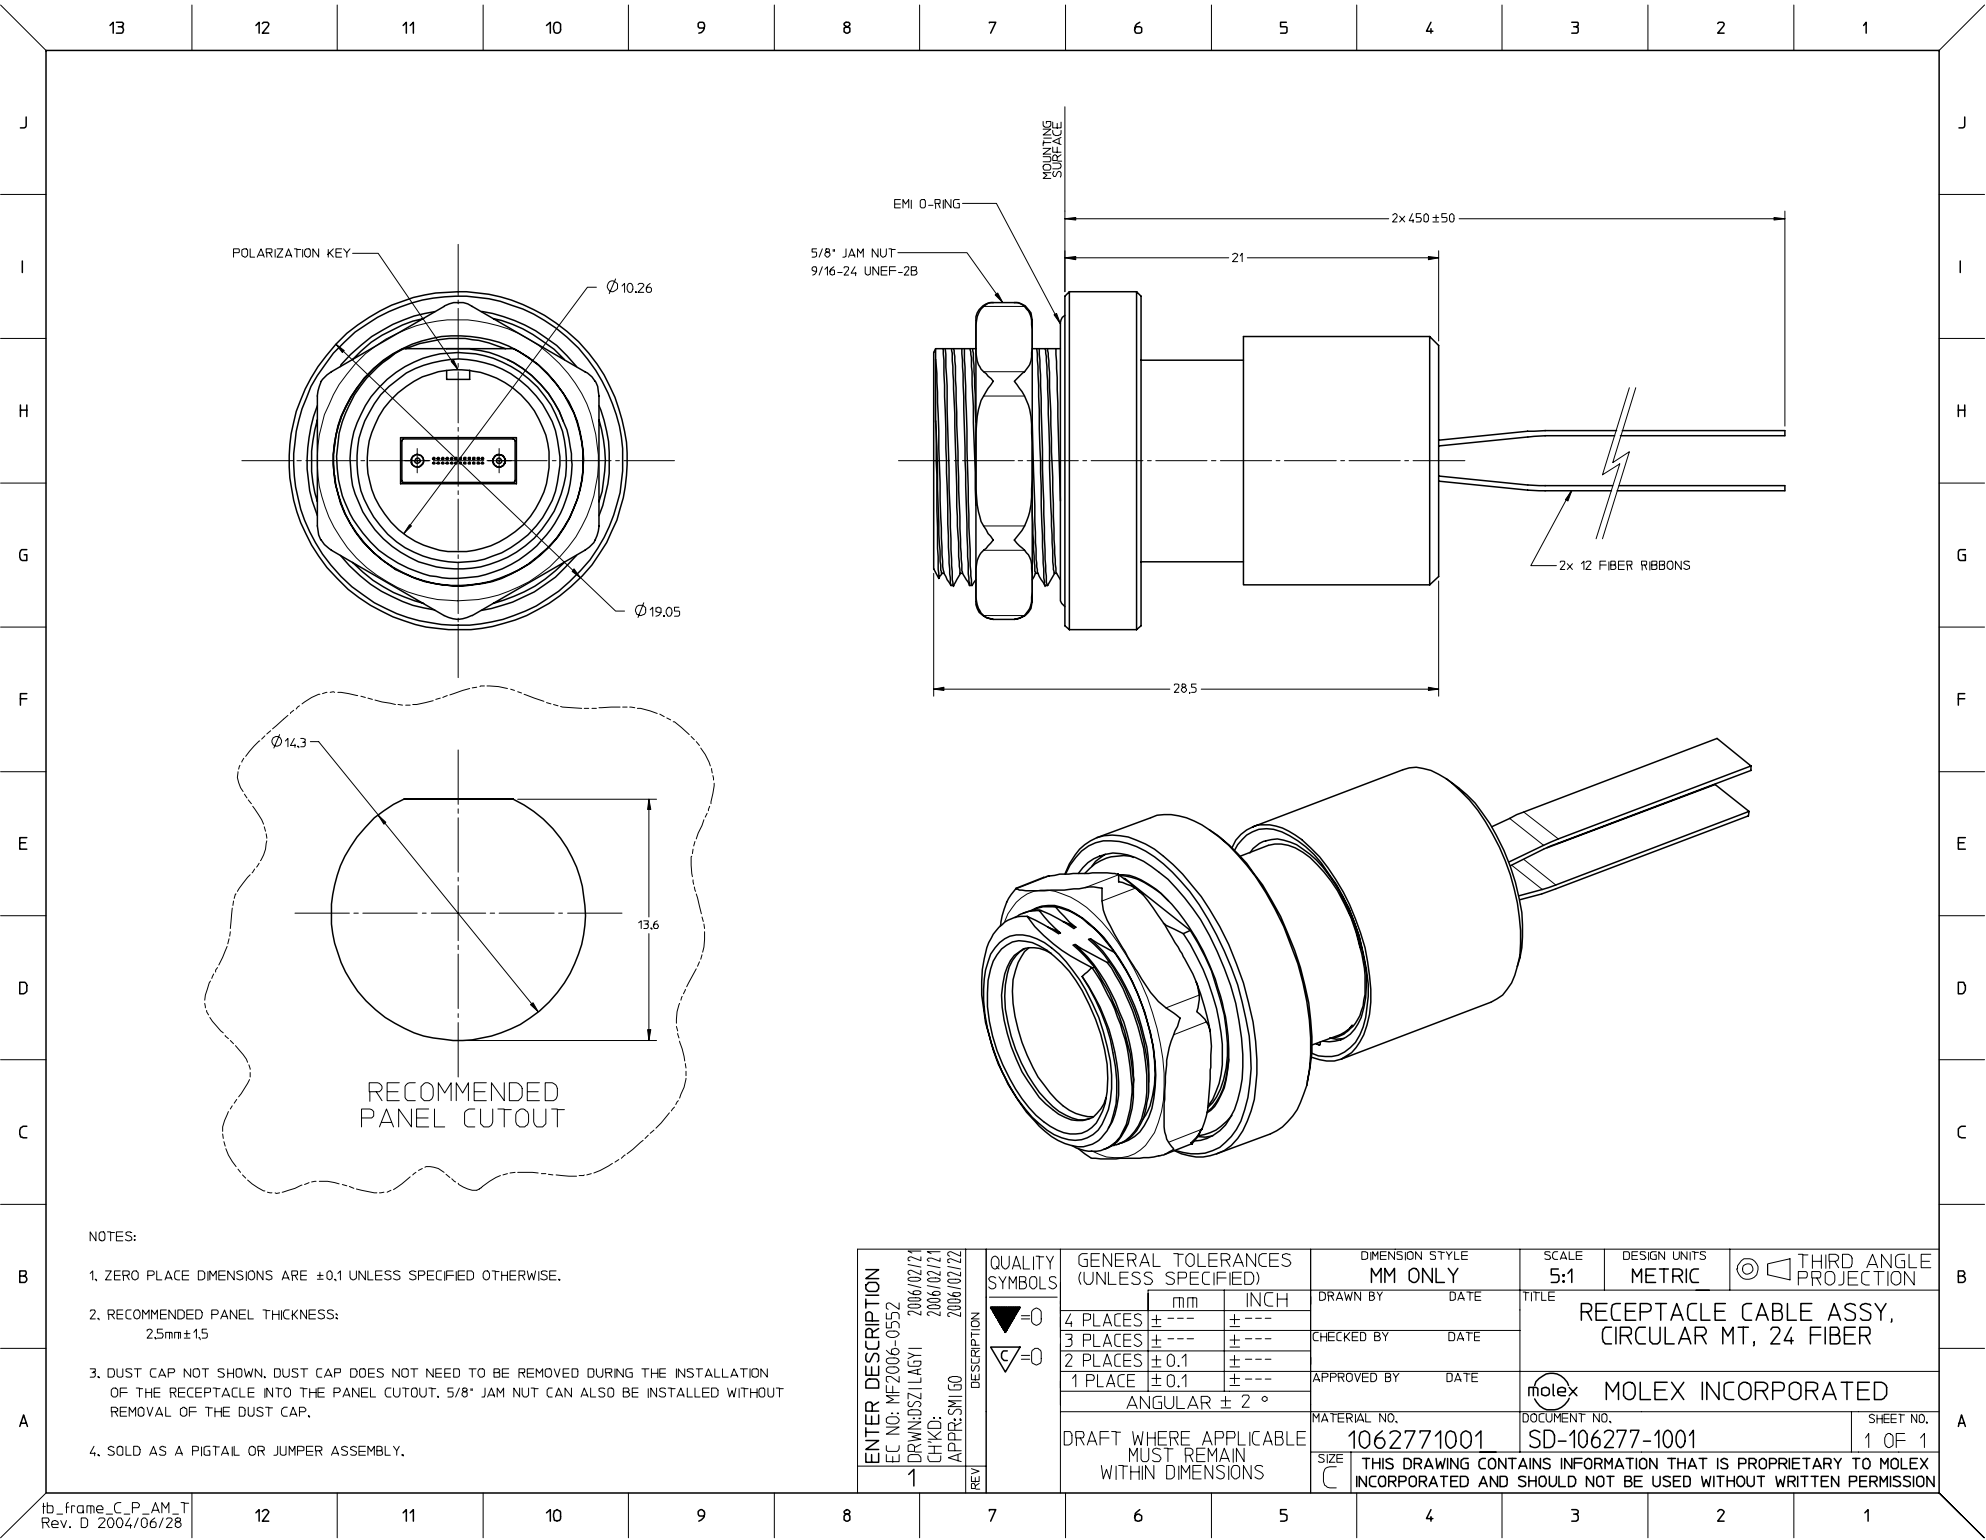

NOTES:

1. ZERO PLACE DIMENSIONS ARE ± 0.1 UNLESS SPECIFIED OTHERWISE.
2. RECOMMENDED PANEL THICKNESS:
2.5mm $\pm$ 1.5
3. DUST CAP NOT SHOWN, DUST CAP DOES NOT NEED TO BE REMOVED DURING THE INSTALLATION OF THE RECEPTACLE INTO THE PANEL CUTOUT. 5/8" JAM NUT CAN ALSO BE INSTALLED WITHOUT REMOVAL OF THE DUST CAP.
4. SOLD AS A PIGTAIL OR JUMPER ASSEMBLY.

ENTER DESCRIPTION EC NO: MF2006-0552 DRAWN: SZILAGYI CHKD: 2006/02/21 APPR: SM LG REV: 1	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 5:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION		
				mm	INCH	DRAWN BY	DATE	TITLE RECEPTACLE CABLE ASSY, CIRCULAR MT, 24 FIBER			
			4 PLACES	± ---	± ---	CHECKED BY	DATE				
			3 PLACES	± ---	± ---	APPROVED BY	DATE				
			2 PLACES	± 0.1	± ---	MATERIAL NO. 1062771001		DOCUMENT NO. SD-106277-1001		SHEET NO. 1 OF 1	
			1 PLACE	± 0.1	± ---						
			ANGULAR ± 2 °		SIZE C		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS											