
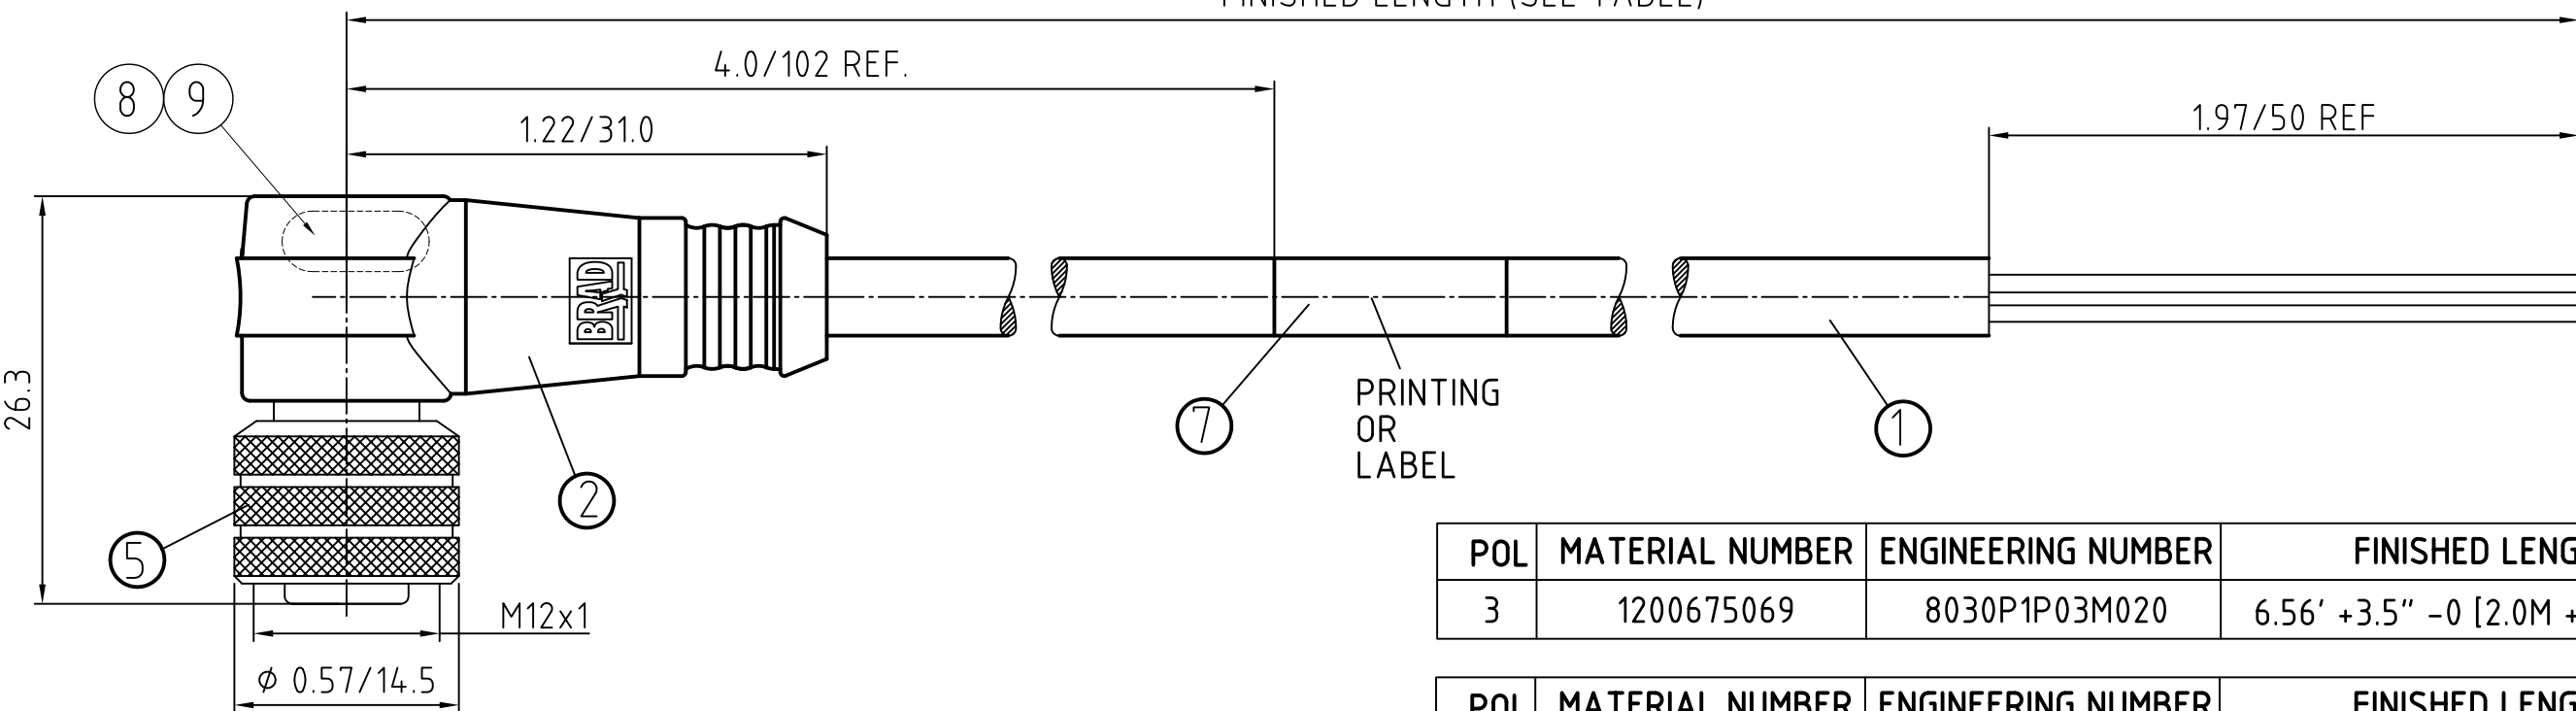
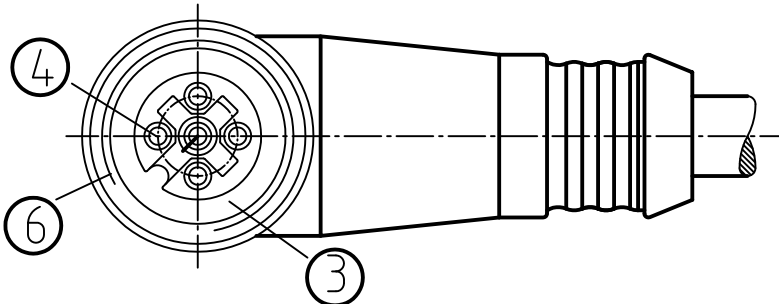



F
E
D
C
B
A

10	9	8	7	6	5	4	3	2	1
FINISHED LENGTH (SEE TABLE)									
									
									
CONNECTOR SPECIFICATION:									
VOLTAGE RATING		10 TO 30VDC							
AMPERAGE RATING		max. 4 AMPS							
PROTECTION		IP67							
OPERATING TEMPERATURE		FLEXING: -5°C TO +90°C STATIC: -30°C TO +90°C							
ITEM	COMPONENT	MATERIAL	FINISH						
9	LED		GREEN						
8	LED		YELLOW						
7	LABLE	MYLAR	BLACK/YELLOW						
6	O-RING	VITON	RED						
5	COUPLER	BRASS	NICKEL PLATED						
4	PIN CONTACT	COPPER ALLOY	GOLD OVER NICKEL						
3	INSERT	PUR	BLACK						
2	OVERMOLD	POLYURETHANE (PUR)	TRANSP.						
1	CABLE- 22/3-5 (COPPER STRANDING) 3/4/5 CONDUCT. 300V	JACKET: PUR	BLACK						

3-POLE

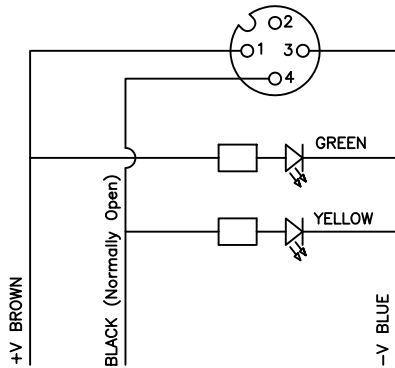


4-POLE

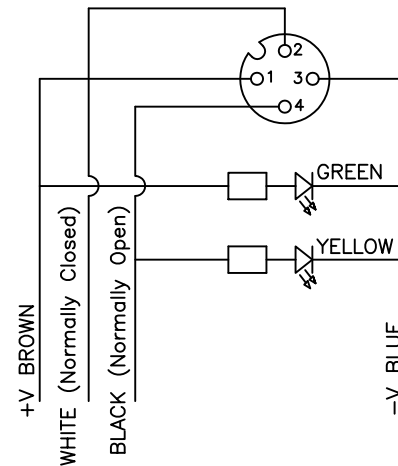

FEMALE FACE VIEW

3-POLE




WIRING DIAGRAM

1 BROWN
2 NOT USED
3 BLUE
4 BLACK

FEMALE FACE VIEW

4-POLE

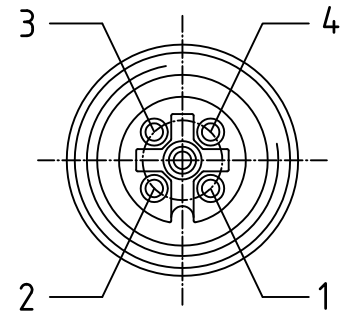

WIRING DIAGRAM

1 BROWN
2 WHITE
3 BLUE
4 BLACK

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
3	1200675069	8030P1P03M020	6.56' +3.5" -0 [2.0M +89 -0]

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
4	1200060618	8040P1P03M020	6.56' +3.5" -0 [2.0M +89 -0]

DESCRIPTION EC NO.: WEU2010-0318 DRWN: BBRAUCH CHKD: RE APPR: NSTAUDIG 01.02.10 2010/02/05	QUALITY SYMBOLS = 0 = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE IN/MM		SCALE 2:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
			mm	INCH	DRAWN BY DATE LSTEMMLE 2010/01/22		MICRO-CHANGE CORDSET 3/4-POL FE 90 SE LED 22/4 BLACK PUR CABLE			
		4 PLACES	±---	±---	CHECKED BY DATE RE 2010/01/22					
		3 PLACES	±---	±---	APPROVED BY DATE NSTAUDIG 2010/02/04					
		2 PLACES	±---	±.01	MATERIAL NO. SEE TABLE		DOCUMENT NO. SD-120067-002		SHEET NO. 1 OF 1	
		1 PLACE	±0.3	±---	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					
		ANGULAR ± --- °								
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SIZE A3							

F
E
D
C
B
A

