


MALE PLUG M12 90° ANGLED

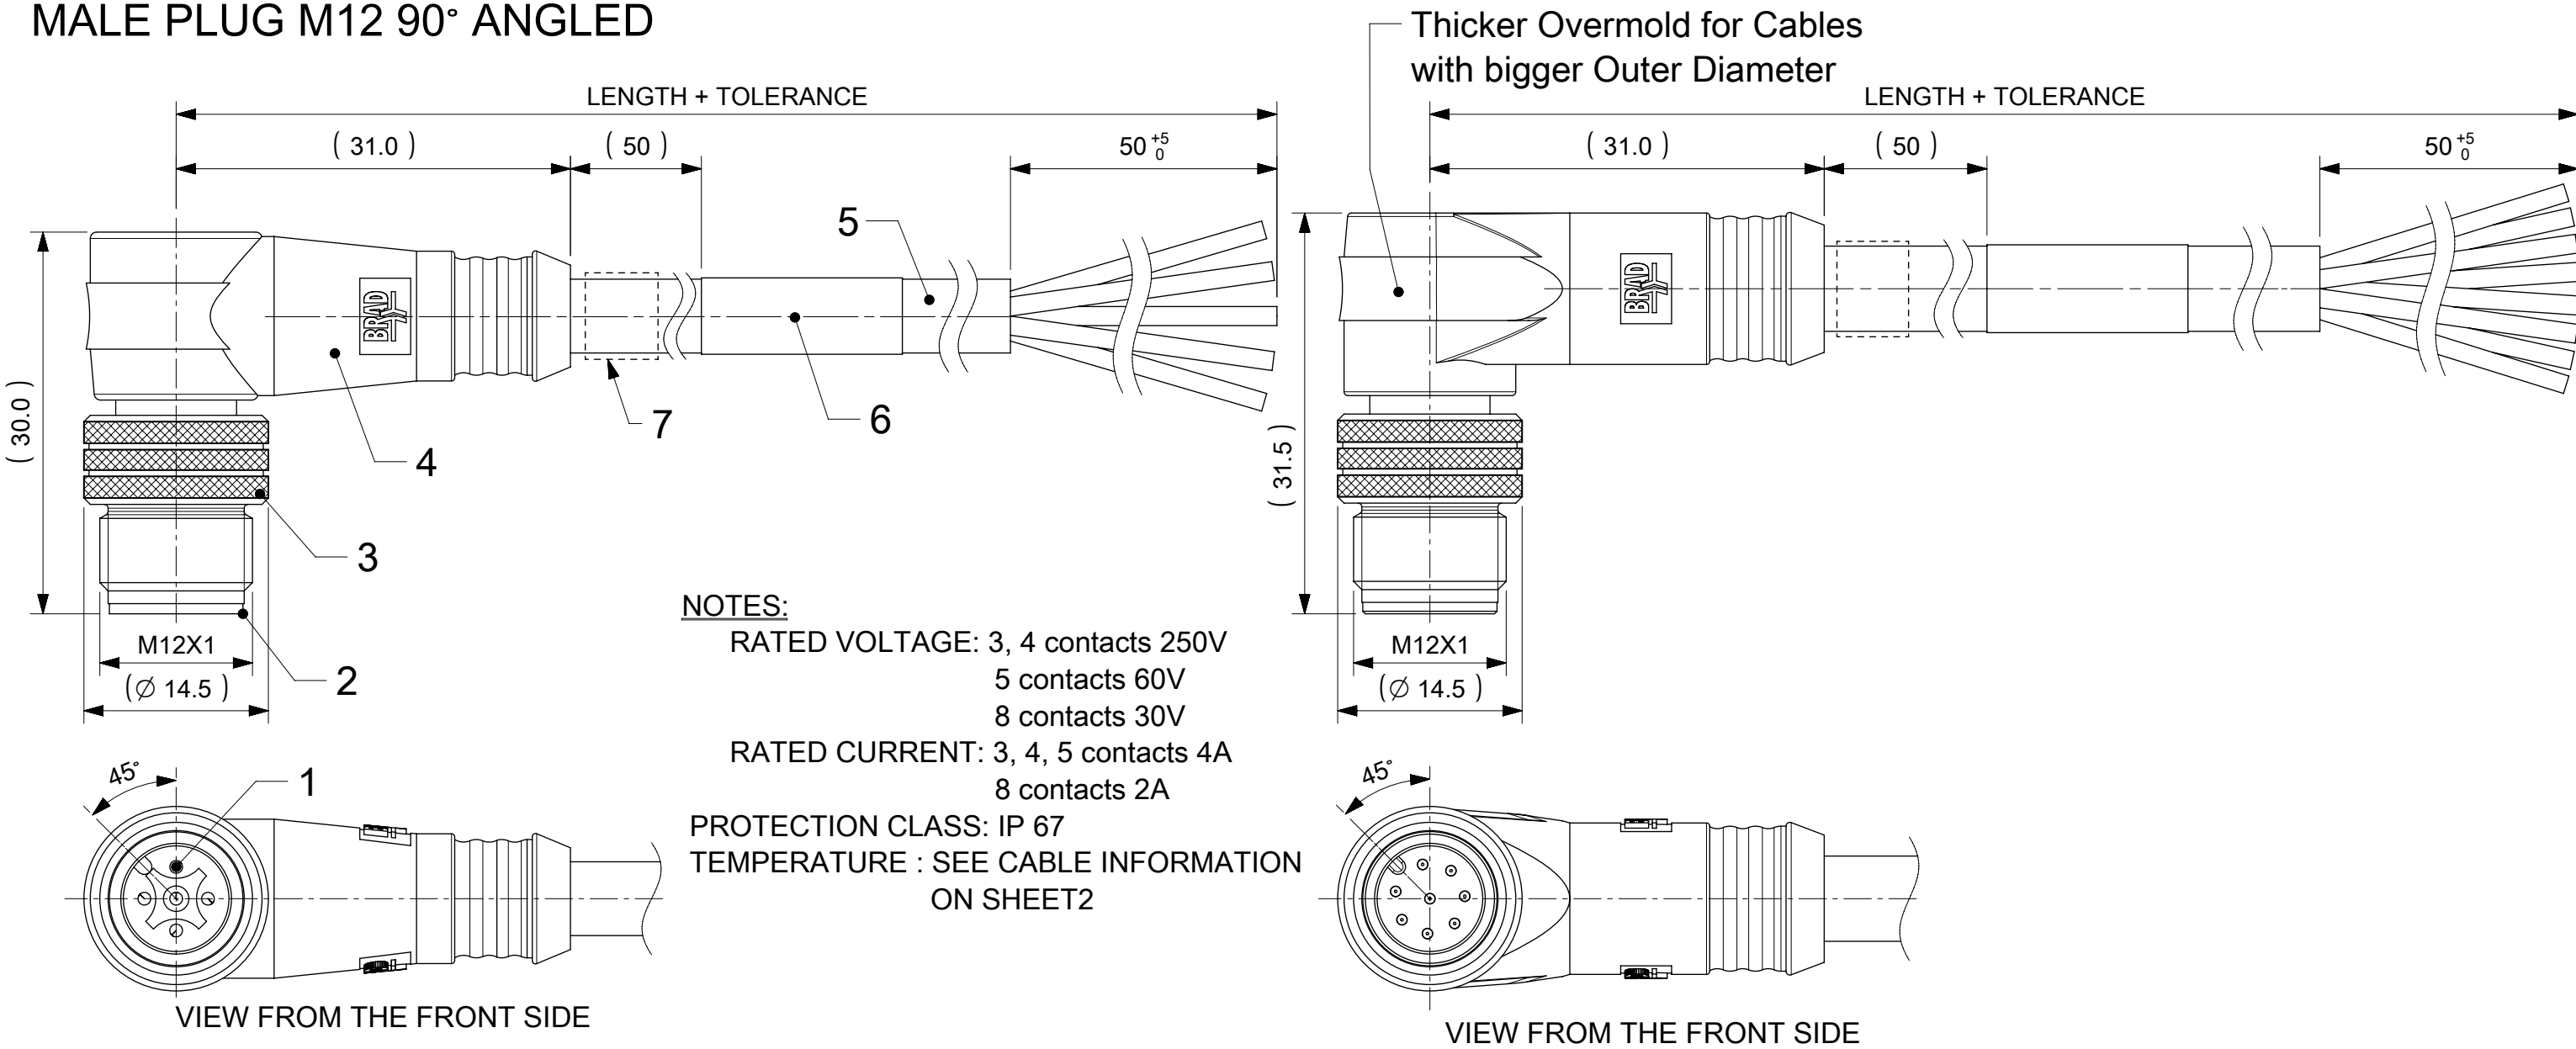

NOTES:  
RATED VOLTAGE: 3, 4 contacts 250V  
5 contacts 60V  
8 contacts 30V  
RATED CURRENT: 3, 4, 5 contacts 4A  
8 contacts 2A  
PROTECTION CLASS: IP 67  
TEMPERATURE : SEE CABLE INFORMATION  
ON SHEET2

CONTACTS POSITION FRONT VIEW:

| 3 CONTACTS                         |       | 4 CONTACTS |       | 5 CONTACTS |       | 8 CONTACTS |        |
|------------------------------------|-------|------------|-------|------------|-------|------------|--------|
|                                    |       |            |       |            |       |            |        |
| PIN                                | WIRE  | PIN        | WIRE  | PIN        | WIRE  | PIN        | WIRE   |
| 1                                  | BROWN | 1          | BROWN | 1          | BROWN | 1          | WHITE  |
| 2                                  | ---   | 2          | WHITE | 2          | WHITE | 2          | BROWN  |
| 3                                  | BLUE  | 3          | BLUE  | 3          | BLUE  | 3          | GREEN  |
| 4                                  | BLACK | 4          | BLACK | 4          | BLACK | 4          | YELLOW |
| 5                                  | ---   | 5          | ---   | 5          | GREY  | 5          | GREY   |
|                                    |       |            |       |            |       | 6          | PINK   |
|                                    |       |            |       |            |       | 7          | BLUE   |
|                                    |       |            |       |            |       | 8          | RED    |
| CODING REQUIRED TO IEC 61076-2-101 |       |            |       |            |       |            |        |

FOR OPTIONS SEE - NUMERICAL CODE - ON SHEET 2

|                                                                                                                                               |               |                                                                      |                 |                                                                                                                                                                                                                             |
|-----------------------------------------------------------------------------------------------------------------------------------------------|---------------|----------------------------------------------------------------------|-----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7                                                                                                                                             | 0 OR 2        | I/D CARRIER (SEE MATRIX)                                             | PVC             | TRANSPARENT                                                                                                                                                                                                                 |
| 6                                                                                                                                             | 1             | LABEL YELLOW                                                         | VINYL           | ---                                                                                                                                                                                                                         |
| 5                                                                                                                                             | -             | CABLE                                                                | SEE SHEET 2     | ---                                                                                                                                                                                                                         |
| 4                                                                                                                                             | -             | OVERMOULDING BLACK                                                   | TPU             | ---                                                                                                                                                                                                                         |
| 3                                                                                                                                             | 1             | COUPLING NUT MALE                                                    | BRASS           | NICKEL                                                                                                                                                                                                                      |
| 2                                                                                                                                             | 1             | INSERT MALE BLACK                                                    | PUR             | ---                                                                                                                                                                                                                         |
| 1                                                                                                                                             | 3 / 4 / 5 / 8 | CONTACT M12 MALE                                                     | BRASS           | SELECTIVE Au OVER Ni                                                                                                                                                                                                        |
| ITEM                                                                                                                                          | QTY.          | DESCRIPTION                                                          | MATERIAL        | FINISH                                                                                                                                                                                                                      |
| THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION |               |                                                                      |                 |                                                                                                                                                                                                                             |
| DIMENSION UNITS                                                                                                                               |               | SCALE                                                                |                 | <div>molex</div> <div>CSE M12 XP AC MA RA XM SE UNSH</div> <div>PRODUCT CUSTOMER DRAWING</div> <div>DOCUMENT NUMBER<br/>1200659138</div> <div>DOC TYPE<br/>PSD</div> <div>DOC PART<br/>000</div> <div>REVISION<br/>A8</div> |
| mm                                                                                                                                            |               | 2:1                                                                  |                 |                                                                                                                                                                                                                             |
| GENERAL TOLERANCES<br>(UNLESS SPECIFIED)                                                                                                      |               | CURRENT REV DESC: REMOVED OBSOLETE PART<br>NUMBERS AS PER PCN#514486 |                 |                                                                                                                                                                                                                             |
| ANGULAR TOL ± 1.0 °                                                                                                                           |               | EC NO: 774109                                                        |                 |                                                                                                                                                                                                                             |
| 4 PLACES                                                                                                                                      | ±             | DRWN: VISHAH2                                                        | 2023/12/20      |                                                                                                                                                                                                                             |
| 3 PLACES                                                                                                                                      | ±             | CHK'D: GGA                                                           | 2024/01/29      |                                                                                                                                                                                                                             |
| 2 PLACES                                                                                                                                      | ± 0.05        | APPR: GGA                                                            | 2024/01/29      |                                                                                                                                                                                                                             |
| 1 PLACE                                                                                                                                       | ±             | INITIAL REVISION:                                                    |                 |                                                                                                                                                                                                                             |
| 0 PLACES                                                                                                                                      | ± 0.5         | DRWN: JMARSZALEK                                                     | 2016/01/14      |                                                                                                                                                                                                                             |
| DRAFT WHERE APPLICABLE<br>MUST REMAIN<br>WITHIN DIMENSIONS                                                                                    |               | APPR: RSILLER                                                        | 2016/04/08      |                                                                                                                                                                                                                             |
| THIRD ANGLE PROJECTION                                                                                                                        |               | SERIES                                                               | MATERIAL NUMBER |                                                                                                                                                                                                                             |
|                                                                                                                                               |               | A3-SIZE                                                              | 120065          |                                                                                                                                                                                                                             |
| DRAWING                                                                                                                                       |               | SEE SHEET 3                                                          | CUSTOMER        |                                                                                                                                                                                                                             |
| A3-SIZE                                                                                                                                       |               | GENERAL MARKET                                                       | SHEET NUMBER    |                                                                                                                                                                                                                             |
| 120065                                                                                                                                        |               | 1 OF 3                                                               |                 |                                                                                                                                                                                                                             |

ENGINEERING NO. - NUMERICAL CODE (Available parts see PART LIST table. Others on request).

OPTIONS

80X007XXXXXX

80=M12x1  
Single ended

Contacts:  
3=3 Contacts  
4=4 Contacts  
5=5 Contacts  
8=8 Contacts


Heads style:  
007=Plug Male  
90° Angled

Cable type: See Table

Units:  
M=Meter

Length  
Examples:  
005=0.5 unit  
010=1 unit  
100=10 units

Overmold color:  
Blank (Standard)=Black  
A=Grey / G=Black / Y=Yellow  
  
Coupling Nut:  
Blank (Standard) & 3=Knurled Brass Ni Plated  
1=Hexagonal Stainless steel  
5=Knurled Derlin  
7=Knurled Brass Ni Plated, Teflon Coated  
9=Knurled / Hexagonal Brass Ni Plated  
  
H= 2 pcs. of I/D Carrier PVC Transparent

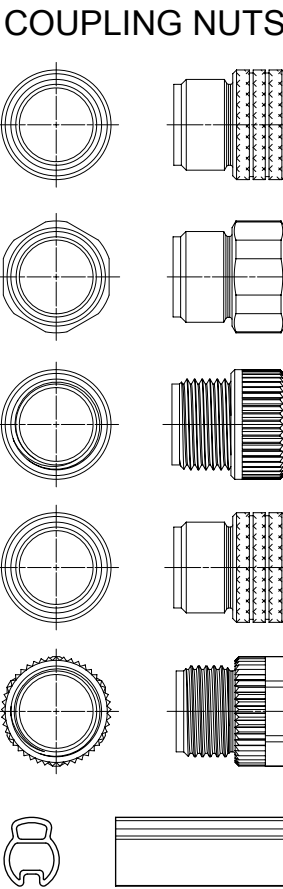


CABLE INFORMATION (for more information see Cable Data Sheet).

| CABLE TYPE | NO. OF WIRES  | CROSS SECTION | CABLE JACKET    | UL                    | CSA                      | STATIC: TEMP. / BENDING RADIUS | DYNAMIC: TEMP. / BENDING RADIUS | DRAG CHAIN                                          | SHIELD |
|------------|---------------|---------------|-----------------|-----------------------|--------------------------|--------------------------------|---------------------------------|-----------------------------------------------------|--------|
| E02        | 3 / 4 / 5 / 8 | 0.25mm²       | PVC BLACK       | UL 2464/1729          | C22.2 I/II A/B 80°C/300V | -30°C to +80°C, 10xO.D.        | -10°C to +80°C, 15xO.D.         | -                                                   | -      |
| E03        | 3 / 4 / 5     | 0.34mm²       | PVC BLACK       | UL 2464/1729          | C22.2 I/II A/B 80°C/300V | -30°C to +80°C, 10xO.D.        | -10°C to +80°C, 15xO.D.         | -                                                   | -      |
| H08        | 3 / 4 / 5 / 8 | 0.25mm²       | PUR BLACK LS0H  | UL 21198/10493        | C22.2 I/II A/B 80°C/300V | -40°C to +80°C, 5xO.D.         | -25°C to +80°C, 10xO.D.         | 2 000 000 cycles at 20°C, Temp. range +5°C to +60°C | -      |
| H09        | 3 / 4 / 5     | 0.34mm²       | PUR BLACK LS0H  | UL 21198/10493        | C22.2 I/II A/B 80°C/300V | -40°C to +80°C, 5xO.D.         | -25°C to +80°C, 10xO.D.         | 2 000 000 cycles at 20°C, Temp. range +5°C to +60°C | -      |
| P02        | 3 / 4 / 5 / 8 | 0.25mm²       | PUR / PVC BLACK | -                     | -                        | -30°C to +80°C, 7xO.D.         | -5°C to +80°C, 15xO.D.          | -                                                   | -      |
| P03        | 3 / 4 / 5     | 0.34mm²       | PUR / PVC BLACK | -                     | -                        | -30°C to +80°C, 7xO.D.         | -5°C to +80°C, 15xO.D.          | -                                                   | -      |
| E13        | 3             | 18AWG         | PVC YELLOW      | UL 2661/1731          | I/II A/B 80°C/300V       | -                              | -                               | -                                                   | -      |
| E52        | 3 / 4 / 8     | 0.34mm²       | PVC GREY        | -                     | -                        | -30°C to +70°C                 | -5°C to +70°C                   | -                                                   | -      |
| H69        | 4             | 0.20mm²       | PUR GREY LS0H   | -                     | -                        | -                              | -                               | -                                                   | -      |
| I03        | 3 / 4 / 5     | 0.34mm²       | PVC CEI GREY    | -                     | -                        | -30°C to +70°C                 | -5°C to +70°C                   | -                                                   | -      |
| K03        | 4 / 5         | 0.34mm²       | TPE YELLOW      | -                     | I/II A/B 90°C/300V       | -40°C to +105°C                | -                               | -                                                   | -      |
| K05        | 3 / 4 / 5     | 0.34mm²       | TPE YELLOW      | UL ITC E195601 or PLC | I/II A/B 90°C/300V       | -                              | -                               | -                                                   | -      |
| P12        | 3 / 5         | 0.50mm²       | PUR BLACK       | -                     | -                        | -30°C to +90°C                 | -5°C to +90°C                   | -                                                   | -      |
| P82        | 3 / 4 / 5     | 0.34mm²       | PUR IRR ORANGE  | -                     | -                        | -50°C to +105°C, 5xO.D.        | -40°C to +105°C, 7.5xO.D.       | -                                                   | -      |

CABLE LENGTH TOLERANCES

| OVER    | UP TO AND INCLUDING | TOLERANCES             |
|---------|---------------------|------------------------|
| 0       | 305mm               | +19mm                  |
| 305mm   | 915mm               | +45mm                  |
| 915mm   | 1830mm              | +56mm                  |
| 1830mm  | 3660mm              | +89mm                  |
| 3660mm  | 7320mm              | +165mm                 |
| 7320mm  | 14640mm             | +317mm                 |
| 14640mm | 30500mm             | +610mm                 |
| 30500mm | >                   | +2% of finished length |

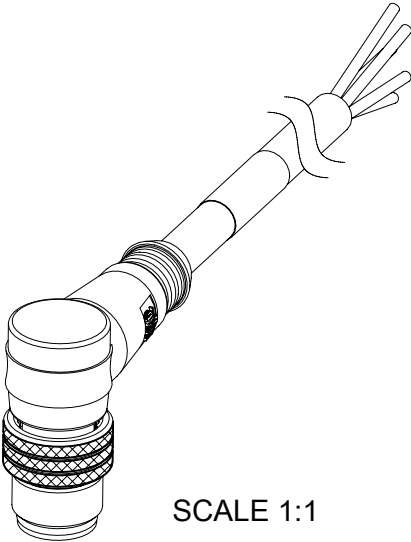

SCALE 1:1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

|                                                      |        |                                                                   |                                                            |                          |                 |                |              |          |          |
|------------------------------------------------------|--------|-------------------------------------------------------------------|------------------------------------------------------------|--------------------------|-----------------|----------------|--------------|----------|----------|
| DIMENSION UNITS                                      | SCALE  | CURRENT REV DESC: REMOVED OBSOLETE PART NUMBERS AS PER PCN#514486 | <div>molex</div> <div>CSE M12 XP AC MA RA XM SE UNSH</div> |                          |                 |                |              |          |          |
| mm                                                   | 1:1    |                                                                   |                                                            |                          |                 |                |              |          |          |
| GENERAL TOLERANCES (UNLESS SPECIFIED)                |        |                                                                   |                                                            |                          |                 |                |              |          |          |
| ANGULAR TOL ± 1.0 °                                  |        |                                                                   |                                                            |                          |                 |                |              |          |          |
| 4 PLACES                                             | ±      | EC NO: 774109<br>DRWN: VISHAH2<br>CHK'D: GGA<br>APPR: GGA         | 2023/12/20<br>2024/01/29<br>2024/01/29                     | PRODUCT CUSTOMER DRAWING |                 |                |              |          |          |
| 3 PLACES                                             | ±      |                                                                   |                                                            |                          |                 |                |              |          |          |
| 2 PLACES                                             | ± 0.05 |                                                                   |                                                            |                          |                 |                |              |          |          |
| 1 PLACE                                              | ± 0.3  | INITIAL REVISION:                                                 |                                                            | DOCUMENT NUMBER          |                 |                | DOC TYPE     | DOC PART | REVISION |
| 0 PLACES                                             | ± 0.5  | DRWN: JMARSZALEK<br>APPR: RSILLER                                 |                                                            |                          |                 |                |              |          |          |
| DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS |        | THIRD ANGLE PROJECTION                                            | DRAWING                                                    | SERIES                   | MATERIAL NUMBER | CUSTOMER       | SHEET NUMBER |          |          |
|                                                      |        |                                                                   | A3-SIZE                                                    | 120065                   | SEE SHEET 3     | GENERAL MARKET | 2 OF 3       |          |          |

# PART LIST

| No. | Part No.   | Engineering No. | Cable Length | No. | Part No.   | Engineering No. | Cable Length | No. | Part No.   | Engineering No. | Cable Length | No. | Part No.   | Engineering No. | Cable Length |
|-----|------------|-----------------|--------------|-----|------------|-----------------|--------------|-----|------------|-----------------|--------------|-----|------------|-----------------|--------------|
| 1   | 1200060273 | 803007E03M020   | 2m           | 36  | 1200651688 | 804007K03M050   | 5m           | 71  | 1200658723 | 803007H09M030   | 3m           | 106 | 1200657170 | 804007E03M015   | 1.5m         |
| 2   | 1200060275 | 803007E03M050   | 5m           | 37  | 1200651691 | 804007K05M020   | 2m           | 72  | 1200658724 | 803007H09M040   | 4m           | 107 | 1200657171 | 804007E03M060   | 6m           |
| 3   | 1200060288 | 803007P03M020   | 2m           | 38  | 1200651693 | 804007K05M050   | 5m           | 73  | 1200658725 | 803007H09M050   | 5m           | 108 | 1200657172 | 804007E03M080   | 8m           |
| 4   | 1200060289 | 803007P03M030   | 3m           | 39  | 1200651800 | 808007P02M020   | 2m           | 74  | 1200658726 | 803007H09M100   | 10m          | 109 | 1200657173 | 804007E03M120   | 12m          |
| 5   | 1200060582 | 804007E03M010   | 1m           | 40  | 1200652026 | 804007K03M100   | 10m          | 75  | 1200658724 | 804007H09M010   | 1m           | 110 | 1200657174 | 804007E03M150   | 15m          |

|    |            |                |      |    |            |                 |      |     |            |                |      |     |            |               |     |
|----|------------|----------------|------|----|------------|-----------------|------|-----|------------|----------------|------|-----|------------|---------------|-----|
| 5  | 1200060582 | 804007E03M010  | 1m   | 40 | 1200652026 | 804007K03M100   | 10m  | 75  | 1200658734 | 804007H09M010  | 1m   | 110 | 1200657174 | 804007E03M150 | 15m |
| 6  | 1200060583 | 804007E03M030  | 3m   | 41 | 1200652145 | 804007P03M040   | 4m   | 76  | 1200658735 | 804007H09M015  | 1.5m | 111 | 1200657175 | 804007E03M300 | 30m |
| 7  | 1200060584 | 804007E03M050  | 5m   | 42 | 1200652149 | 805007P03M060   | 6m   | 77  | 1200658736 | 804007H09M020  | 2m   | 112 | 1200657325 | 804007E03M250 | 25m |
| 8  | 1200060589 | 804007I03M020  | 2m   | 43 | 1200652159 | 805007K03M020   | 2m   | 78  | 1200658737 | 804007H09M030  | 3m   | 113 |            |               |     |
| 9  | 1200060592 | 804007P03M020  | 2m   | 44 | 1200652161 | 805007K03M050   | 5m   | 79  | 1200658738 | 804007H09M040  | 4m   | 114 |            |               |     |
| 10 | 1200060593 | 804007P03M030  | 3m   | 45 | 1200655006 | 805007P03M100   | 10m  | 80  | 1200658739 | 804007H09M050  | 5m   | 115 |            |               |     |
| 11 | 1200060594 | 804007P03M050  | 5m   | 46 | 1200658096 | 805007E03M020   | 2m   | 81  | 1200658740 | 804007H09M100  | 10m  | 116 |            |               |     |
| 12 | 1200060595 | 804007P03M100  | 10m  | 47 | 1200658186 | 805007P03M050   | 5m   | 82  | 1200658748 | 805007H09M010  | 1m   | 117 |            |               |     |
| 13 | 1200060696 | 805007P03M015  | 1.5m | 48 | 1200658229 | 803007E13M050   | 5m   | 83  | 1200658749 | 805007H09M015  | 1.5m | 118 |            |               |     |
| 14 | 1200060697 | 805007P03M020  | 2m   | 49 | 1200658235 | 804007E03M2501  | 25m  | 84  | 1200658750 | 805007H09M020  | 2m   | 119 |            |               |     |
| 15 | 1200060699 | 805007P03M040  | 4m   | 50 | 1200658327 | 805007I03M015   | 1.5m | 85  | 1200658751 | 805007H09M030  | 3m   | 120 |            |               |     |
| 16 | 1200061764 | 804007P03M010  | 1m   | 51 | 1200658506 | 803007E03M100   | 10m  | 86  | 1200658752 | 805007H09M040  | 4m   | 121 |            |               |     |
| 17 | 1200061975 | 804007E03M020  | 2m   | 52 | 1200658515 | 804007E03M0501H | 5m   | 87  | 1200658753 | 805007H09M050  | 5m   | 122 |            |               |     |
| 18 | 1200062055 | 803007P03M050  | 5m   | 53 | 1200658516 | 804007E03M1001H | 10m  | 88  | 1200658754 | 805007H09M100  | 10m  | 123 |            |               |     |
| 19 | 1200062238 | 804007E03M100  | 10m  | 54 | 1200658522 | 805007P12M020   | 2m   | 89  | 1200658757 | 808007H08M020  | 2m   | 124 |            |               |     |
| 20 | 1200062498 | 805007E03M100  | 10m  | 55 | 1200658567 | 803007E03M010   | 1m   | 90  | 1200659138 | 805007E03M010  | 1m   | 125 |            |               |     |
| 21 | 1200062638 | 804007E03M006  | 0.6m | 56 | 1200658568 | 803007E03M030   | 3m   | 91  | 1200659143 | 805007H09M200  | 20m  | 126 |            |               |     |
| 22 | 1200062680 | 804007E03M0101 | 1m   | 57 | 1200658569 | 803007E03M040   | 4m   | 92  | 1200659146 | 805007E03M200  | 20m  | 127 |            |               |     |
| 23 | 1200062681 | 804007E03M0201 | 2m   | 58 | 1200658572 | 804007E03M040   | 4m   | 93  | 1200659151 | 805007P03M150  | 15m  | 128 |            |               |     |
| 24 | 1200062682 | 804007E03M0501 | 5m   | 59 | 1200658596 | 803007I03M010   | 1m   | 94  | 1200659204 | 805007P12M050  | 5m   | 129 |            |               |     |
| 25 | 1200062929 | 805007E03M050  | 5m   | 60 | 1200658597 | 803007I03M040   | 4m   | 95  | 1200659230 | 805007P03M010  | 1m   | 130 |            |               |     |
| 26 | 1200063575 | 804007E03M1001 | 10m  | 61 | 1200658598 | 803007I03M100   | 10m  | 96  | 1200659231 | 805007P03M200  | 20m  | 131 |            |               |     |
| 27 | 1200063576 | 804007E03M1501 | 15m  | 62 | 1200658602 | 804007I03M010   | 1m   | 97  | 1200659247 | 805007E03M020Y | 2m   | 132 |            |               |     |
| 28 | 1200063656 | 804007E03M2001 | 20m  | 63 | 1200658603 | 804007I03M030   | 3m   | 98  | 1200659249 | 805007P03M050Y | 5m   | 133 |            |               |     |
| 29 | 1200063831 | 804007E52M100  | 10m  | 64 | 1200658604 | 804007I03M040   | 4m   | 99  | 1200659540 | 805007E03M030  | 3m   | 134 |            |               |     |
| 30 | 1200064175 | 804007E03M4001 | 40m  | 65 | 1200658614 | 803007P03M040   | 4m   | 100 | 1200657164 | 804007P03M003  | 0.3m | 135 |            |               |     |
| 31 | 1200064178 | 804007P03M005  | 0.5m | 66 | 1200658615 | 803007P03M010   | 1m   | 101 | 1200657165 | 804007P03M006  | 0.6m | 136 |            |               |     |
| 32 | 1200064280 | 804007E03M200  | 20m  | 67 | 1200658618 | 803007P03M100   | 10m  | 102 | 1200657166 | 804007P03M015  | 1.5m | 137 |            |               |     |
| 33 | 1200064294 | 804007P03M200  | 20m  | 68 | 1200658720 | 803007H09M010   | 1m   | 103 | 1200657167 | 804007P03M150  | 15m  | 138 |            |               |     |
| 34 | 1200064394 | 804007P03M020G | 2m   | 69 | 1200658721 | 803007H09M015   | 1.5m | 104 | 1200657168 | 804007P03M500  | 50m  | 139 |            |               |     |
|    |            |                |      | 70 | 1200658722 | 803007H09M020   | 2m   | 105 | 1200657169 | 804007E03M003  | 0.3m | 140 |            |               |     |

|                                                                                                                                               |  |       |  |                                                                   |  |         |  |        |  |                                |  |                |  |              |  |
|-----------------------------------------------------------------------------------------------------------------------------------------------|--|-------|--|-------------------------------------------------------------------|--|---------|--|--------|--|--------------------------------|--|----------------|--|--------------|--|
| THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION |  |       |  |                                                                   |  |         |  |        |  |                                |  |                |  |              |  |
| DIMENSION UNITS                                                                                                                               |  | SCALE |  | CURRENT REV DESC: REMOVED OBSOLETE PART NUMBERS AS PER PCN#514486 |  |         |  |        |  | <div>molex</div>               |  |                |  |              |  |
| mm                                                                                                                                            |  | 1:1   |  |                                                                   |  |         |  |        |  |                                |  |                |  |              |  |
| GENERAL TOLERANCES (UNLESS SPECIFIED)                                                                                                         |  |       |  |                                                                   |  |         |  |        |  |                                |  |                |  |              |  |
| ANGULAR TOL ± 1.0 °                                                                                                                           |  |       |  |                                                                   |  |         |  |        |  |                                |  |                |  |              |  |
| 4 PLACES ±                                                                                                                                    |  |       |  |                                                                   |  |         |  |        |  |                                |  |                |  |              |  |
| 3 PLACES ±                                                                                                                                    |  |       |  | EC NO: 774109                                                     |  |         |  |        |  | CSE M12 XP AC MA RA XM SE UNSH |  |                |  |              |  |
| 2 PLACES ± 0.05                                                                                                                               |  |       |  | DRWN: VISHAH2 2023/12/20                                          |  |         |  |        |  |                                |  |                |  |              |  |
| 1 PLACE ± 0.3                                                                                                                                 |  |       |  | CHK'D: GGA 2024/01/29                                             |  |         |  |        |  |                                |  |                |  |              |  |
| 0 PLACES ± 0.5                                                                                                                                |  |       |  | APPR: GGA 2024/01/29                                              |  |         |  |        |  | PRODUCT CUSTOMER DRAWING       |  |                |  |              |  |
| INITIAL REVISION:                                                                                                                             |  |       |  | DOCUMENT NUMBER                                                   |  |         |  |        |  | DOC TYPE                       |  | DOC PART       |  | REVISION     |  |
| DRWN: JMARSZALEK 2016/01/14                                                                                                                   |  |       |  |                                                                   |  |         |  |        |  |                                |  |                |  |              |  |
| APPR: RSILLER 2016/04/08                                                                                                                      |  |       |  | 1200659138                                                        |  |         |  |        |  | PSD                            |  | 000            |  | A8           |  |
| DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS                                                                                          |  |       |  | THIRD ANGLE PROJECTION                                            |  | DRAWING |  | SERIES |  | MATERIAL NUMBER                |  | CUSTOMER       |  | SHEET NUMBER |  |
|                                                                                                                                               |  |       |  |                                                                   |  | A3-SIZE |  | 120065 |  | SEE PART LIST                  |  | GENERAL MARKET |  | 3 OF 3       |  |

|                 |    |              |            |          |
|-----------------|----|--------------|------------|----------|
| DOCUMENT STATUS | P1 | RELEASE DATE | 2024/01/29 | 05:14:37 |
|-----------------|----|--------------|------------|----------|

|                                                             |  |  |  |  |  |  |  |  |  |   |   |   |   |   |   |   |   |   |
|-------------------------------------------------------------|--|--|--|--|--|--|--|--|--|---|---|---|---|---|---|---|---|---|
| FORMAT master-b-prod-A3<br>REVISION: J1<br>DATE: 2021/05/01 |  |  |  |  |  |  |  |  |  | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 |
|-------------------------------------------------------------|--|--|--|--|--|--|--|--|--|---|---|---|---|---|---|---|---|---|