

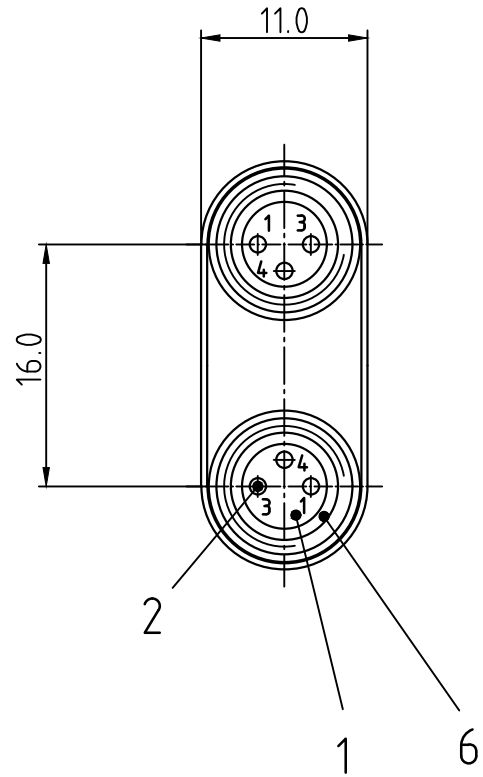
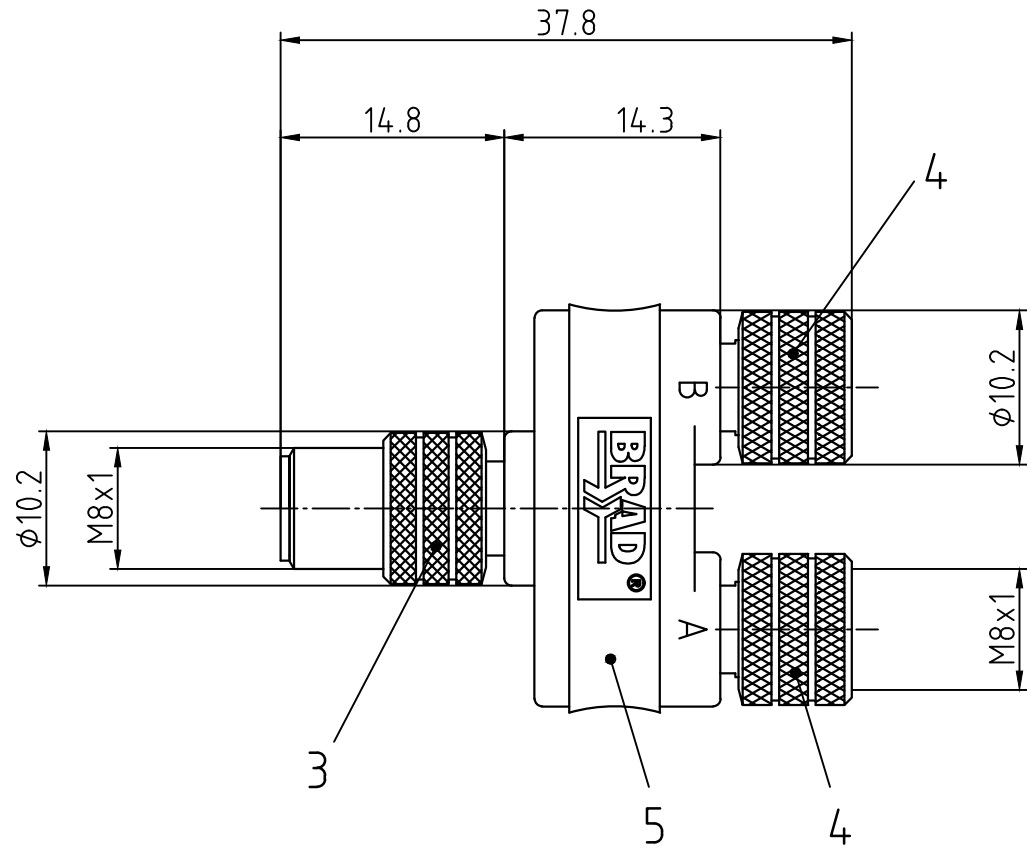


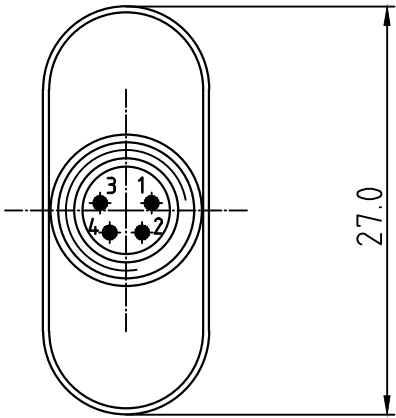

CONNECTOR SPECIFICATION: Steckverbinder-Eigenschaften:	
VOLTAGE RATING Bemessungsspannung	60V AC / 75V DC
AMPERAGE RATING Betriebsstrom	max. 3 AMPS
PROTECTION Schutzart	IP67
OPERATING TEMPERATURE Temperaturbereich	-25°C TO +90°C

POS. Pos.	COMPONENT Einzelteil	MATERIAL Material	FINISH Oberfläche
1	INSERT Kontaktträger	PUR / BLACK PUR / schwarz	- - -
2	CONTACT SOCKET Kontakt	COPPER ALLOY Kupferlegierung	GOLD-PLATED vergoldet
3	COUPLING NUT MALE Schraubverschluß Stecker	BRASS Messing	NICKEL-PLATED vernickelt
4	COUPLING NUT FEMALE Schraubverschluß Buchse	BRASS Messing	NICKEL-PLATED vernickelt
5	OVERMOULD Umspritzung	PUR / BLACK PUR /schwarz	- - -
6	O-RING (FEMALE) O-Ring (Buchse)	FPM / RED FPM / rot	- - -

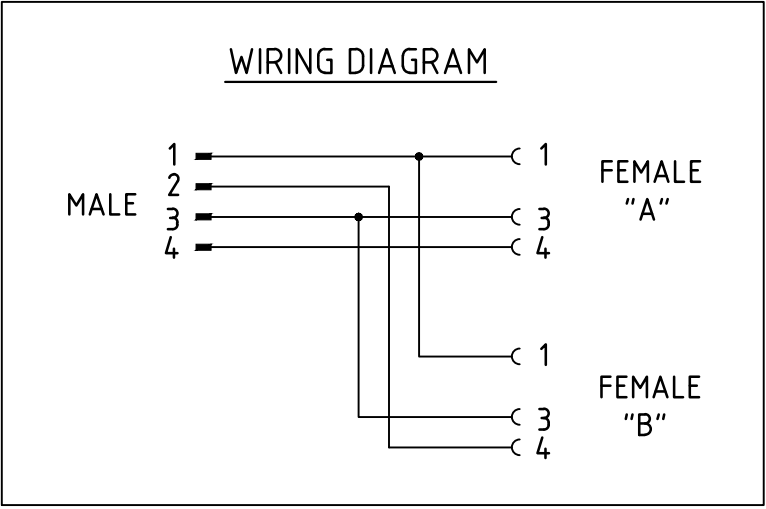

(...) INFORMATION DIMENSION
(...) Informationsmaß

ENG.-NO.: 0808-04LMF-00000

A1
PACKAGING ACCORDING TO
PACKAGING SPEC. 1201202000

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC: ADDED PACKAGING SPEC. UPDATED NEW DWG TEMPLATE		molex		
	DIMENSION UNITS	SCALE					
	MM	2:1			SPL YS M8 4P AC MA FE FE		
	GENERAL TOLERANCES (UNLESS SPECIFIED)		EC NO: 778427 DRWN: ABENJAMINLW 2024/02/22 CHK'D: RSILLER 2024/02/28 APPR: RSILLER 2024/02/28		PRODUCT CUSTOMER DRAWING		
DIVISIONAL SYMBOLS	mm		INCH		DOCUMENT NUMBER		
	4 PLACES	±----	±----	±----	SD-120089-015		
	3 PLACES	±----	±----	±----	PSD 001 A1		
	2 PLACES	±0.05	±----	±----	1200890033		
	1 PLACE	±0.3	±----	±----	GENERAL MARKET		
	0 PLACES	±0.5	±----	±----	1 OF 1		
	ANGULAR TOL ± 1.0 °		THIRD ANGLE PROJECTION				
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DRAWING				

DOCUMENT STATUS	P1	RELEASE DATE	2024/02/28 10:17:02
-----------------	----	--------------	---------------------