

A 0 7 X X X

INTERNAL CIRCUIT
WIRING CONFIGURATION
VOLTAGE AND LED COLOUR:

1= 12V
2= 24V
3= 48V
4= 115V
5= 230V



RED LED

A= 12V
B= 24V
C= 48V
D= 115V
E= 230V


GREEN LED

G= 12V
H= 24V
K= 48V
L= 115V
M= 230V

YELLOW LED

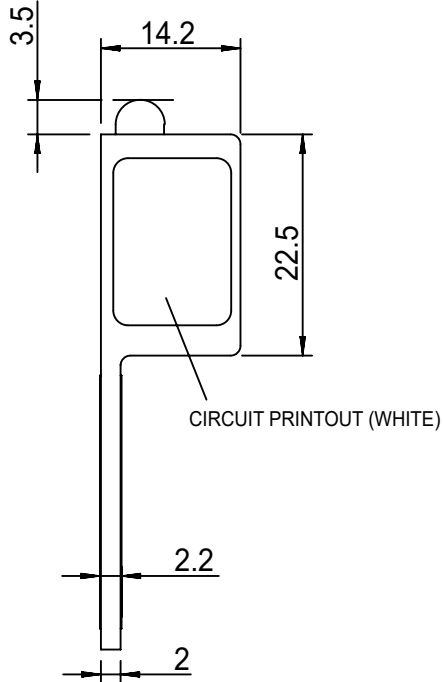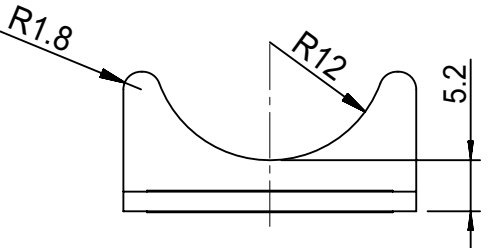

WIRING CONFIGURATION

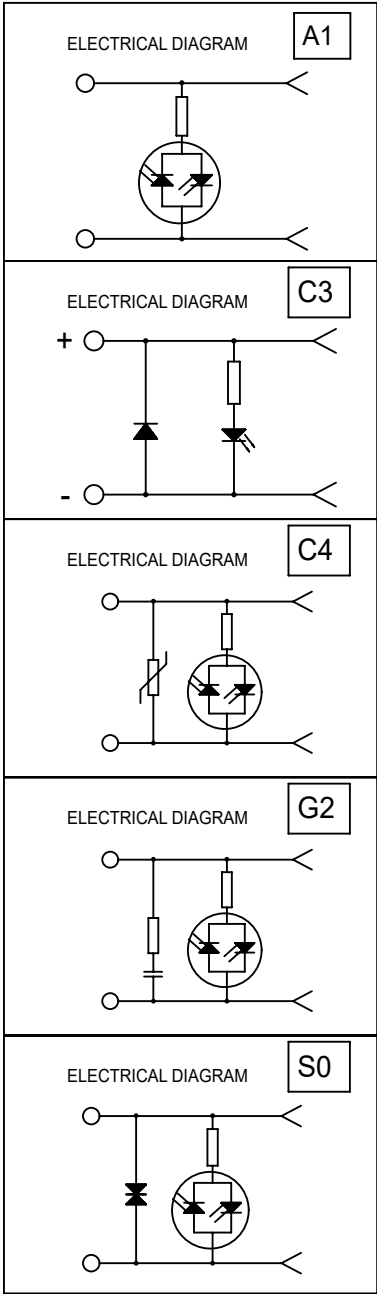

MOLEX PN	MPM PN
1210010262	A07C4H

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION															
DIMENSION UNITS		SCALE		CURRENT REV DESC: REMOVED OBSOLETE PART NUMBERS AS PER PCN#511683.				molex							
MM		NTS													
GENERAL TOLERANCES (UNLESS SPECIFIED)				MPM A07 ADAPTORS											
										MM		INCH			
4 PLACES		±								EC NO: 755035 DRWN: LIKITV CHK'D: GGA APPR: GGA 2023/03/24 2023/06/29 2023/06/29					
3 PLACES		±													
2 PLACES		±													
1 PLACE		±													
0 PLACES		±		INITIAL REVISION: DRWN: MLEVYTSKYY APPR: MWOLSZCZAK 2009/05/05 2009/05/05				DOCUMENT NUMBER A07XXX		DOC TYPE PSD		DOC PART 001		REVISION A2	
ANGULAR TOL ± °															
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				FIRST ANGLE PROJECTION 		DRAWING A3-SIZE		SERIES 121001		MATERIAL NUMBER SEE TABLE		CUSTOMER GENERAL MARKET		SHEET NUMBER 1 OF 1	

DOCUMENT STATUS	P1	RELEASE DATE	2023/06/29	13:26:41
-----------------	----	--------------	------------	----------