


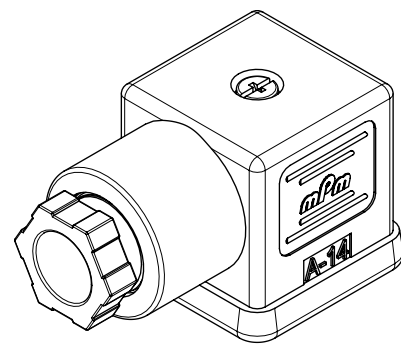

SCALE 1:1

TECHNICAL SPECIFICATION :

MAX. CURRENT : 16.0A
INSULATION RESISTANCE : 100Megaohms min.
MAX. CONDUCTOR : 1.50mm²/16AWG
MAX. VOLTAGE : 250V
CONTACT RESISTANCE : ≤15milliohms max.

CABLE DIAMETER RANGE :
PG6-M16 : 6.00-8.00mm
PG11 - G1/2"-M20 : 8.00-10.0mm


OPERATING TEMPERTURE WITH:
NITRILE RUBBER(NBR) GASKET : -40°C TO +90°C
SILICONE : -40°C TO +125°C

ENVIRONMENTAL : IP65
(IP67 AVAIABLE ON REQUEST)


BOM

ITEM	DESCRIPTION	QTY.
1	SCREW	1
2	COVER ASSEMBLY	1
3	INSERT ASSEMBLY	1
4	GASKET	1


INTEGRATED GASKET

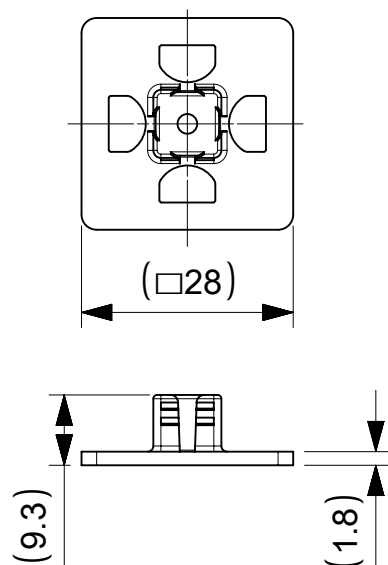


PROFIED GASKET

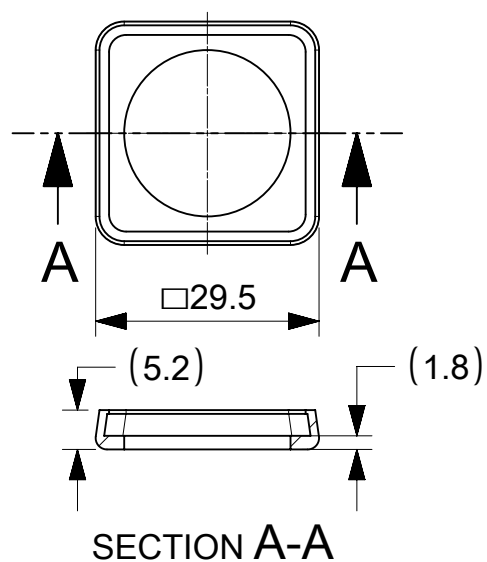




FLAT GASKET

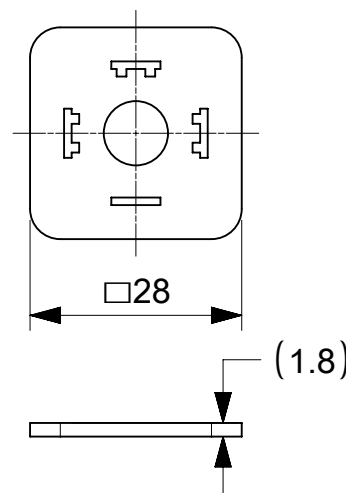


SCREW M3x29

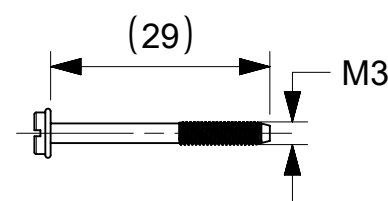

SCREW M3x30 + WASHER

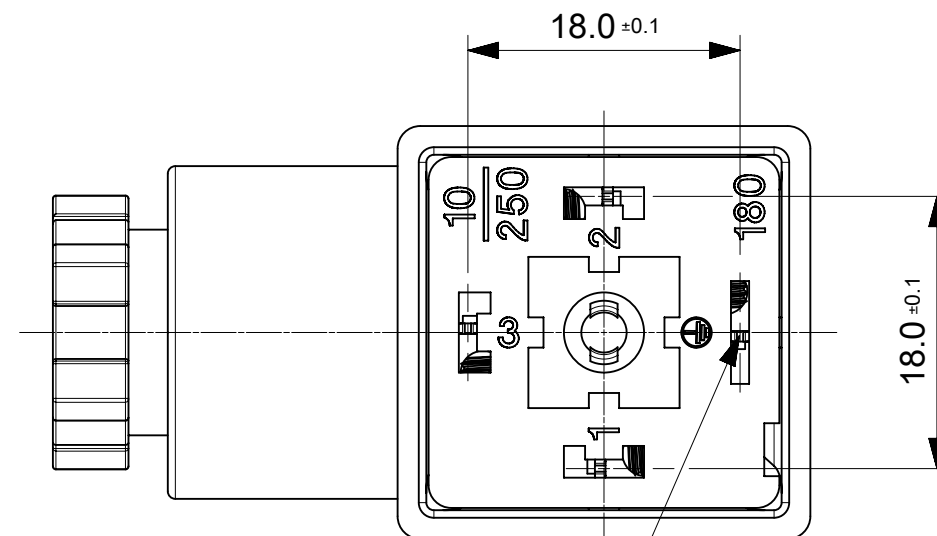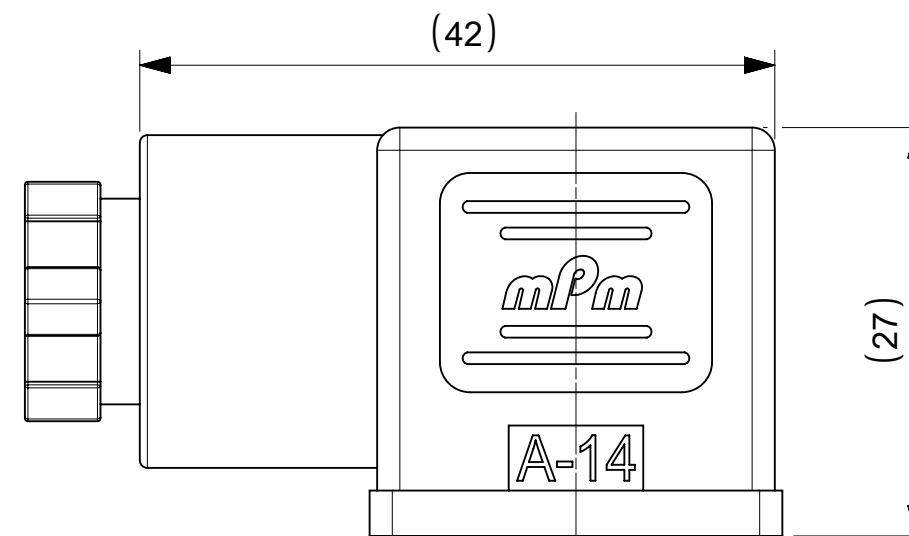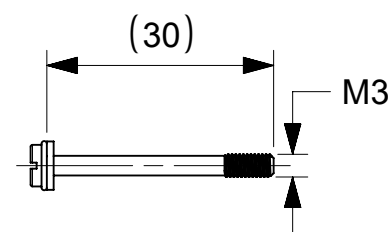


EARTH POSITION
H12 SHOWN

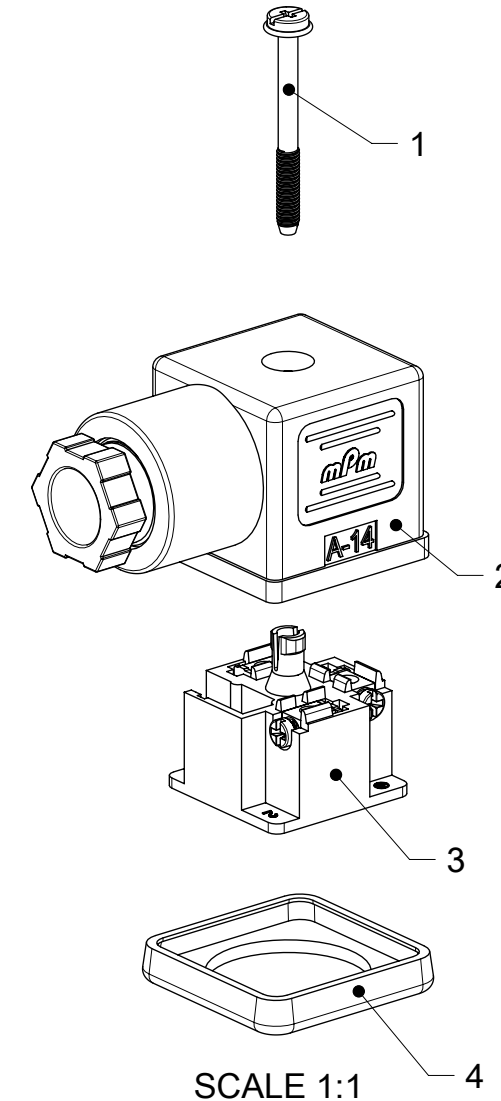


NOTES :

1. PLEASE SEE PDP 1210230229 FOR CURRENTLY CONFIGURED PART NUMBERS.
2. FOR PACKAGING SEE PACKAGING SPEC PK-121023-C18
3. PRODUCT SPEC : SEE PS-121201-001

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION															
SYMBOLS		DIMENSION UNITS		SCALE		CURRENT REV DESC:			molex						
	= 0	mm		2:1											
	= 0	GENERAL TOLERANCES (UNLESS SPECIFIED)				EC NO: 707042 DRWN: APAWLAK01 2022/05/17 CHK'D: RSILLER 2022/05/19 APPR: RSILLER 2022/05/19			C18 SERIES ASSEMBLY OPTIONS						
	= 0	ANGULAR TOL ± °													
	= 0	4 PLACES		±											
	= 0	3 PLACES		±		INITIAL REVISION: DRWN: SSM 2019/01/09 APPR: RSILLER 2019/01/15			PRODUCT CUSTOMER DRAWING						
	= 0	2 PLACES		± 0.1											
	= 0	1 PLACE		± 0.2											
	= 0	0 PLACES		±		THIRD ANGLE PROJECTION 			DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION		
	= 0	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS							DRAWING A3-SIZE		SERIES 121023		MATERIAL NUMBER SEE 1210230229 PDP		CUSTOMER GENERAL MARKET

C18 SERIES MATRIX

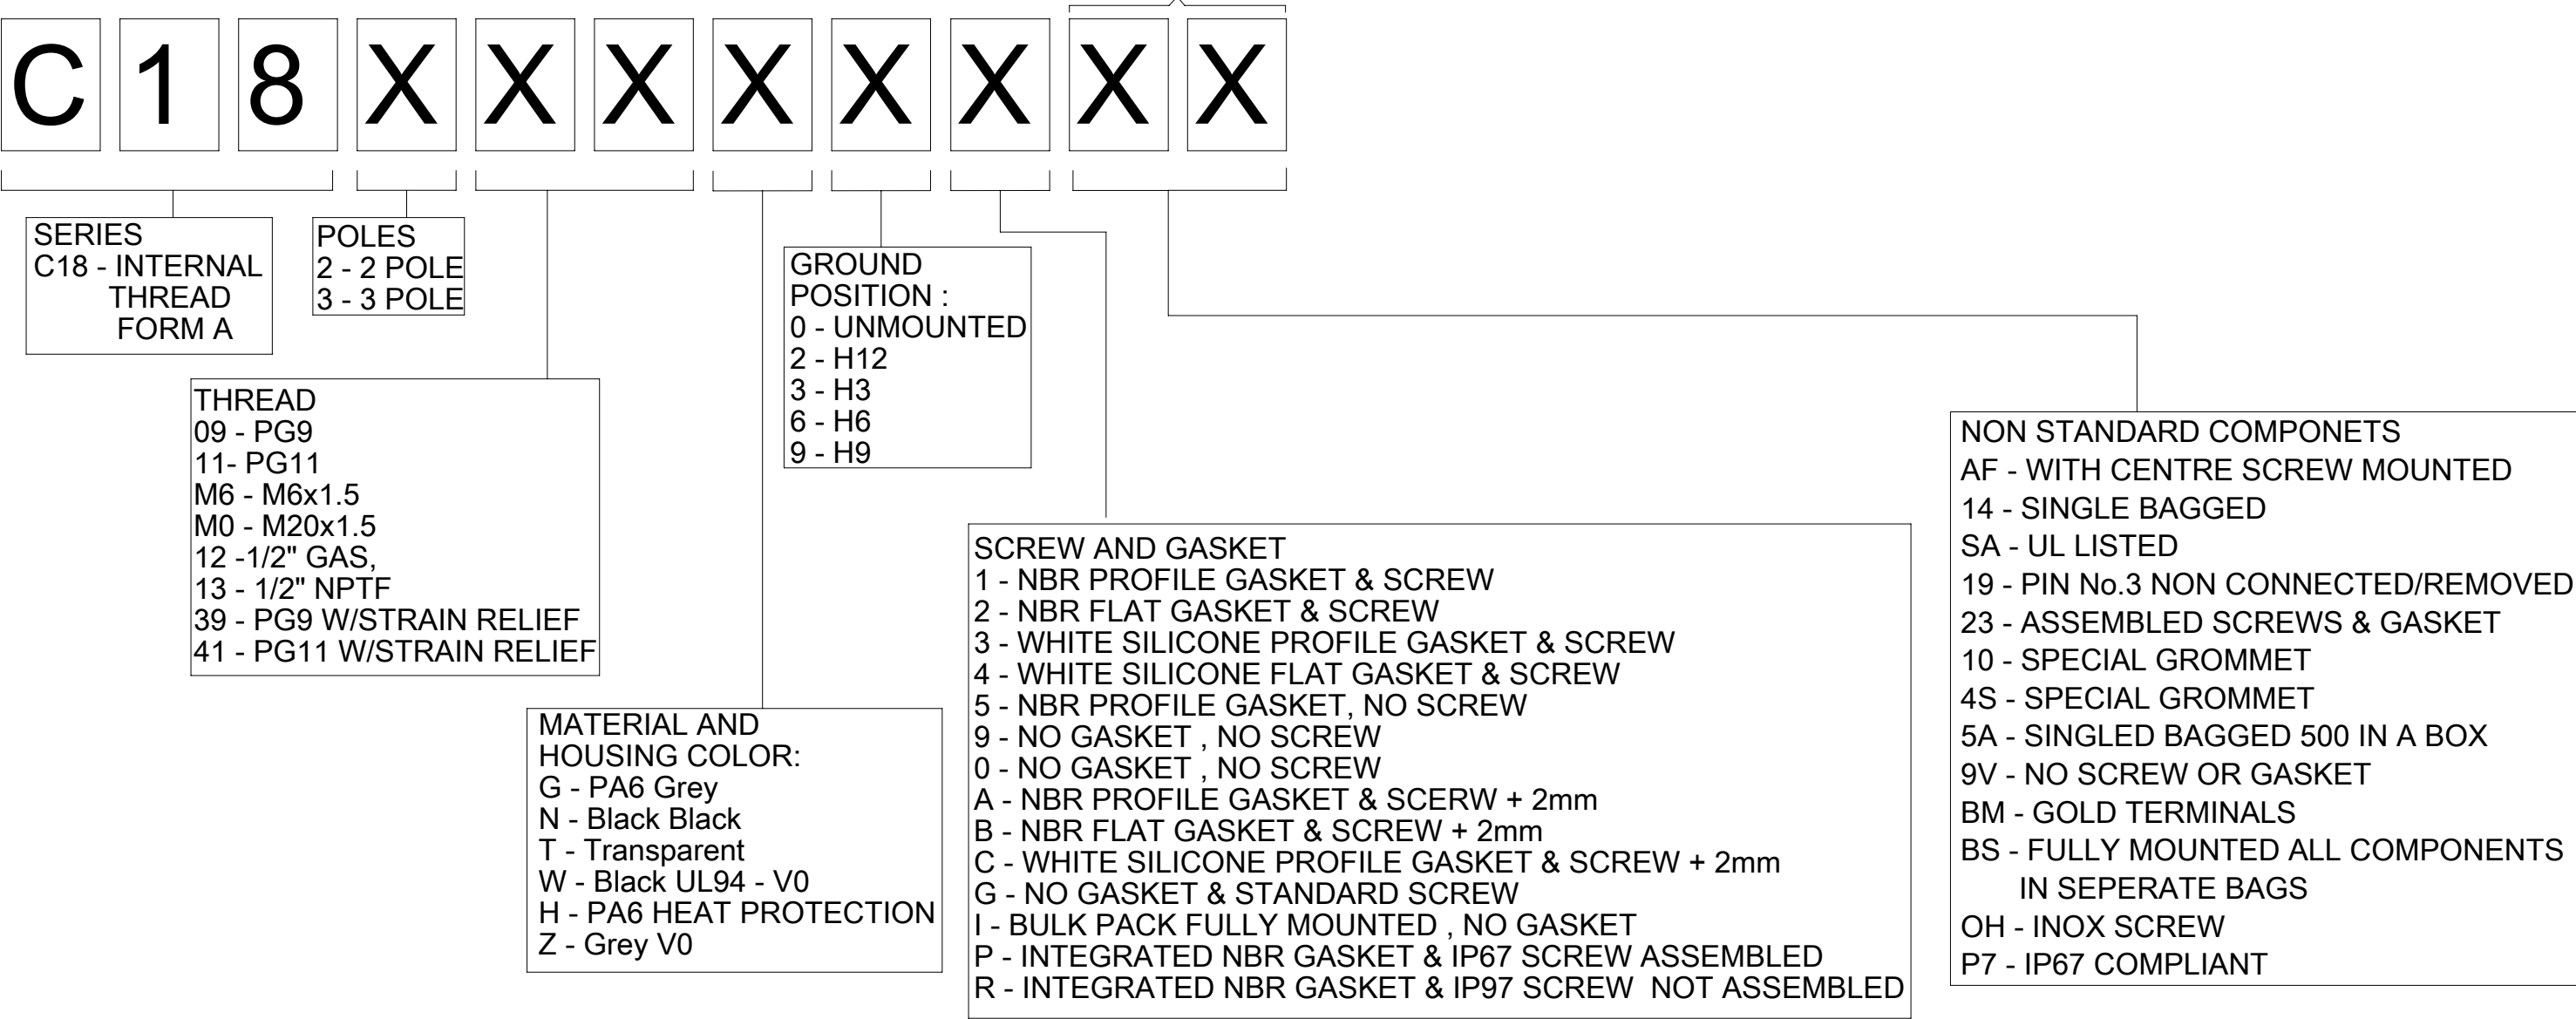







SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
	DIMENSION UNITS	SCALE	CURRENT REV DESC:
	= 0	mm	1:1
	= 0	GENERAL TOLERANCES (UNLESS SPECIFIED)	
	= 0	ANGULAR TOL	± °
	= 0	4 PLACES	±
	= 0	3 PLACES	±
	= 0	2 PLACES	± 0.1
	= 0	1 PLACE	± 0.2
	= 0	0 PLACES	±
= 0	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION
= 0			DRAWING
		SERIES	121023
		MATERIAL NUMBER	SEE 1210230229 PDP
		CUSTOMER	GENERAL MARKET
		SHEET NUMBER	2 OF 2

molex

C18 SERIES ASSEMBLY OPTIONS

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
1210230229	PSD	000	A1

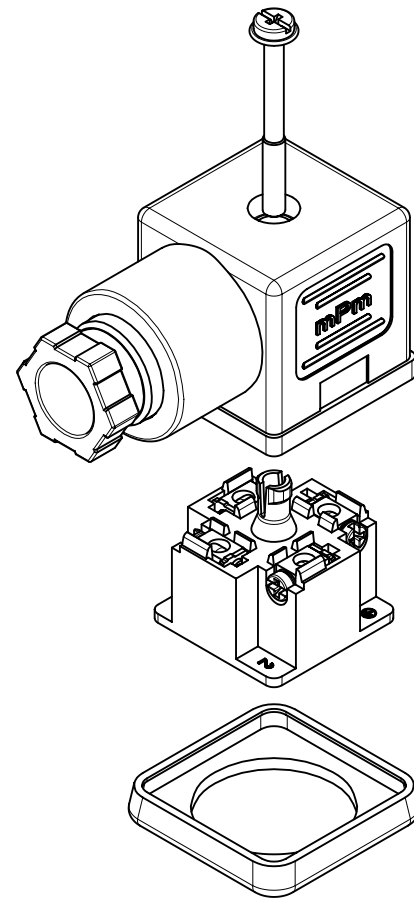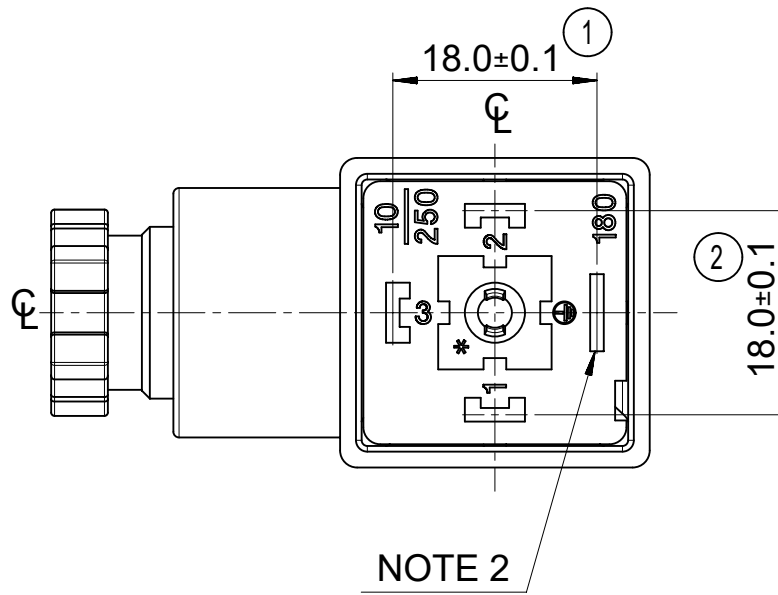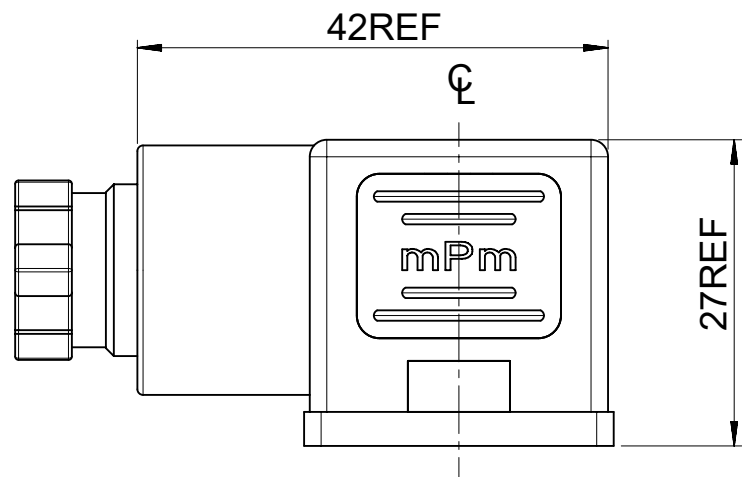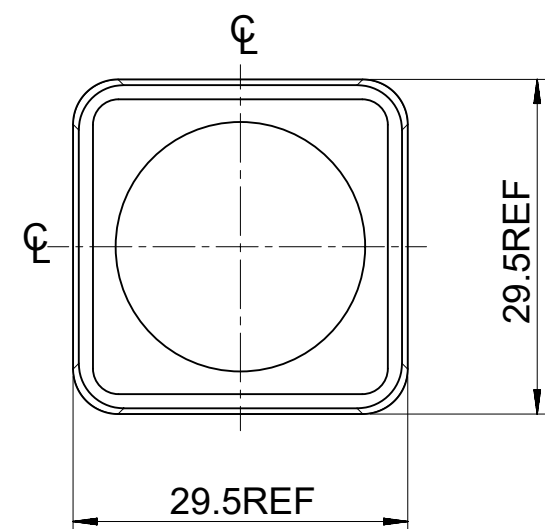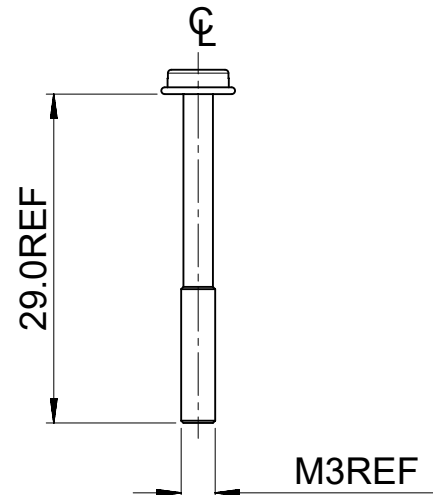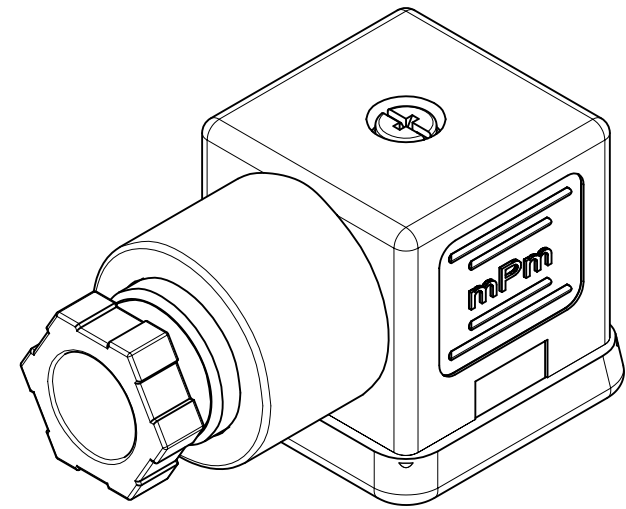

ITEM	DESCRIPTION
1	SCREW
2	COVER ASSEMBLY
3	INSERT ASSEMBLY
4	GASKET

C18209N21**

SERIES
C18= INTERNAL THREAD FORM A
POLES
2= 2 POLE & 3= 3 POLE
THREAD SIZE
09= PG9, 11= PG11, M6= M16x1.5, M0= M20x1.5, 12= 1/2" GAS, 13= 1/2" NPTF
39= PG9 W/STRAIN RELIEF, 41= PG11 W/STRAIN RELIEF
MATERIAL AND HOUSING COLOUR
G = PA6 GRAY, H= PA6 HEAT PROTECTION,
N= PA6 BLACK, W= PA66 BLACK V0, T= TRANSPARENT
GROUND POSITION
0= UNMOUNTED, 2= H12, 3= H3, 6= H6 & 9= H9

SCREW AND GASKET
1= NBR PROFILE GASKET & SCREW
2= NBR FLAT GASKET & SCREW
3= WHITE SILICONE PROFILE GASKET & SCREW
4= WHITE SILICONE FLAT GASKET & SCREW
5= NBR PROFILE GASKET, NO SCREW
9= NO GASKET, NO SCREW
0= NO GASKET, NO SCREW
A= NBR PROFILE GASKET & SCREW +2mm
B= NBR FLAT GASKET & SCREW +2mm
C= WHITE SILICONE PROFILE GASKET & SCREW +2mm
G= NO GASKET & STANDARD SCREW
I= BULK PACK FULLY MOUNTED, NO GASKET
P= INTEGRATED NBR GASKET & IP67 SCREW ASSEMBLED
R= INTEGRATED NBR GASKET & IP67 SCREW NOT ASSEMBLED

NON STANDARD COMPONENTS
14= SINGLE BAG
19= PIN NO.3 NON CONNECTED/REMOVED,
23= ASSEMBLED SCREWS & GASKET
10= SPECIAL GROMMET
4S= SPECIAL GROMMET
5A= SINGLE BAGGED 500 IN A BOX
9V= NO SCREW OR GASKET
AF= CENTRE SCREW MOUNTED
BM= GOLD TERMINALS
BS= FULLY UNMOUNTED ALL COMPONENTS IN SEPARATE BAGS
OH= INOX SCREW
P7= IP67 COMPLIANT
SA= UL LISTED PART

NOTES

- PLEASE SEE SHEET 2 FOR CURRENTLY CONFIGURED PART NUMBERS, FOR SPECIFIC PART NUMBERS PLEASE CONTACT SALES OR CONSULT THE INTELLIGENT PART NUMBERS IN THE TABLE ATTACHED
- EARTH POSITION SHOWN, H12.
- FOR PACKAGING SEE PACKAGING SPEC PK-121023-C18
- PRODUCT SPEC: SEE PS-121201-001

LAST INSPECTION NUMBER 2

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION															
F A = 0 F C = 0 F P = 0	DIMENSION UNITS		SCALE		CURRENT REV DESC: REMOVED OBSOLETE PART NUMBERS AS PER PCN#513405			molex								
	mm		1.5:1													
	GENERAL TOLERANCES (UNLESS SPECIFIED)				EC NO: 784316 DRWN: VISHAH2 CHK'D: GGA APPR: GGA 2024/04/19 2024/05/13 2024/05/13			C18 SERIES INTERNAL THREAD								
		MM	INCH													
	4 PLACES	±	±													
	3 PLACES	±	±													
	2 PLACES	±	0.1	±												
DIVISIONAL SYMBOLS	1 PLACE	±	0.2	±	INITIAL REVISION:			PRODUCT CUSTOMER DRAWING								
	0 PLACES	±	±													
	ANGULAR TOL				±	°	DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION					
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	
						A2-SIZE		121023		SEE TABLE		GENERAL MARKET		1 OF 2		

<