


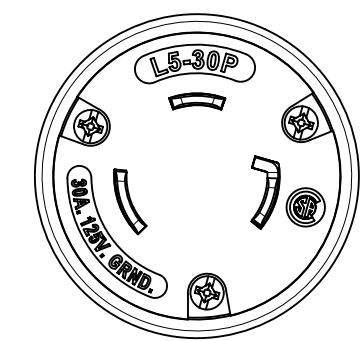

The diagram shows the rear panel of the device. On the left, there is a power switch and a power cord. On the right, there are several ports, including a USB port, a FireWire port, and a FireWire Mini port. The ports are labeled with their respective symbols.

$$(2.64)$$

3.01 —

LINE

LENGTH "L" +/- 2.0

4.77


- FRONT LABEL
(THREE PARTS)

– CABLE (YELLOW) 10 AWG 3 CONDUCTOR 300V –
TYPE SJEOOW UL LISTED FOR U.S. AND EITHER
CUL LISTED OR CSA CERTIFIED FOR CANADA

LOAD

– LENGTH "A"

– (3.76)

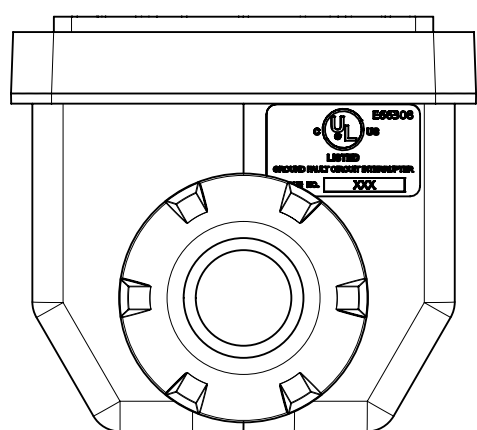

Ø 1.62

LINE


$$- (7.19)$$

LOAD

☐ .10

$$(2.60)$$

TEST INSTRUCTIONS LABEL

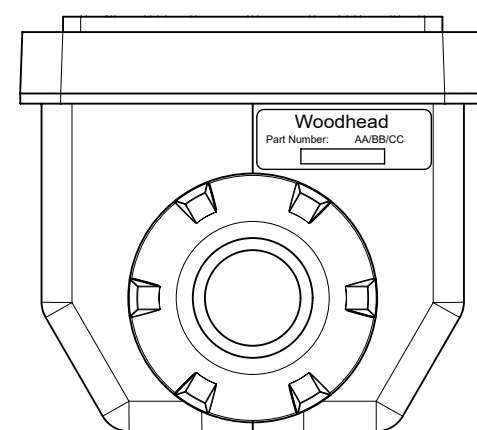

LISTED:	cULus
RATED SUPPLY VOLTAGE:	120VAC
RATED CURRENT:	UP TO 30 AMPS
RESET TYPE:	AUTOMATIC OR MANUAL
OPERATING FREQUENCY:	60 Hz
TYPE:	CLASS A
GROUND TRIP CURRENT:	5mA +/- 1mA
PHASE	SINGLE PHASE
OVERLOAD CURRENT:	180 AMPS, 0.45PF
INSULATION VOLTAGE:	1,500 VRMS - 1 MINUTE
ENDURANCE OPERATIONS:	3000 OPERATIONS
ENCLOSURE:	TYPE 4X, IP69K (SINGLE PHASE)

MATERIAL NO.	ENGINEERING NO.	LENGTH "L"	LENGTH "A"	POWER-UP
1301530164	30051-1A	2 FT 9.4 IN.	1 FT	AUTO
1301530171	30051-6A	7 FT 9.4 IN.	6 FT	AUTO
1301530168	30051-25A	26 FT 9.4 IN.	25 FT	AUTO
1301530165	30051-1M	2 FT 9.4 IN.	1 FT	MANUAL
1301530172	30051-6M	7 FT 9.4 IN.	6 FT	MANUAL
1301530169	30051-25M	26 FT 9.4 IN.	25 FT	MANUAL

DOCUMENT STATUS	P1	RELEASE DATE	2024/06/13	17:03:32
-----------------	----	--------------	------------	----------