


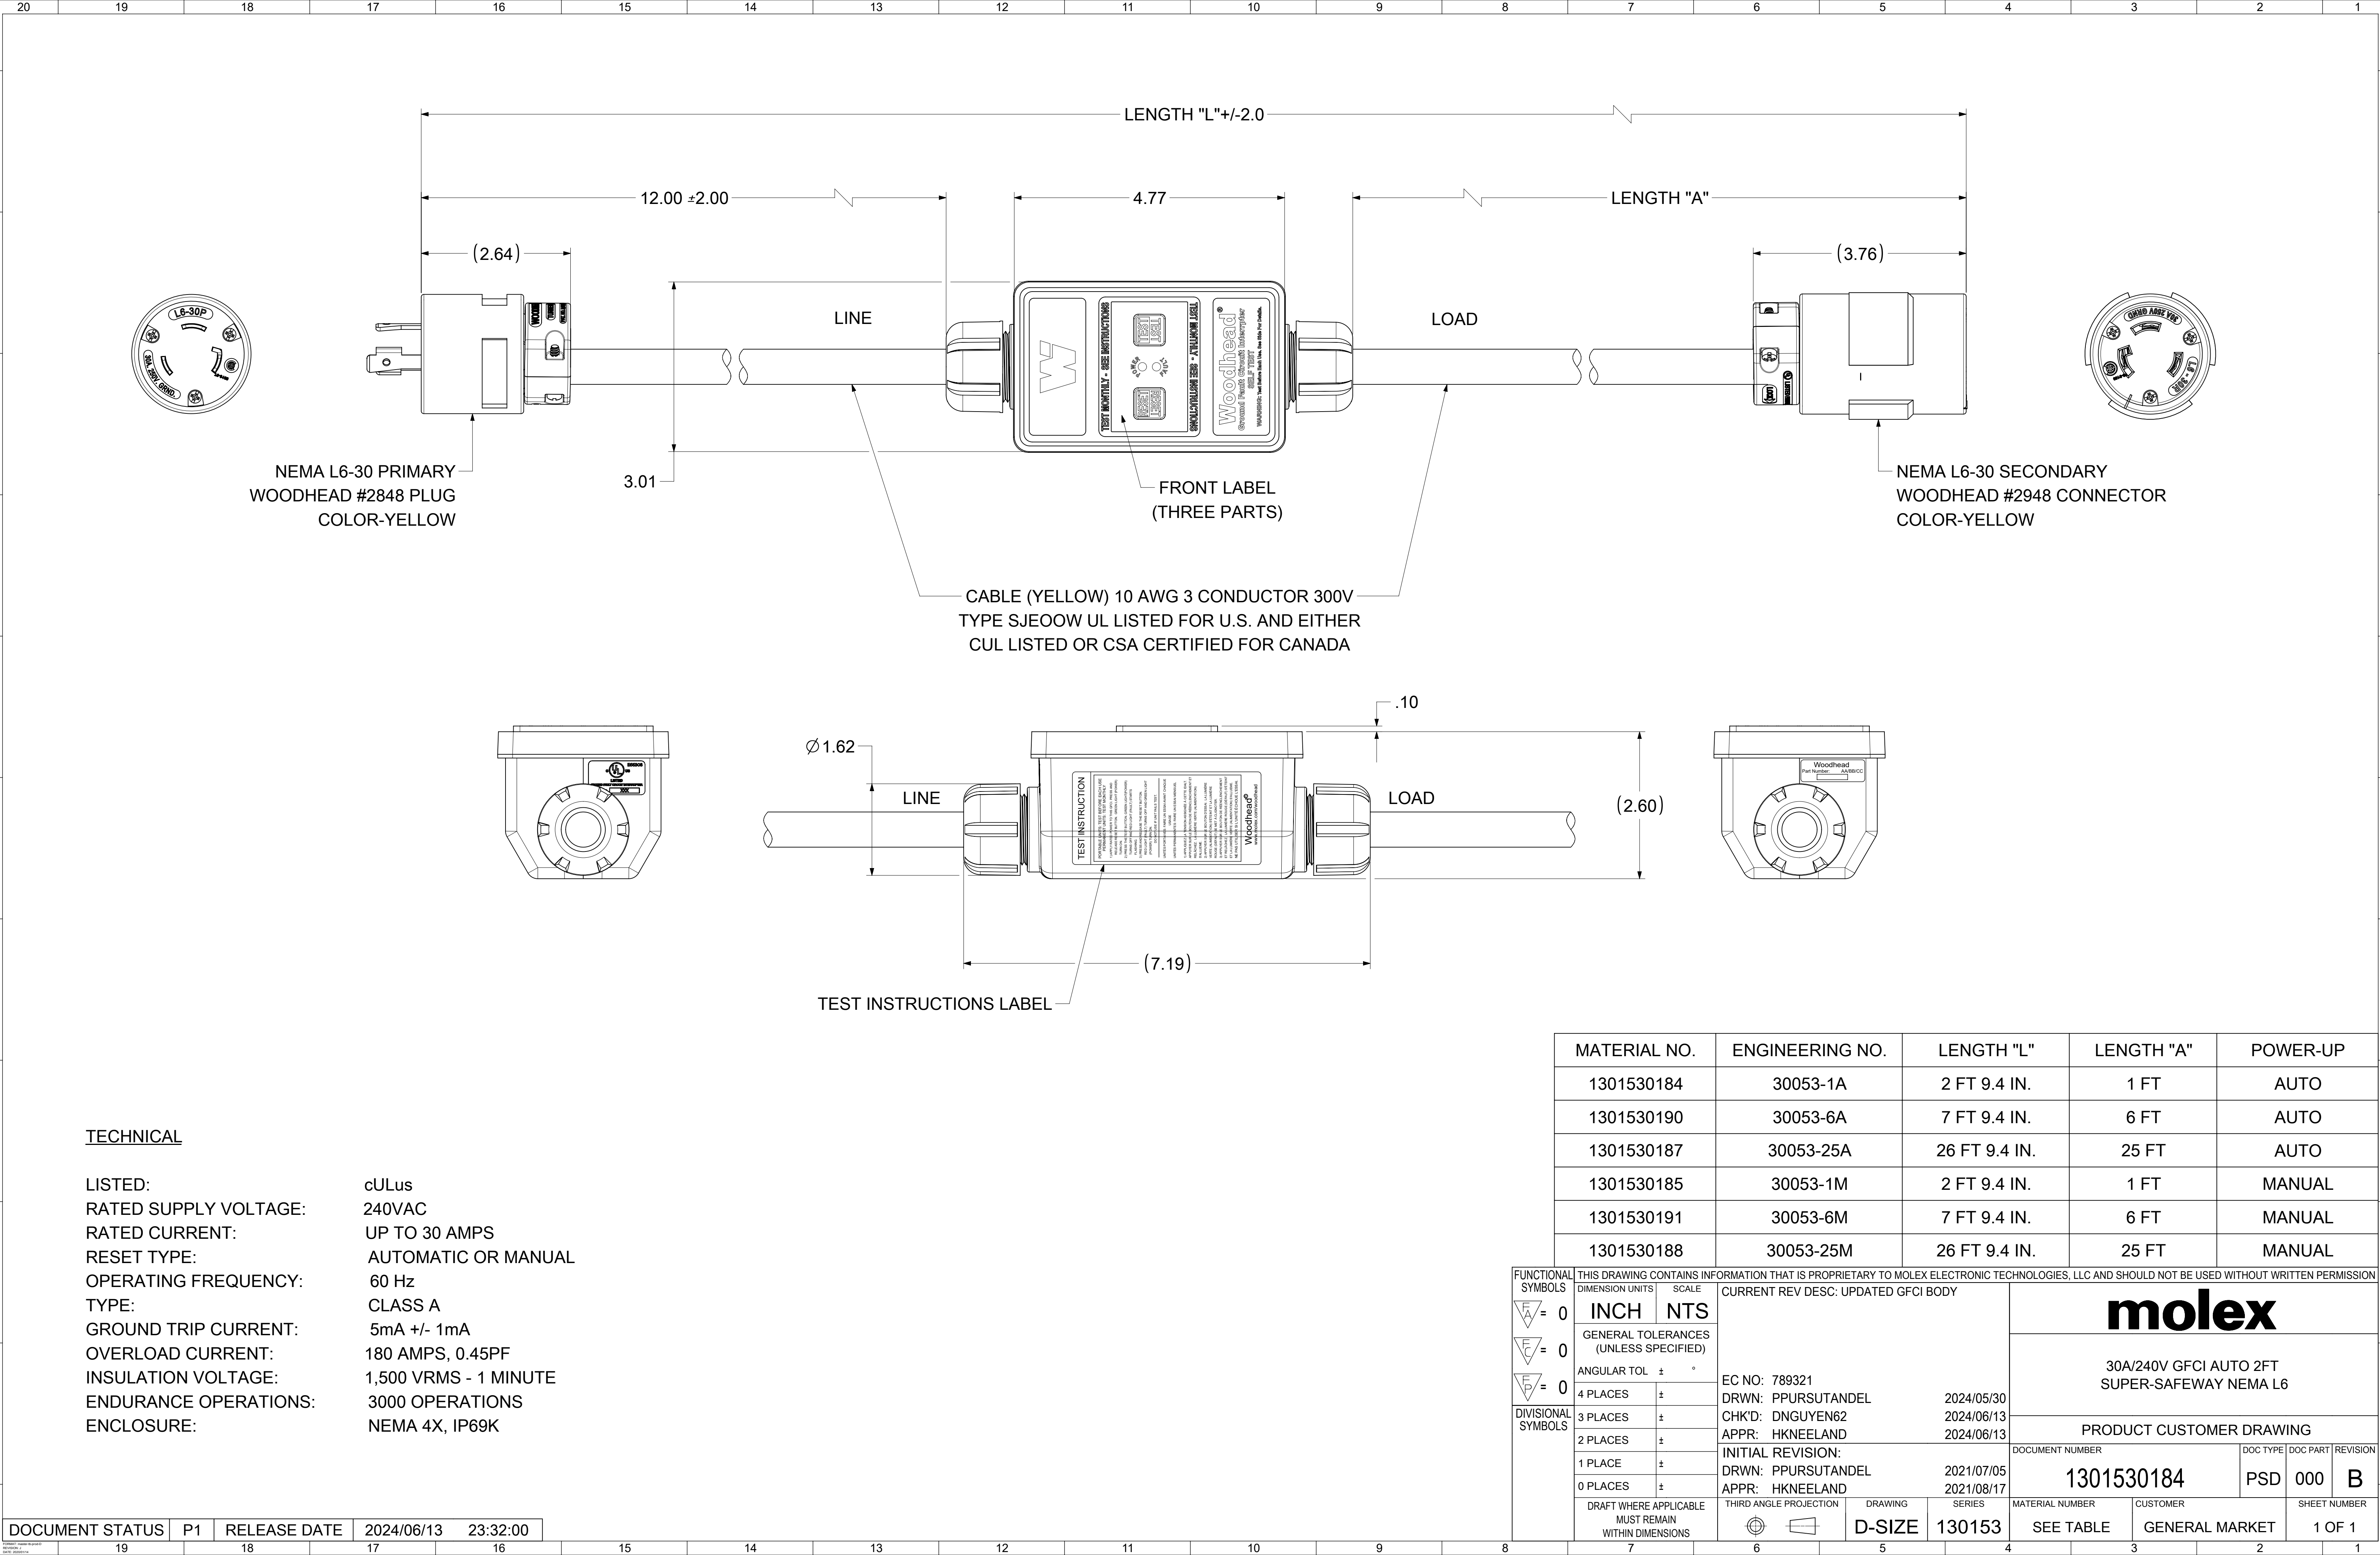

TECHNICAL

LISTED:	cULus
RATED SUPPLY VOLTAGE:	240VAC
RATED CURRENT:	UP TO 30 AMPS
RESET TYPE:	AUTOMATIC OR MANUAL
OPERATING FREQUENCY:	60 Hz
TYPE:	CLASS A
GROUND TRIP CURRENT:	5mA +/- 1mA
OVERLOAD CURRENT:	180 AMPS, 0.45PF
INSULATION VOLTAGE:	1,500 VRMS - 1 MINUTE
ENDURANCE OPERATIONS:	3000 OPERATIONS
ENCLOSURE:	NEMA 4X, IP69K

MATERIAL NO.	ENGINEERING NO.	LENGTH "L"	LENGTH "A"	POWER-UP
1301530184	30053-1A	2 FT 9.4 IN.	1 FT	AUTO
1301530190	30053-6A	7 FT 9.4 IN.	6 FT	AUTO
1301530187	30053-25A	26 FT 9.4 IN.	25 FT	AUTO
1301530185	30053-1M	2 FT 9.4 IN.	1 FT	MANUAL
1301530191	30053-6M	7 FT 9.4 IN.	6 FT	MANUAL
1301530188	30053-25M	26 FT 9.4 IN.	25 FT	MANUAL

FUNCTIONAL SYMBOLS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION													
FA = 0 FC = 0 FP = 0		DIMENSION UNITS		SCALE		CURRENT REV DESC: UPDATED GFCI BODY				molex					
		INCH		NTS											
		GENERAL TOLERANCES (UNLESS SPECIFIED)													
DIVISIONAL SYMBOLS		ANGULAR TOL		± °		EC NO: 789321 DRWN: PPURSUTANDEL 2024/05/30 CHK'D: DNGUYEN62 2024/06/13 APPR: HKNEELAND 2024/06/13				30A/240V GFCI AUTO 2FT SUPER-SAFEWAY NEMA L6					
		4 PLACES		±											
		3 PLACES		±											
		2 PLACES		±						PRODUCT CUSTOMER DRAWING					
		1 PLACE		±											
		0 PLACES		±											
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING		SERIES		DOCUMENT NUMBER		DOC TYPE		DOC PART		REVISION	
				D-SIZE		130153		1301530184		PSD		000		B	
								SEE TABLE		GENERAL MARKET				1 OF 1	

molex

30A/240V GFCI AUTO 2FT
SUPER-SAFEWAY NEMA L6

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
1301530184	PSD	000	B

DOCUMENT STATUS	P1	RELEASE DATE	2024/06/13	23:32:00
-----------------	----	--------------	------------	----------