


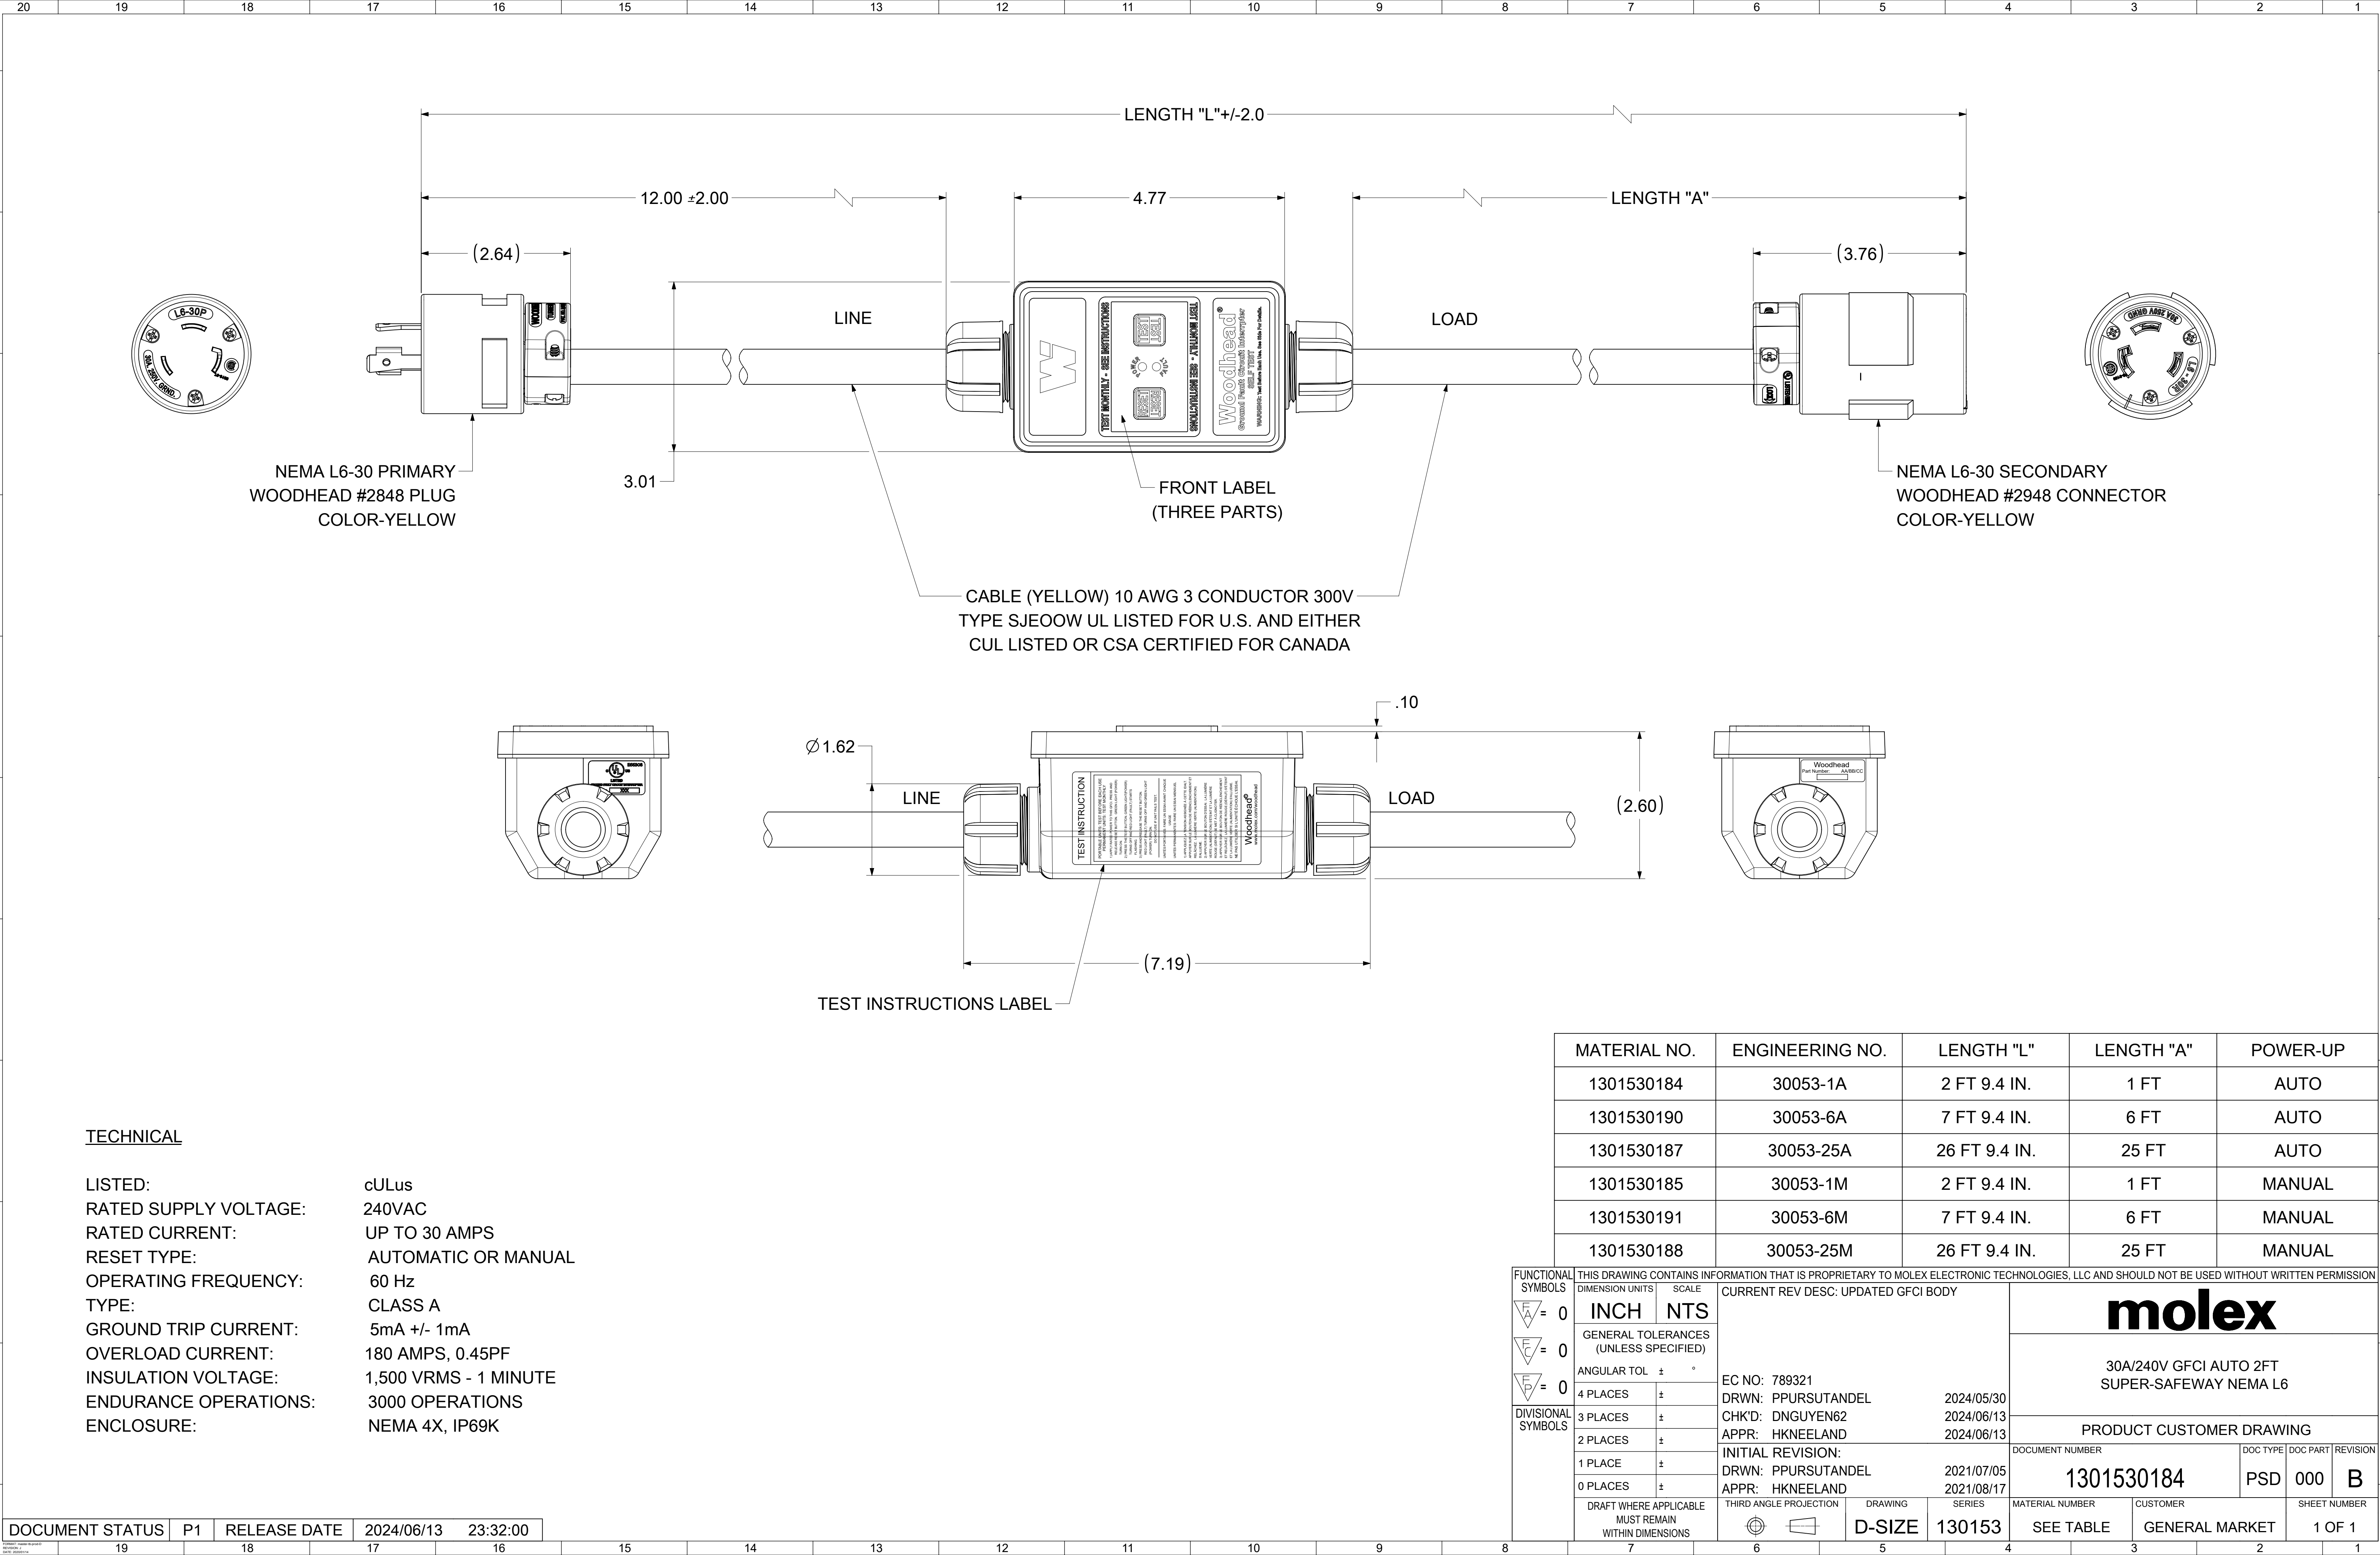

TECHNICAL

LISTED: cULus
RATED SUPPLY VOLTAGE: 240VAC
RATED CURRENT: UP TO 30 AMPS
RESET TYPE: AUTOMATIC OR MANUAL
OPERATING FREQUENCY: 60 Hz
TYPE: CLASS A
GROUND TRIP CURRENT: 5mA +/- 1mA
OVERLOAD CURRENT: 180 AMPS, 0.45PF
INSULATION VOLTAGE: 1,500 VRMS - 1 MINUTE
ENDURANCE OPERATIONS: 3000 OPERATIONS
ENCLOSURE: NEMA 4X, IP69K

MATERIAL NO.	ENGINEERING NO.	LENGTH "L"	LENGTH "A"	POWER-UP
1301530184	30053-1A	2 FT 9.4 IN.	1 FT	AUTO
1301530190	30053-6A	7 FT 9.4 IN.	6 FT	AUTO
1301530187	30053-25A	26 FT 9.4 IN.	25 FT	AUTO
1301530185	30053-1M	2 FT 9.4 IN.	1 FT	MANUAL
1301530191	30053-6M	7 FT 9.4 IN.	6 FT	MANUAL
1301530188	30053-25M	26 FT 9.4 IN.	25 FT	MANUAL

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																
F_A = 0	DIMENSION UNITS		SCALE		CURRENT REV DESC: UPDATED GFCI BODY					molex							
	INCH		NTS														
F_C = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)				30A/240V GFCI AUTO 2FT SUPER-SAFEWAY NEMA L6												
F_P = 0	ANGULAR TOL ± °																
DIVISIONAL SYMBOLS	4 PLACES		±		EC NO: 789321					2024/05/30							
	3 PLACES		±		DRWN: PPURSUTANDEL												
	2 PLACES		±		CHK'D: DNGUYEN62					2024/06/13							
	1 PLACE		±		APPR: HKNEELAND					2024/06/13							
	0 PLACES		±		INITIAL REVISION:					2021/07/05							
					DRWN: PPURSUTANDEL												
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES		DOCUMENT NUMBER		DOC TYPE		DOC PART		REVISION	
						D-SIZE		130153		1301530184		PSD		000		B	
										SEE TABLE		GENERAL MARKET				1 OF 1	

DOCUMENT STATUS	P1	RELEASE DATE	2024/06/13	23:32:00
-----------------	----	--------------	------------	----------