
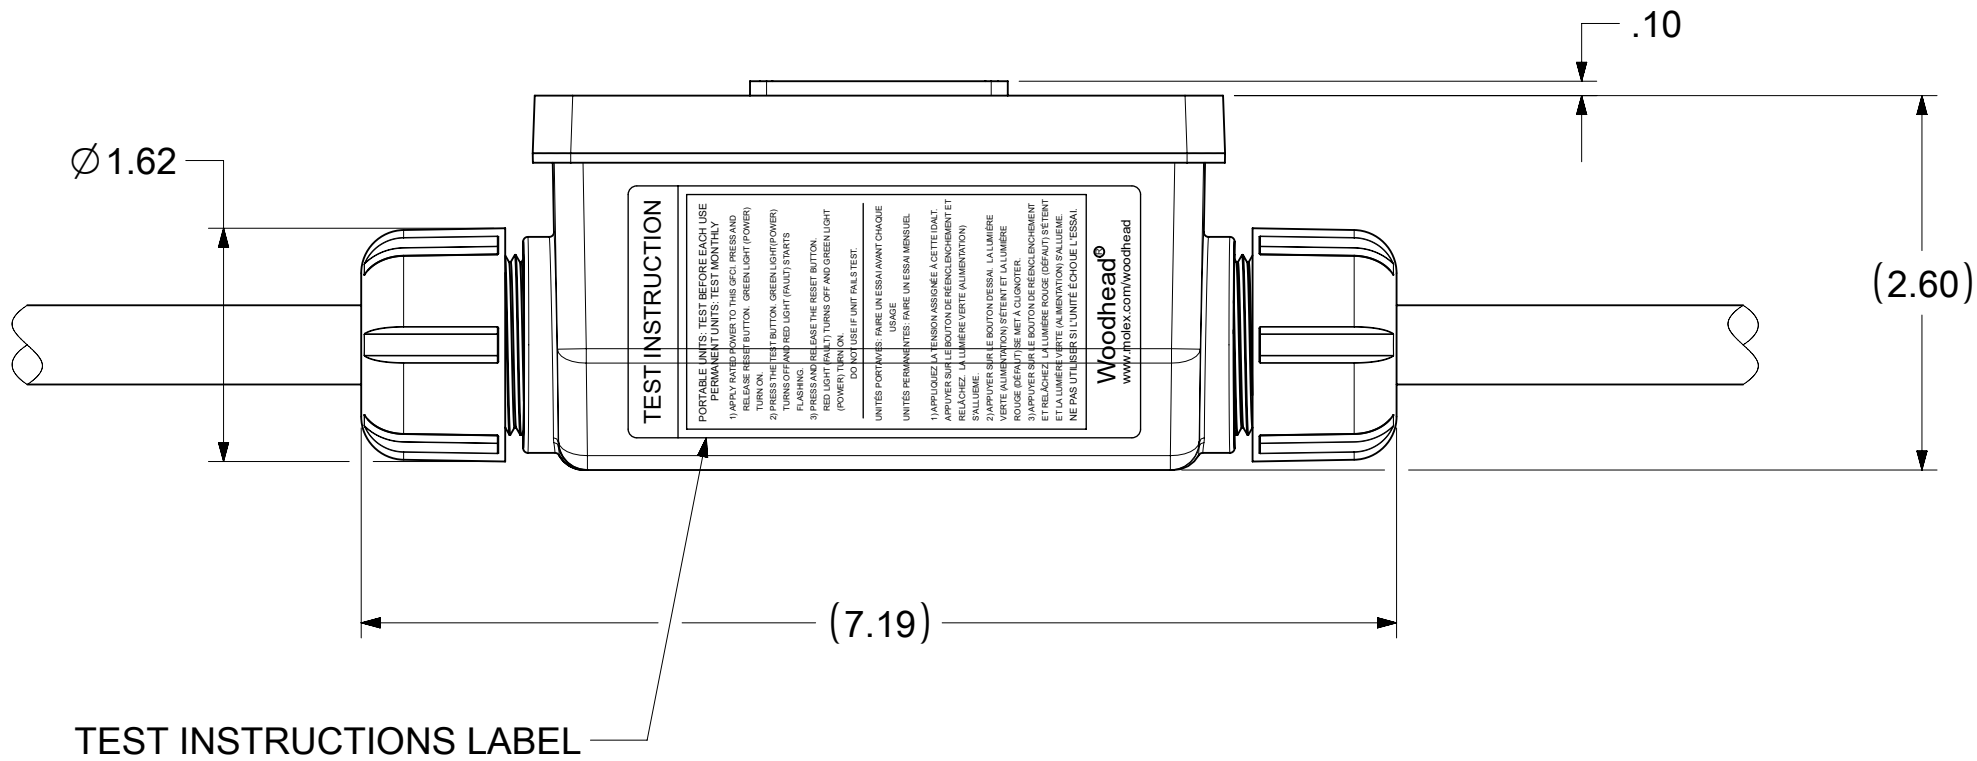


SPLIT PHASE (120 / 208 VOLTS, 120 / 240 VOLTS) (4-WIRE)

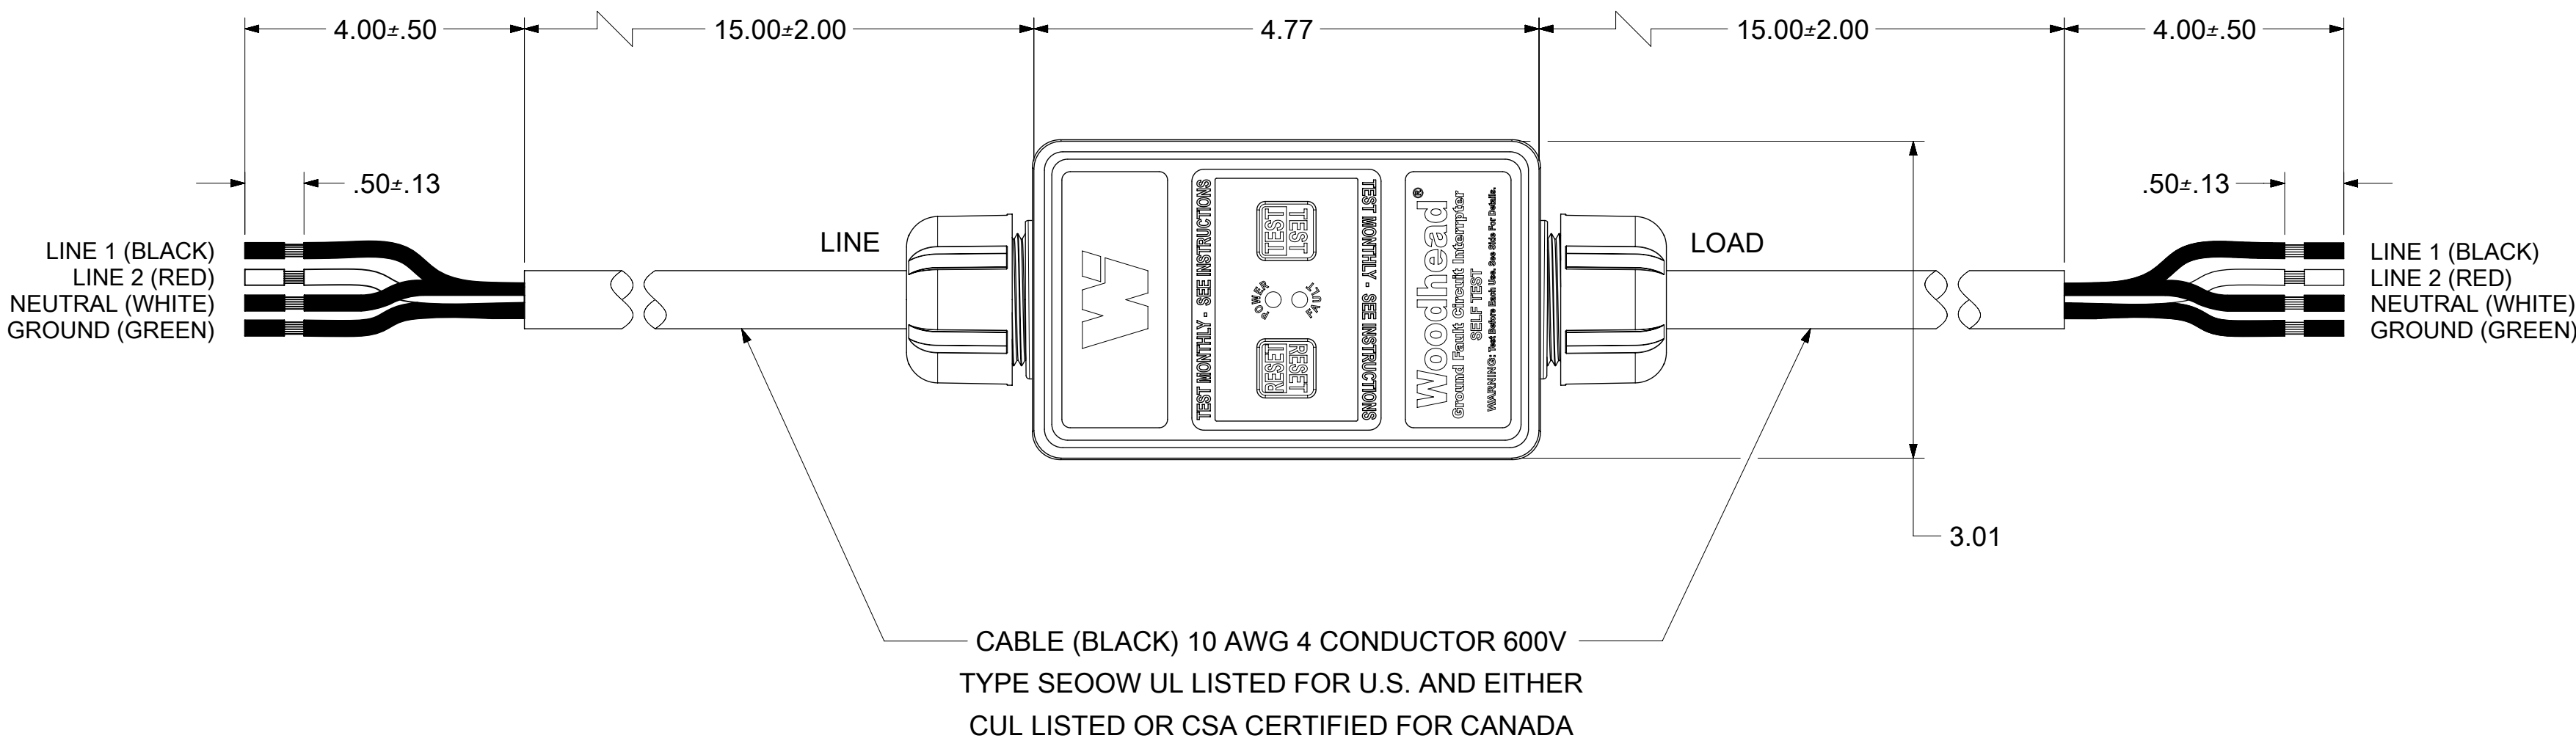

TECHNICAL

LISTED: UL & cCSAus
RATED SUPPLY VOLTAGE: 120/208VAC, 120/240VAC
RATED CURRENT: UP TO 30 AMPS
RESET TYPE: AUTOMATIC OR MANUAL
OPERATING FREQUENCY: 60 Hz
TYPE: CLASS A
GROUND TRIP CURRENT: 5mA +/- 1mA
OVERLOAD CURRENT: 180 AMPS, 0.45PF
INSULATION VOLTAGE: 1,500 VRMS - 1 MINUTE
ENDURANCE OPERATIONS: 3000 OPERATIONS
ENCLOSURE: NEMA 4X/6P (MULTIPHASE)

OLD DOCUMENT NO. SD-130153-040

RESET TYPE	MATERIAL NO.	ENGINEERING NO.	NORTH SHORE SAFETY NO	PHASE
MANUAL	1301530247	30053-0M6P	PGFI-C30AN	SPLIT PHASE
AUTOMATIC	1301530251	30053-0A6P	PGFI-C31AN	SPLIT PHASE

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION														
	DIMENSION UNITS		SCALE		CURRENT REV DESC: UPDATED TO NEW GFCI VERSION.				molex 30A, 120/240VAC INLINE GFCI SPLIT PHASE #10/4 CABLE						
	INCH		NTS												
	GENERAL TOLERANCES (UNLESS SPECIFIED)				EC NO: 788654 DRWN: PPURSUTANDEL 2024/05/30 CHK'D: DNGUYEN62 2024/06/11 APPR: HKNEELAND 2024/06/13				PRODUCT CUSTOMER DRAWING						
	MM	INCH													
4 PLACES	±	±													
3 PLACES	±	±													
2 PLACES	±	±													
DIVISIONAL SYMBOLS	1 PLACE				INITIAL REVISION:				DOCUMENT NUMBER						
	0 PLACES				DRWN: PPURSUTANDEL 2021/07/21 APPR: HKNEELAND 2021/07/29				DOC TYPE DOC PART REVISION						
	ANGULAR TOL ± °								1301530247 PSD 000 C						
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER
						C-SIZE		130153		SEE TABLE		GENERAL MARKET		1 OF 1	

[illegible]