
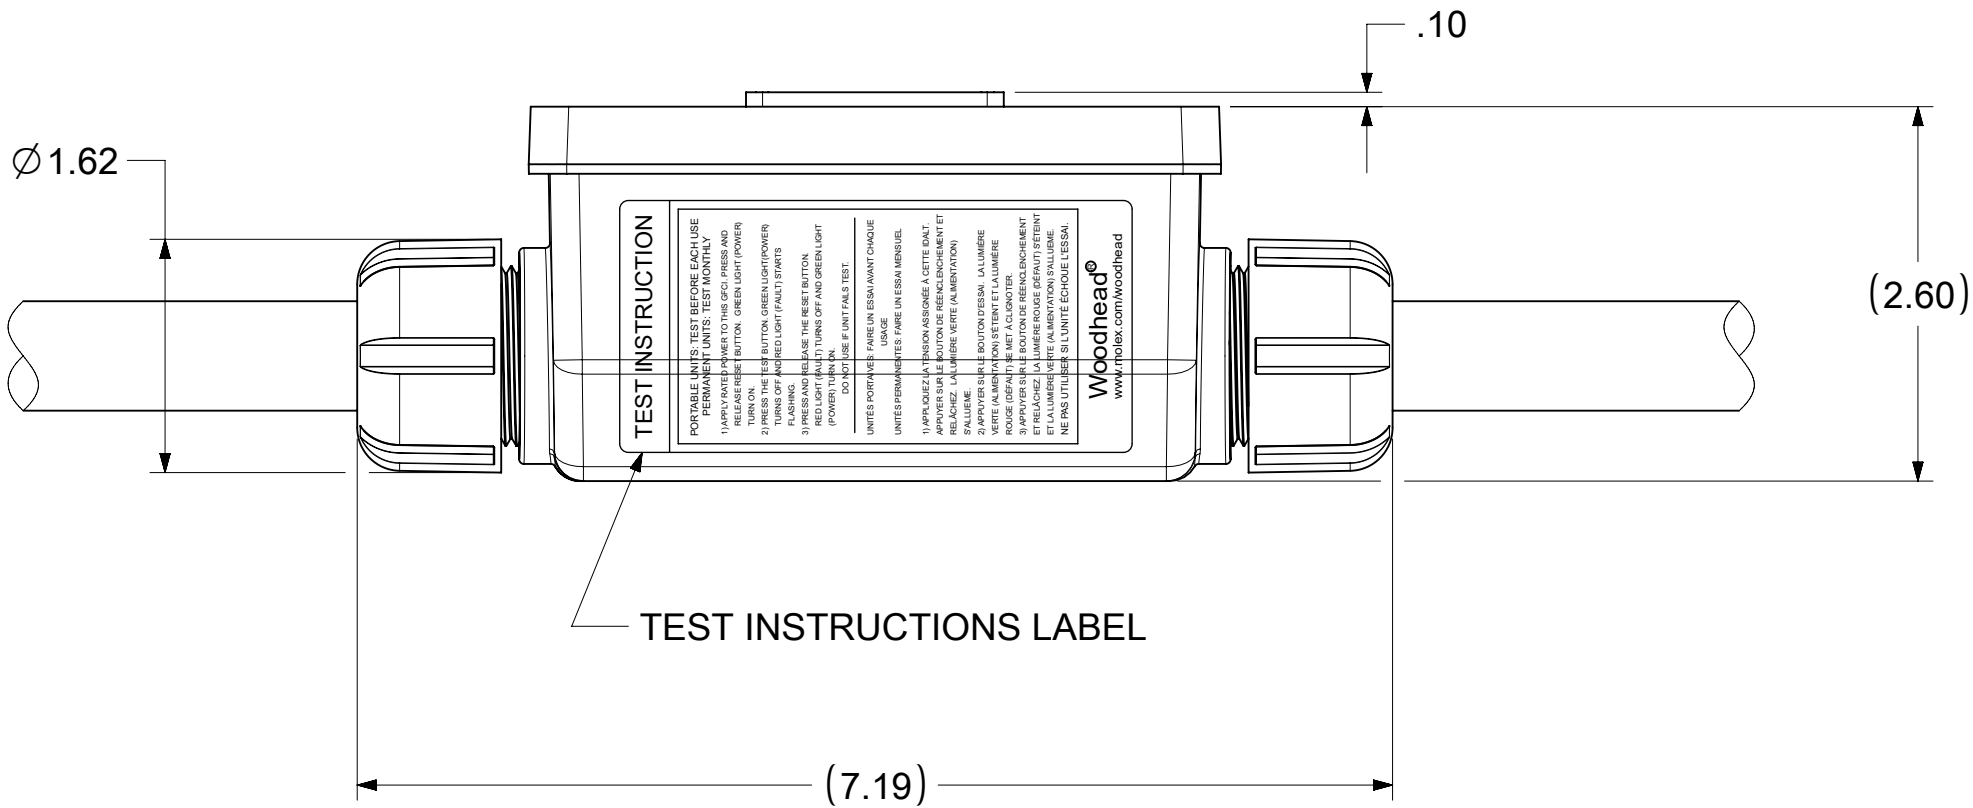


THREE PHASE (WITH NEUTRAL) (120 / 208 VOLTS) (5-WIRE)

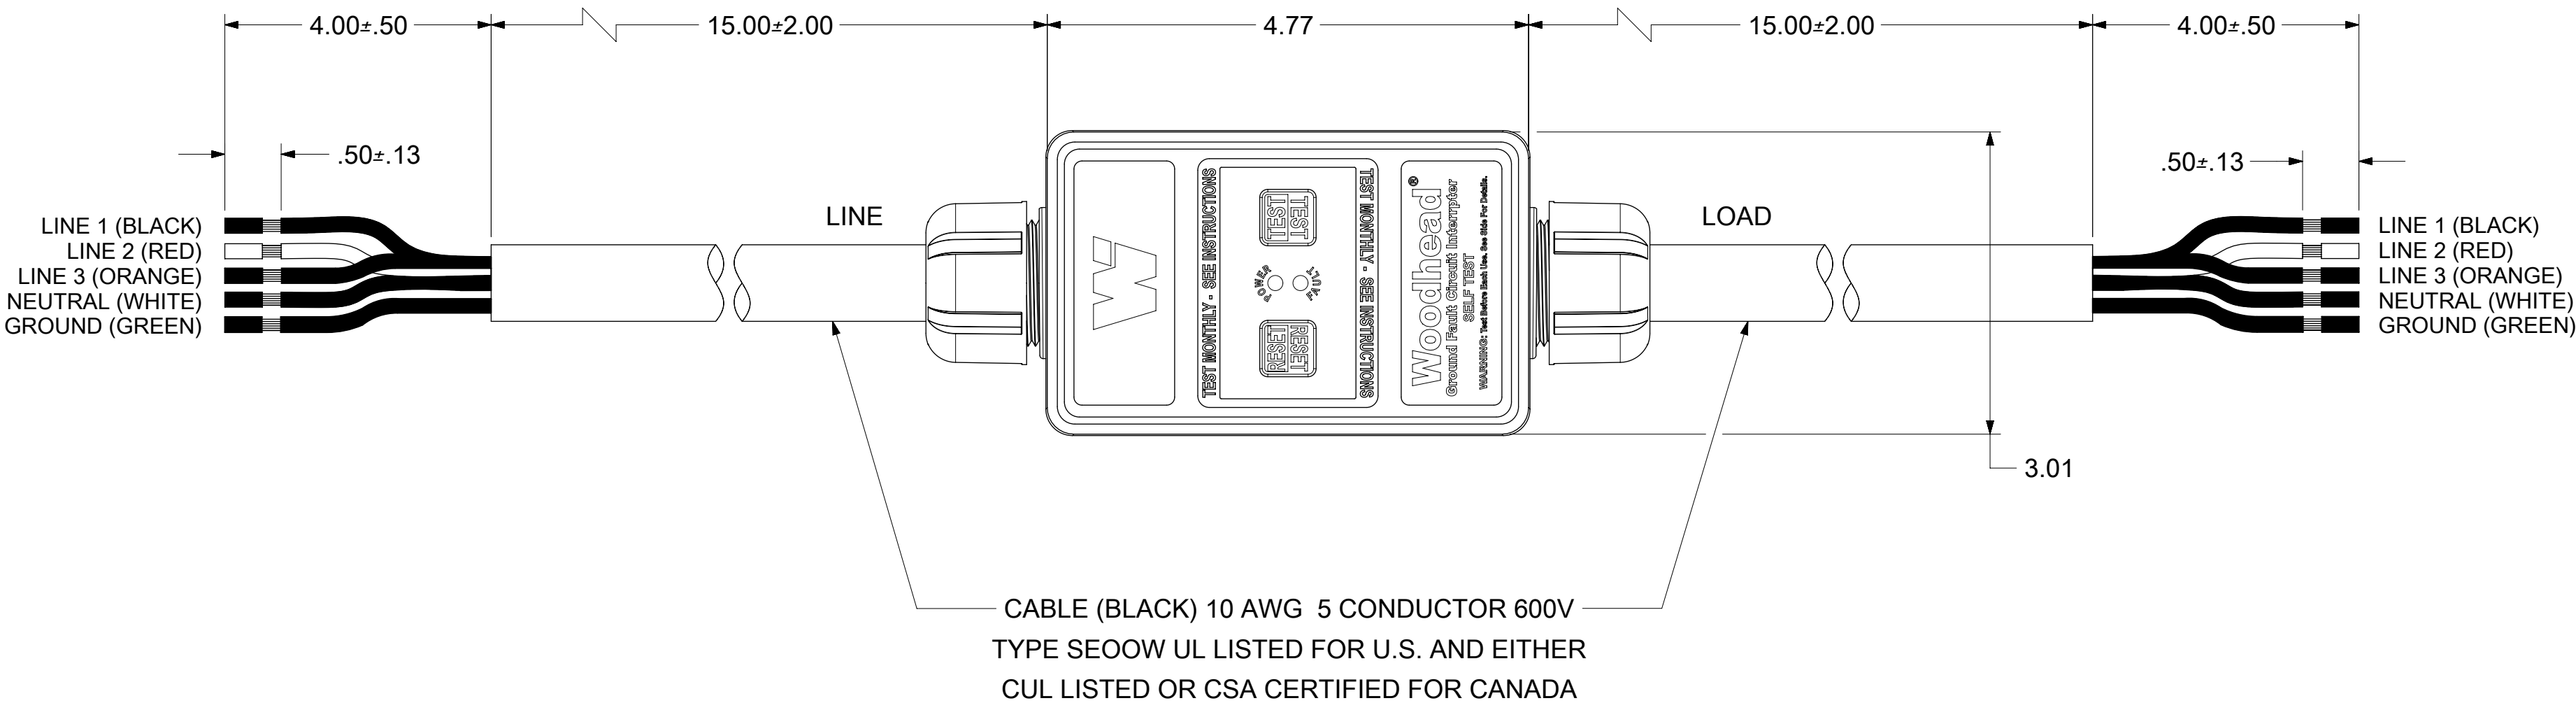

TECHNICAL

LISTED:	UL & cCSAus
RATED SUPPLY VOLTAGE:	120/208VAC
RATED CURRENT:	UP TO 30 AMPS
RESET TYPE:	AUTOMATIC OR MANUAL
OPERATING FREQUENCY:	60 Hz
TYPE:	CLASS A
GROUND TRIP CURRENT:	5mA +/- 1mA
PHASE	MULTIPHASE
OVERLOAD CURRENT:	180 AMPS, 0.45PF
INSULATION VOLTAGE:	1,500 VRMS - 1 MINUTE
ENDURANCE OPERATIONS:	3000 OPERATIONS
ENCLOSURE:	NEMA 4X, 6P (MULTIPHASE)

OLD DOCUMENT NO. SD-130153-040

RESET TYPE	MATERIAL NO.	ENGINEERING NO.	NORTH SHORE SAFETY NO	PHASE
MANUAL	1301530250	30053-0M5P	PGFI-430AN	THREE PHASE W/ NEUTRAL
AUTOMATIC	1301530254	30053-0A5P	PGFI-431AN	THREE PHASE W/ NEUTRAL

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
F A = 0 F C = 0 F P = 0 DIVISIONAL SYMBOLS	DIMENSION UNITS	SCALE		CURRENT REV DESC: UPDATED TO THE NEW GFCI VERSION.			molex			
	INCH	NTS								
	GENERAL TOLERANCES (UNLESS SPECIFIED)									
		MM	INCH				30A, 120/208VAC, 3PHASE, 2' 10/5			
	4 PLACES	±	±							
	3 PLACES	±	±							
	2 PLACES	±	±	PRODUCT CUSTOMER DRAWING						
	1 PLACE	±	±							
	0 PLACES	±	±	DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION		
	ANGULAR TOL		±	°	1301530250		PSD	000	C	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER		SHEET NUMBER	
				C-SIZE	130153	SEE TABLE	GENERAL MARKET		1 OF 1	

[illegible]