
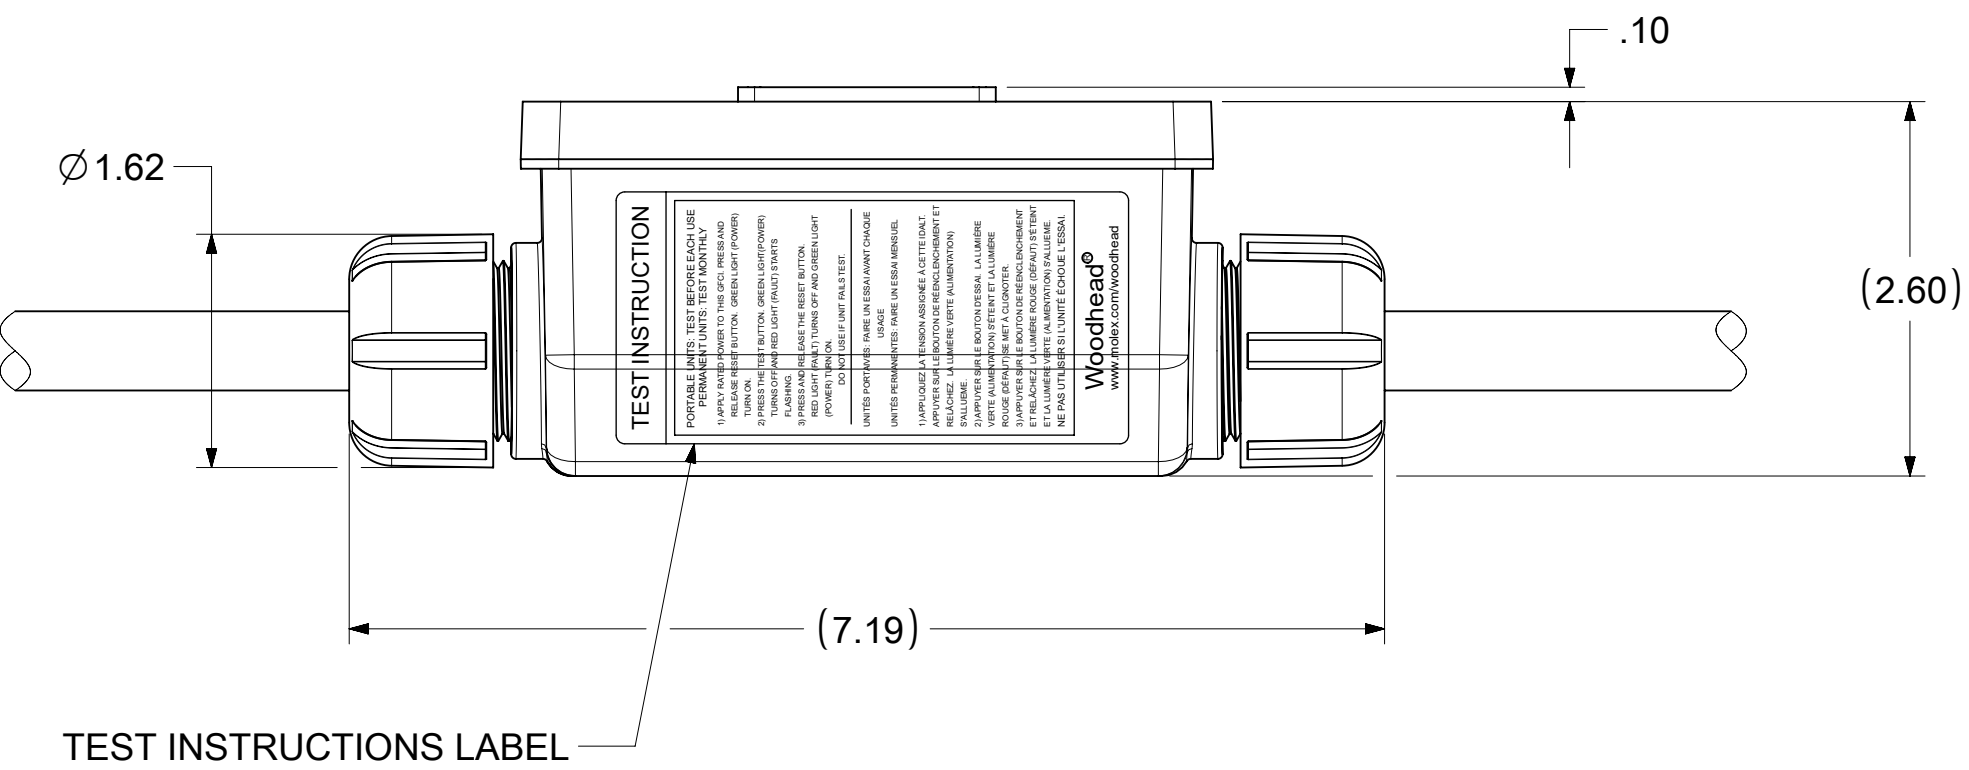


SPLIT PHASE (120 / 208 VOLTS, 120 / 240 VOLTS) (4-WIRE)

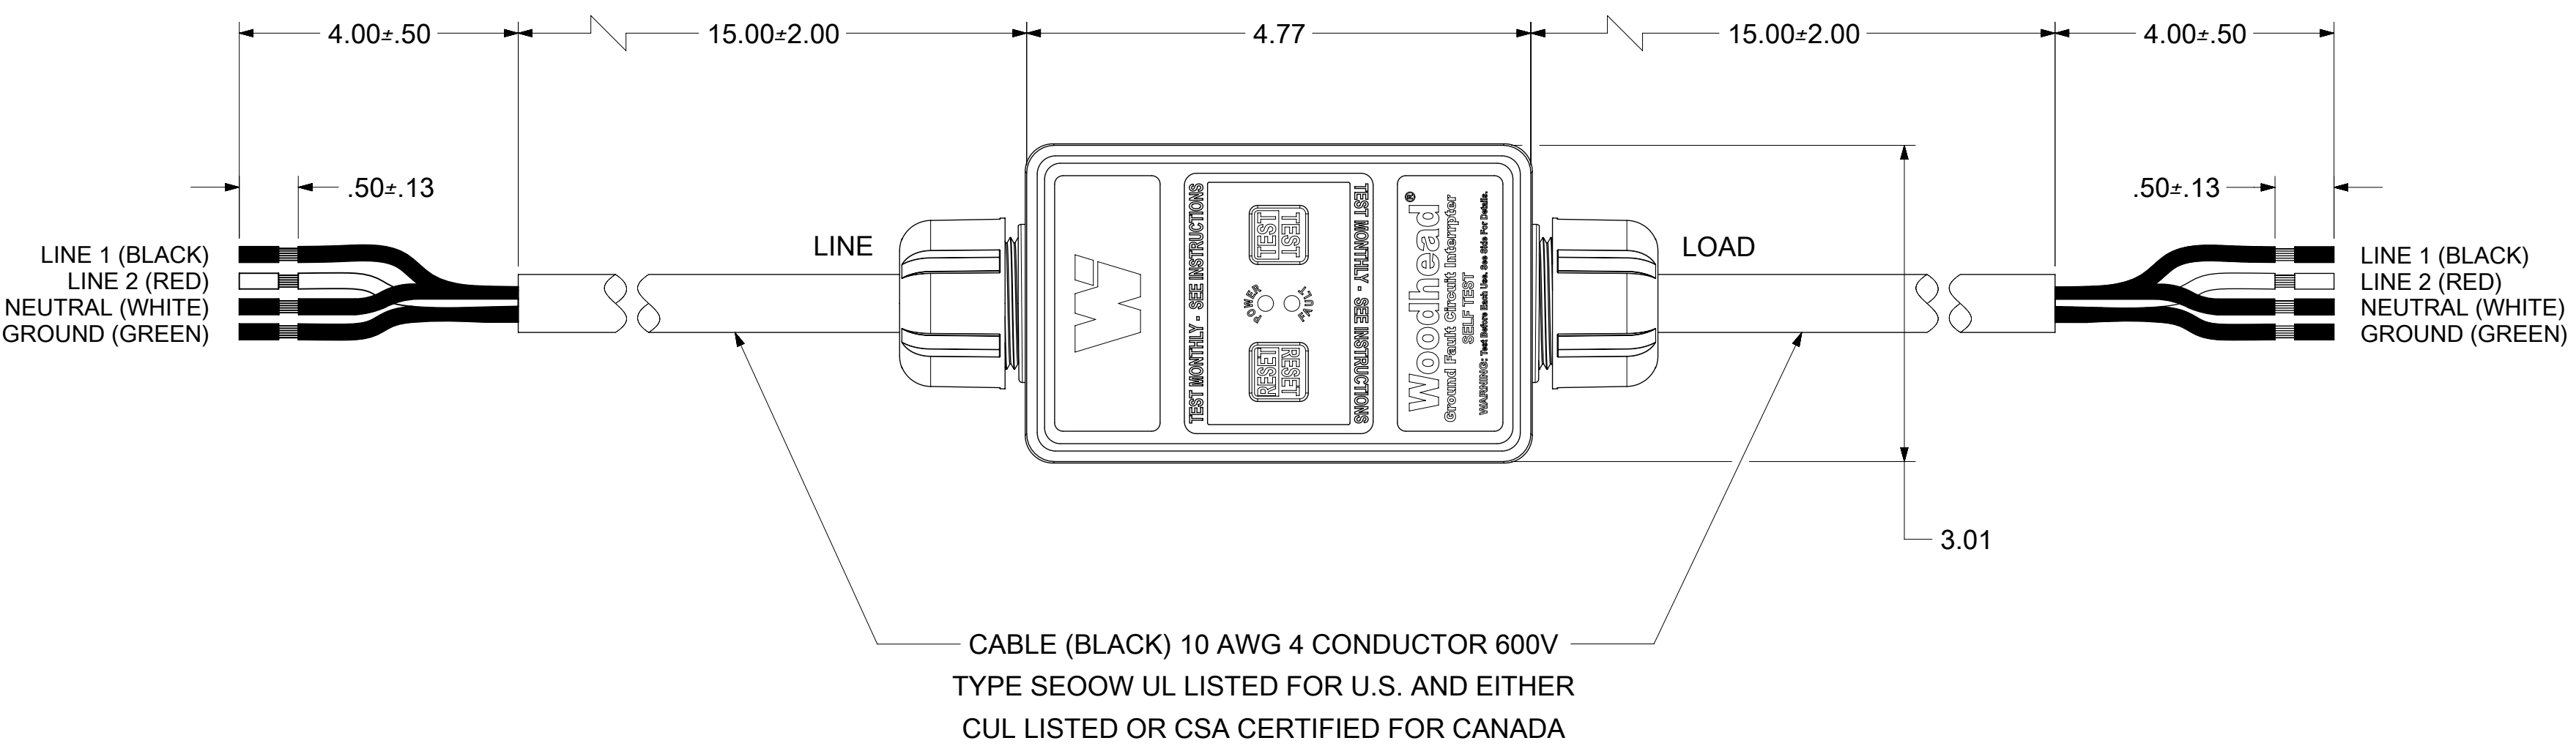

TECHNICAL

LISTED: UL & cCSAus
RATED SUPPLY VOLTAGE: 120/208VAC, 120/240VAC
RATED CURRENT: UP TO 30 AMPS
RESET TYPE: AUTOMATIC OR MANUAL
OPERATING FREQUENCY: 60 Hz
TYPE: CLASS A
GROUND TRIP CURRENT: 5mA +/- 1mA
OVERLOAD CURRENT: 180 AMPS, 0.45PF
INSULATION VOLTAGE: 1,500 VRMS - 1 MINUTE
ENDURANCE OPERATIONS: 3000 OPERATIONS
ENCLOSURE: NEMA 4X/6P (MULTIPHASE)

OLD DOCUMENT NO. SD-130153-040

RESET TYPE	MATERIAL NO.	ENGINEERING NO.	NORTH SHORE SAFETY NO	PHASE
MANUAL	1301530247	30053-0M6P	PGFI-C30AN	SPLIT PHASE
AUTOMATIC	1301530251	30053-0A6P	PGFI-C31AN	SPLIT PHASE

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION															
FUNCTIONAL SYMBOLS F A = 0 F C = 0 F P = 0 DIVISIONAL SYMBOLS	DIMENSION UNITS		SCALE		CURRENT REV DESC: UPDATED TO NEW GFCI VERSION.				molex 30A, 120/240VAC INLINE GFCI SPLIT PHASE #10/4 CABLE						
	INCH		NTS												
	GENERAL TOLERANCES (UNLESS SPECIFIED)														
			MM	INCH	EC NO: 788654 DRWN: PPURSUTANDEL 2024/05/30 CHK'D: DNGUYEN62 2024/06/11 APPR: HKNEELAND 2024/06/13				PRODUCT CUSTOMER DRAWING						
	4 PLACES		±	±											
	3 PLACES		±	±											
	2 PLACES		±	±											
	1 PLACE		±	±											
	0 PLACES		±	±	INITIAL REVISION: DRWN: PPURSUTANDEL 2021/07/21 APPR: HKNEELAND 2021/07/29				DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION		
	ANGULAR TOL		±	°					1301530247		PSD	000	C		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	
						C-SIZE		130153		SEE TABLE		GENERAL MARKET		1 OF 1	

[illegible]