


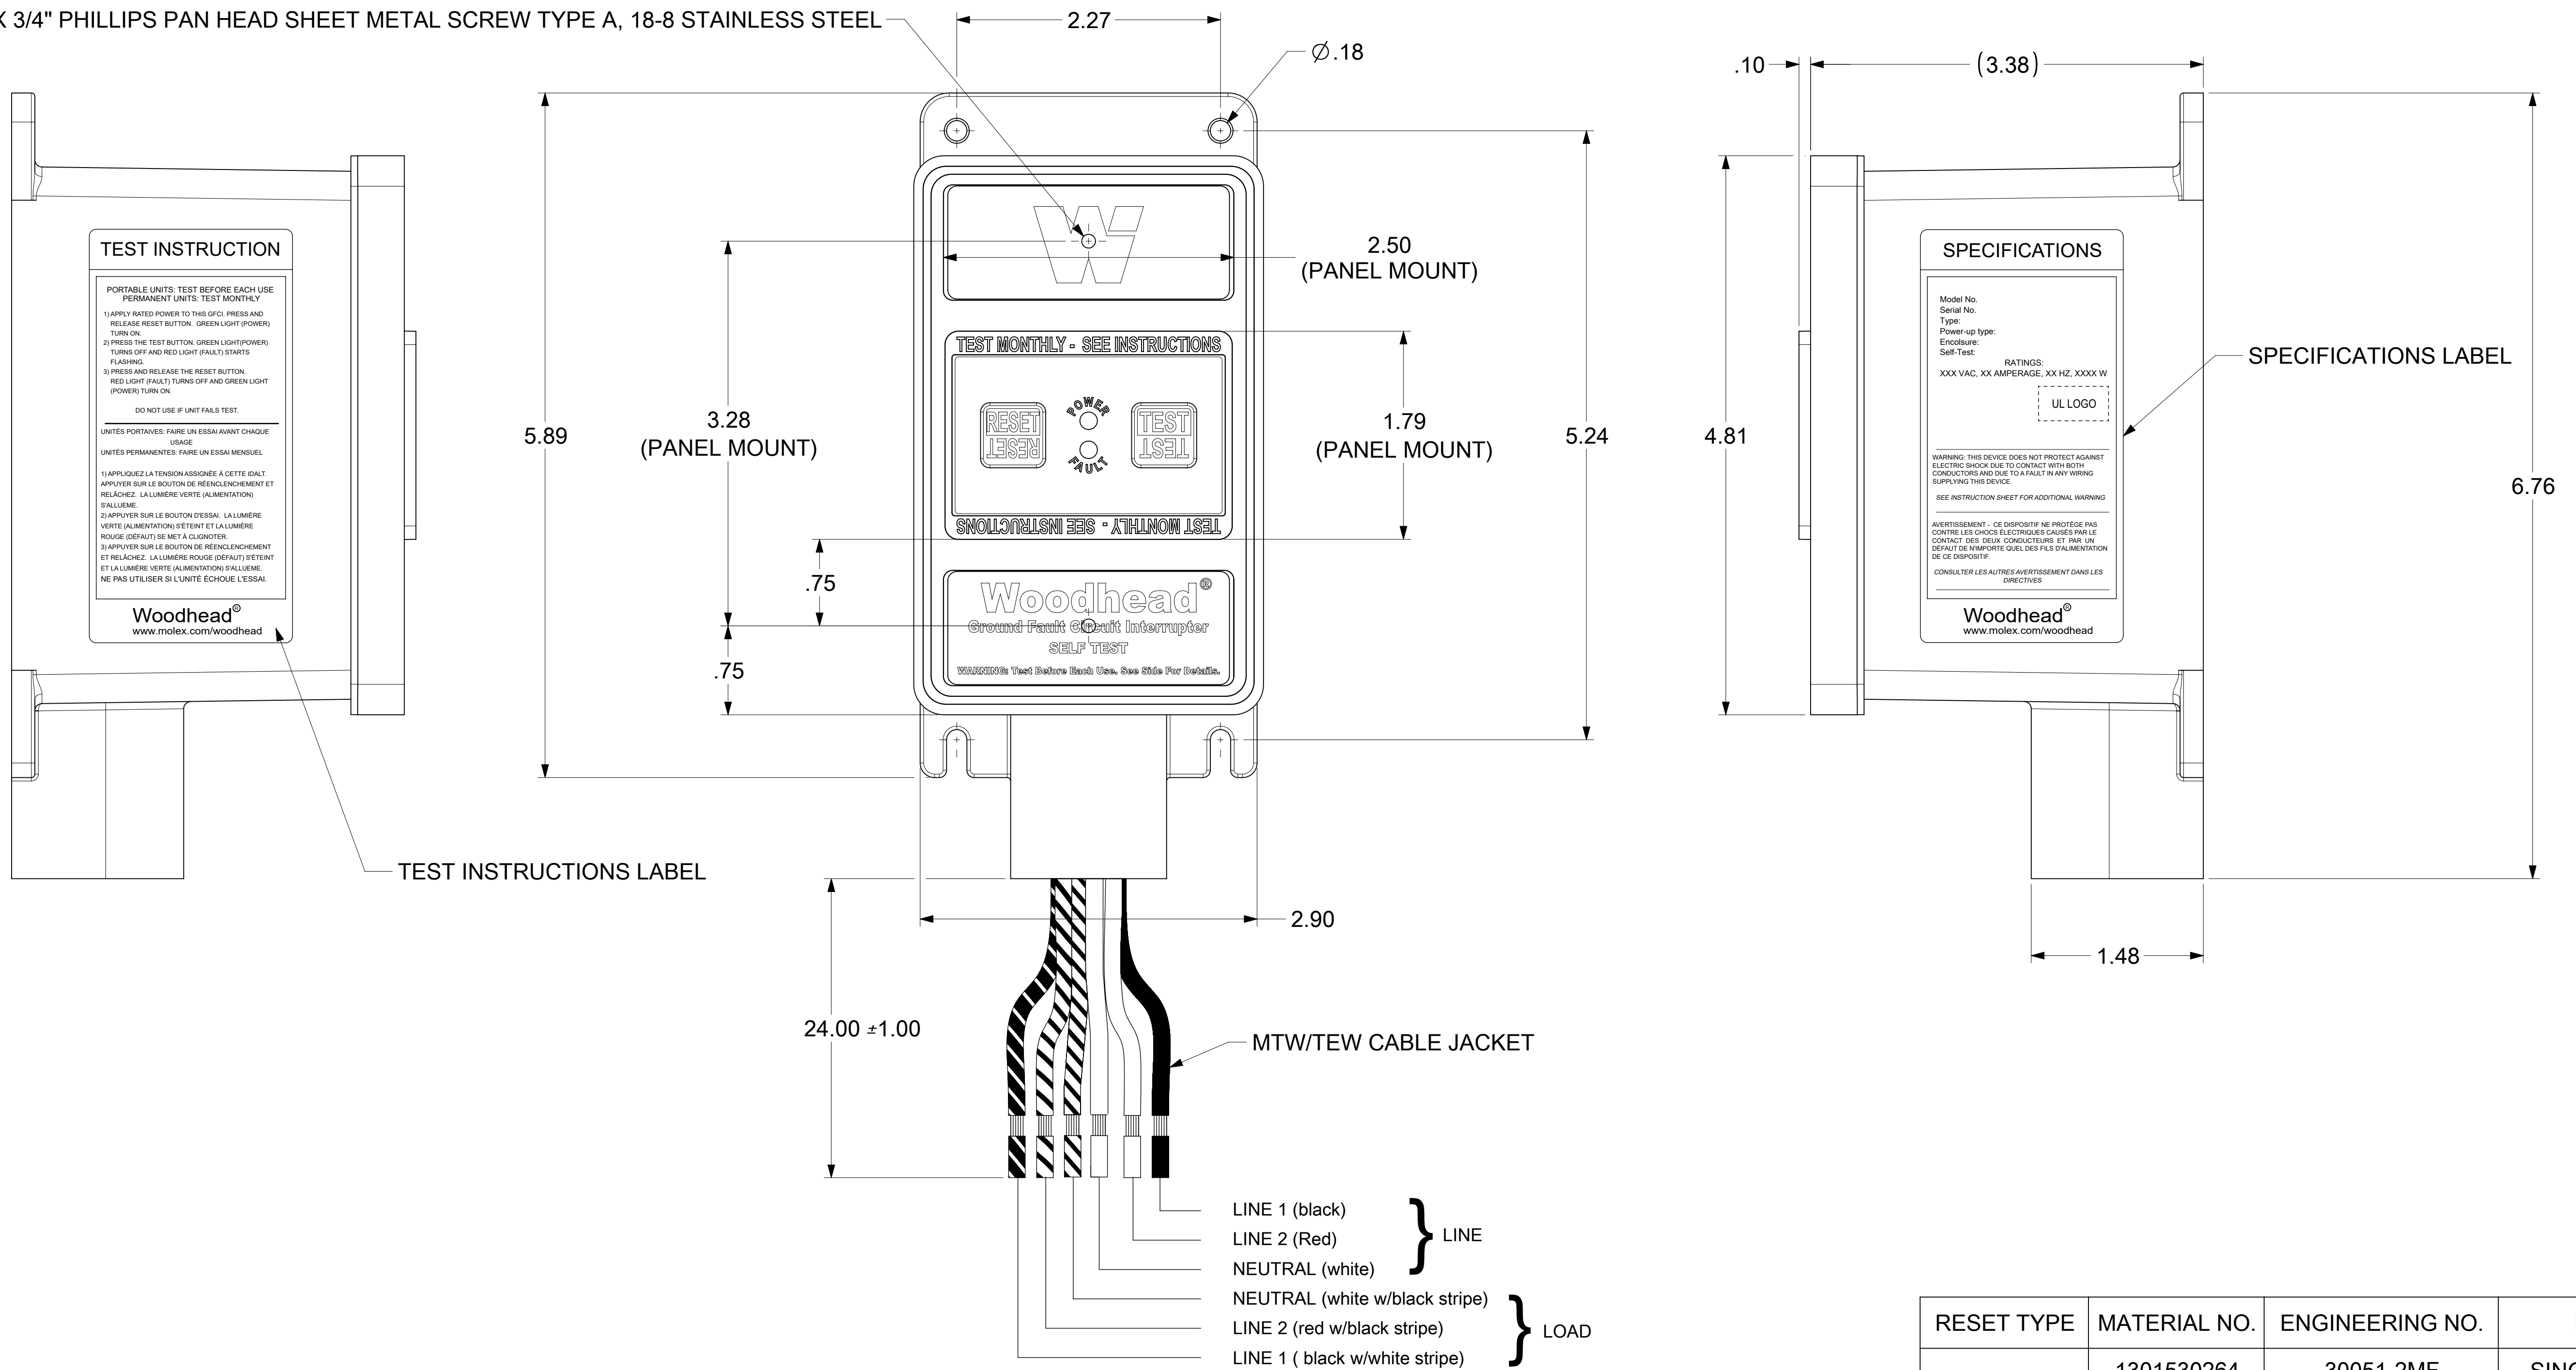

TECHNICAL

LISTED:	UL & CSA
RATED SUPPLY VOLTAGE:	240VAC
RATED CURRENT:	UP TO 30 AMPS
RESET TYPE:	AUTOMATIC OR MANUAL
OPERATING FREQUENCY:	60 Hz
TYPE:	CLASS A
GROUND TRIP CURRENT:	5mA +/- 1mA
OVERLOAD CURRENT:	180 AMPS, 0.45PF
INSULATION VOLTAGE:	1,500 VRMS - 1 MINUTE
ENDURANCE OPERATIONS:	3000 OPERATIONS
ENCLOSURE:	NEMA 4X/6P

RESET TYPE	MATERIAL NO.	ENGINEERING NO.	PHASE
MANUAL	1301530264	30051-2MF	SINGLE PHASE
	1301530266	30053-2MF	SINGLE PHASE
AUTOMATIC	1301530263	30051-2AF	SINGLE PHASE
	1301530265	30053-2AF	SINGLE PHASE

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										
	DIMENSION UNITS		SCALE		CURRENT REV DESC: UPDATED TO THE NEW GFCI VERSION.		molex				
	INCH		NTS								
	GENERAL TOLERANCES (UNLESS SPECIFIED)						30A 240VAC FIXED GFCI SINGLE PHASE #10AWG WIRE LEADS				
		MM	INCH								
	4 PLACES ±		±				EC NO: 788362 DRWN: PPURSUTANDEL 2024/05/29 CHK'D: DNGUYEN62 2024/06/06 APPR: HKNEELAND 2024/06/06		PRODUCT CUSTOMER DRAWING		
	3 PLACES ±		± 0.005								
	2 PLACES ± 0.13		± 0.01		INITIAL REVISION: DRWN: BARDEN 2014/04/25 APPR: JFMURPHY 2014/08/02		DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION
	1 PLACE ± 0.25		± 0.02				SD-130153-042		PSD	001	B
	0 PLACES ±		±		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER
ANGULAR TOL ± 0.5 °		THIRD ANGLE PROJECTION		SEE TABLE			GENERAL MARKET		1 OF 1		
DIVISIONAL SYMBOLS				DRAWING		SERIES					
				D-SIZE		130153					

DOCUMENT STATUS	P1	RELEASE DATE	2024/06/06	23:33:13
-----------------	----	--------------	------------	----------