


#6-18 X 3/4" PHILLIPS PAN HEAD SHEET METAL SCREW TYPE A, 18-8 STAINLESS STEEL

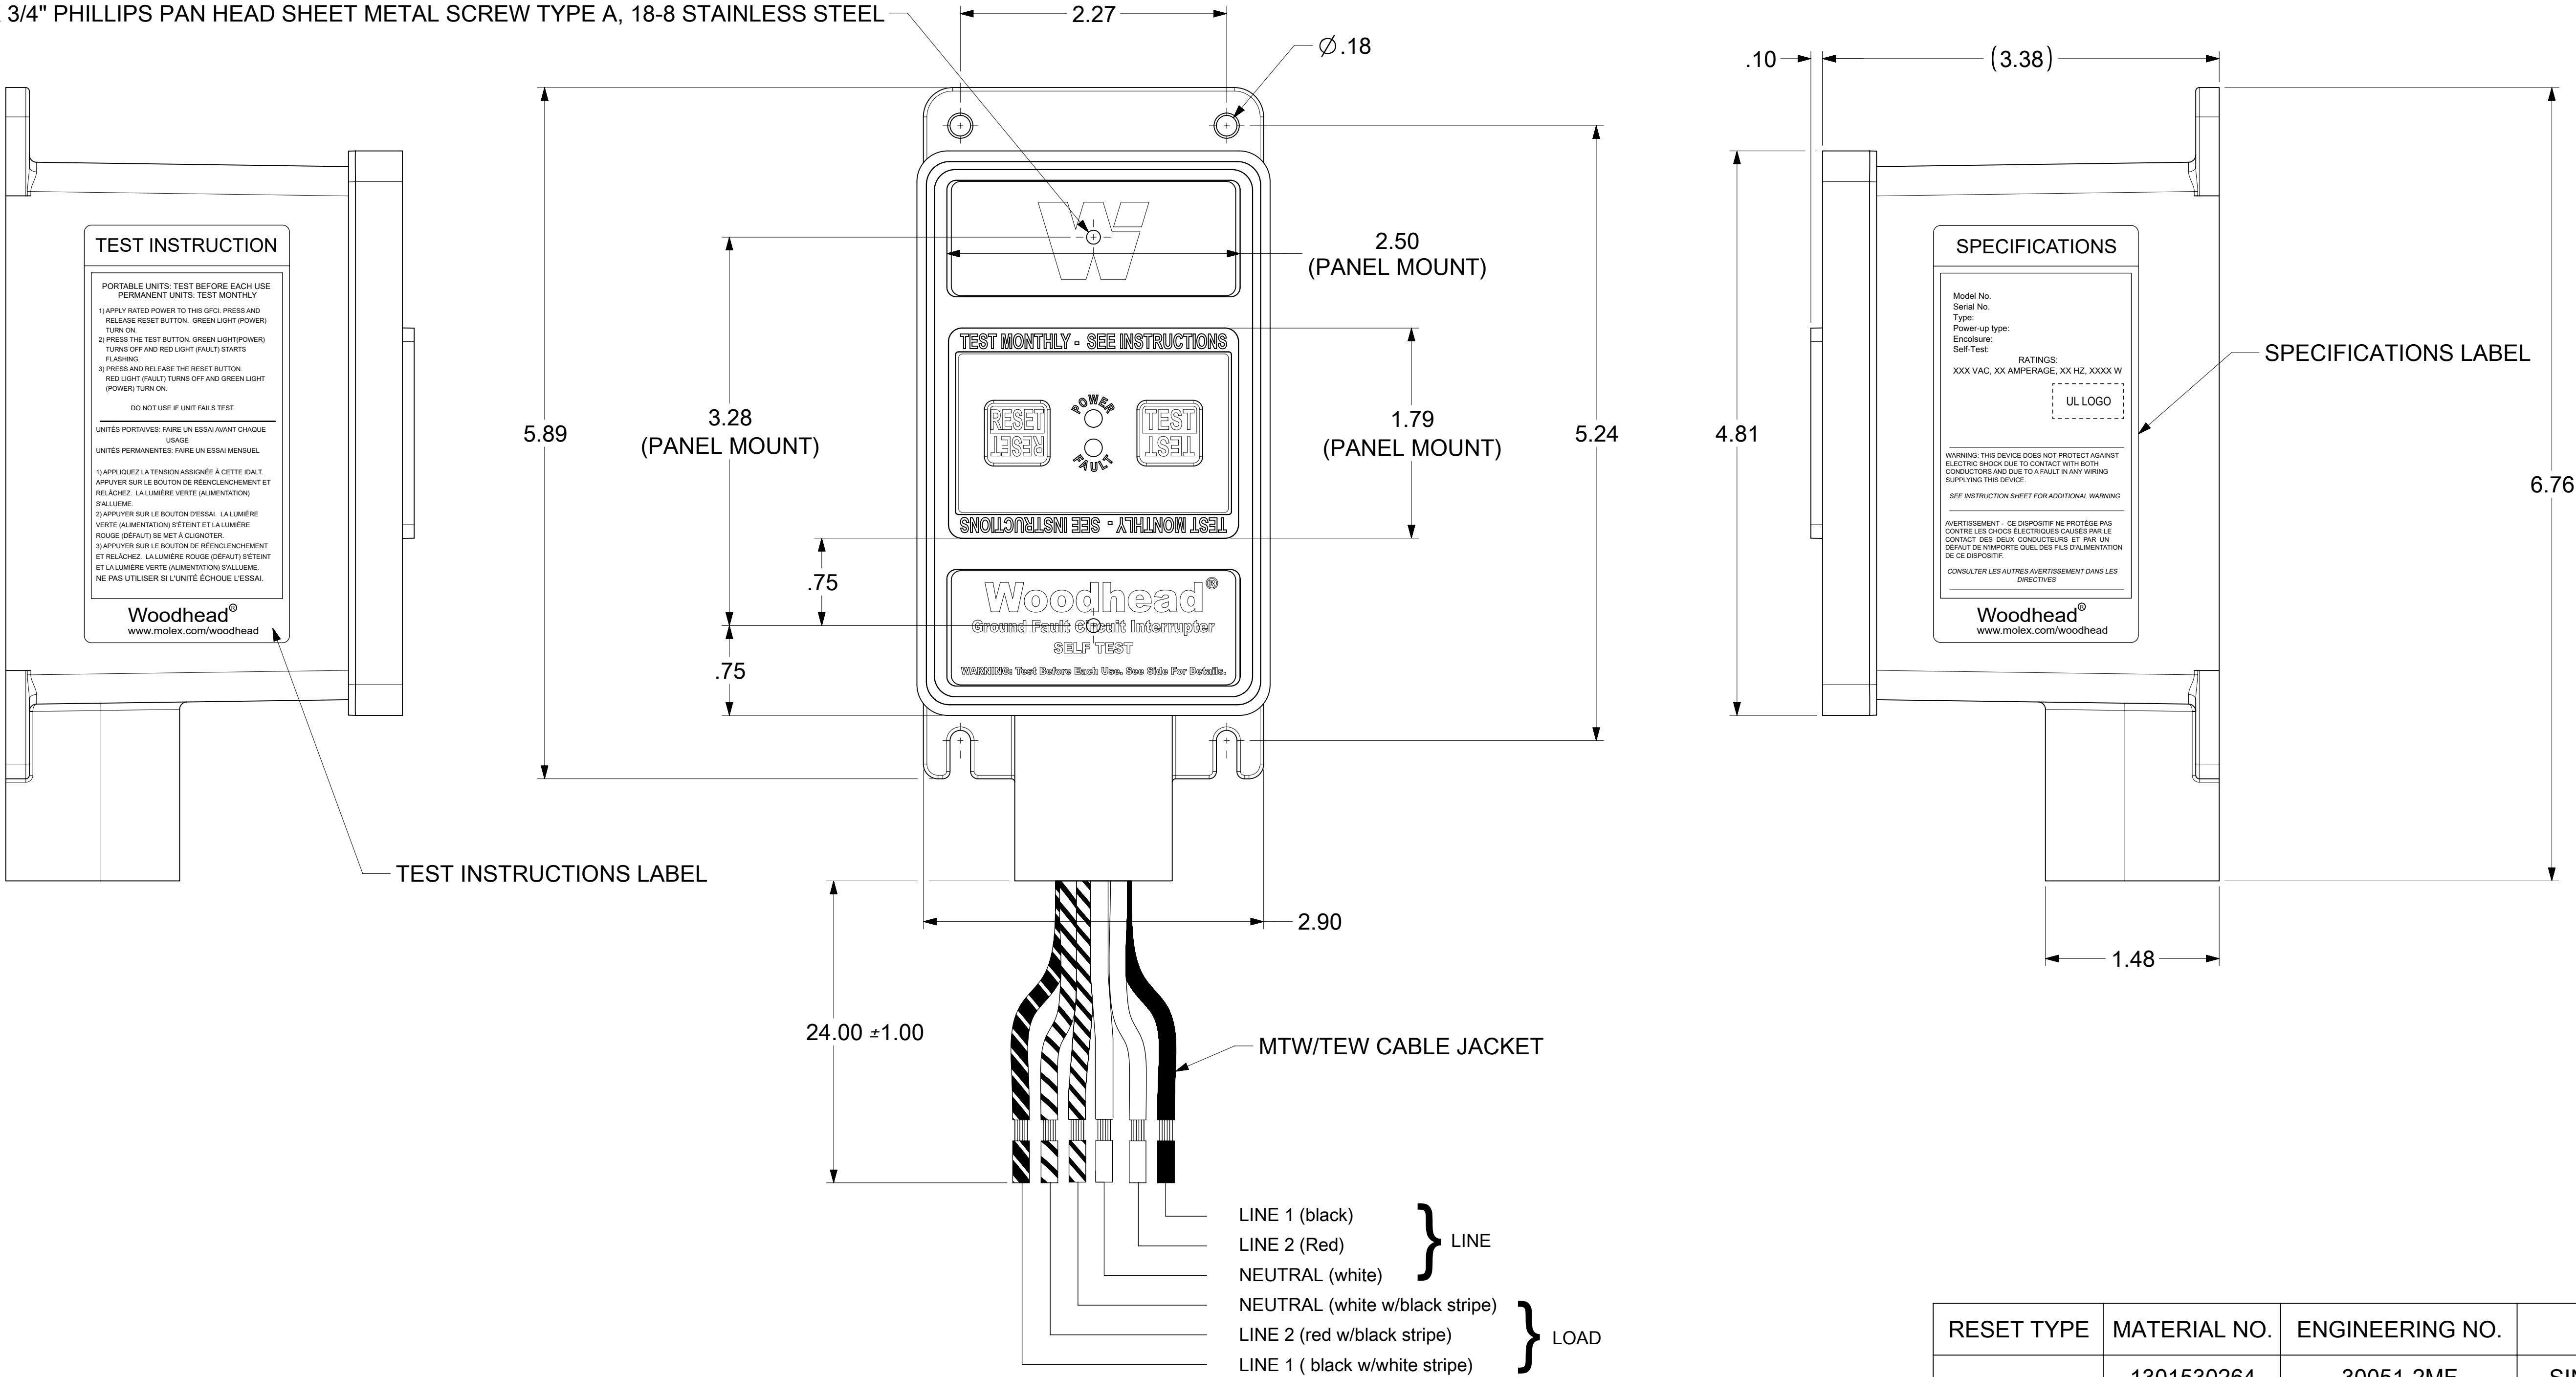

TECHNICAL

LISTED: UL & CSA
RATED SUPPLY VOLTAGE: 240VAC
RATED CURRENT: UP TO 30 AMPS
RESET TYPE: AUTOMATIC OR MANUAL
OPERATING FREQUENCY: 60 Hz
TYPE: CLASS A
GROUND TRIP CURRENT: 5mA +/- 1mA
OVERLOAD CURRENT: 180 AMPS, 0.45PF
INSULATION VOLTAGE: 1,500 VRMS - 1 MINUTE
ENDURANCE OPERATIONS: 3000 OPERATIONS
ENCLOSURE: NEMA 4X/6P

RESET TYPE	MATERIAL NO.	ENGINEERING NO.	PHASE
MANUAL	1301530264	30051-2MF	SINGLE PHASE
	1301530266	30053-2MF	SINGLE PHASE
AUTOMATIC	1301530263	30051-2AF	SINGLE PHASE
	1301530265	30053-2AF	SINGLE PHASE

FUNCTIONAL SYMBOLS EA = 0 EC = 0 EP = 0 DIVISIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				CURRENT REV DESC: UPDATED TO THE NEW GFCI VERSION.				molex 30A 240VAC FIXED GFCI SINGLE PHASE #10AWG WIRE LEADS								
	DIMENSION UNITS		SCALE		GENERAL TOLERANCES (UNLESS SPECIFIED)												
	INCH		NTS														
	MM		INCH														
	4 PLACES ±		±														
	3 PLACES ±		± 0.005														
	2 PLACES ±		0.13 ±		± 0.01		EC NO: 788362 DRWN: PPURSUTANDEL 2024/05/29 CHK'D: DNGUYEN62 2024/06/06 APPR: HKNEELAND 2024/06/06										
	1 PLACE ±		0.25 ±		± 0.02		INITIAL REVISION:										
	0 PLACES ±		±		±		DRWN: BARDEN 2014/04/25 APPR: JFMURPHY 2014/08/02										
	ANGULAR TOL		± 0.5 °														
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES		DOCUMENT NUMBER		DOC TYPE		DOC PART		REVISION	
						D-SIZE		130153		SD-130153-042		PSD		001		B	
										SEE TABLE		GENERAL MARKET				SHEET NUMBER 1 OF 1	