


#6-18 X 3/4" PHILLIPS PAN HEAD SHEET METAL SCREW TYPE A, 18-8 STAINLESS STEEL

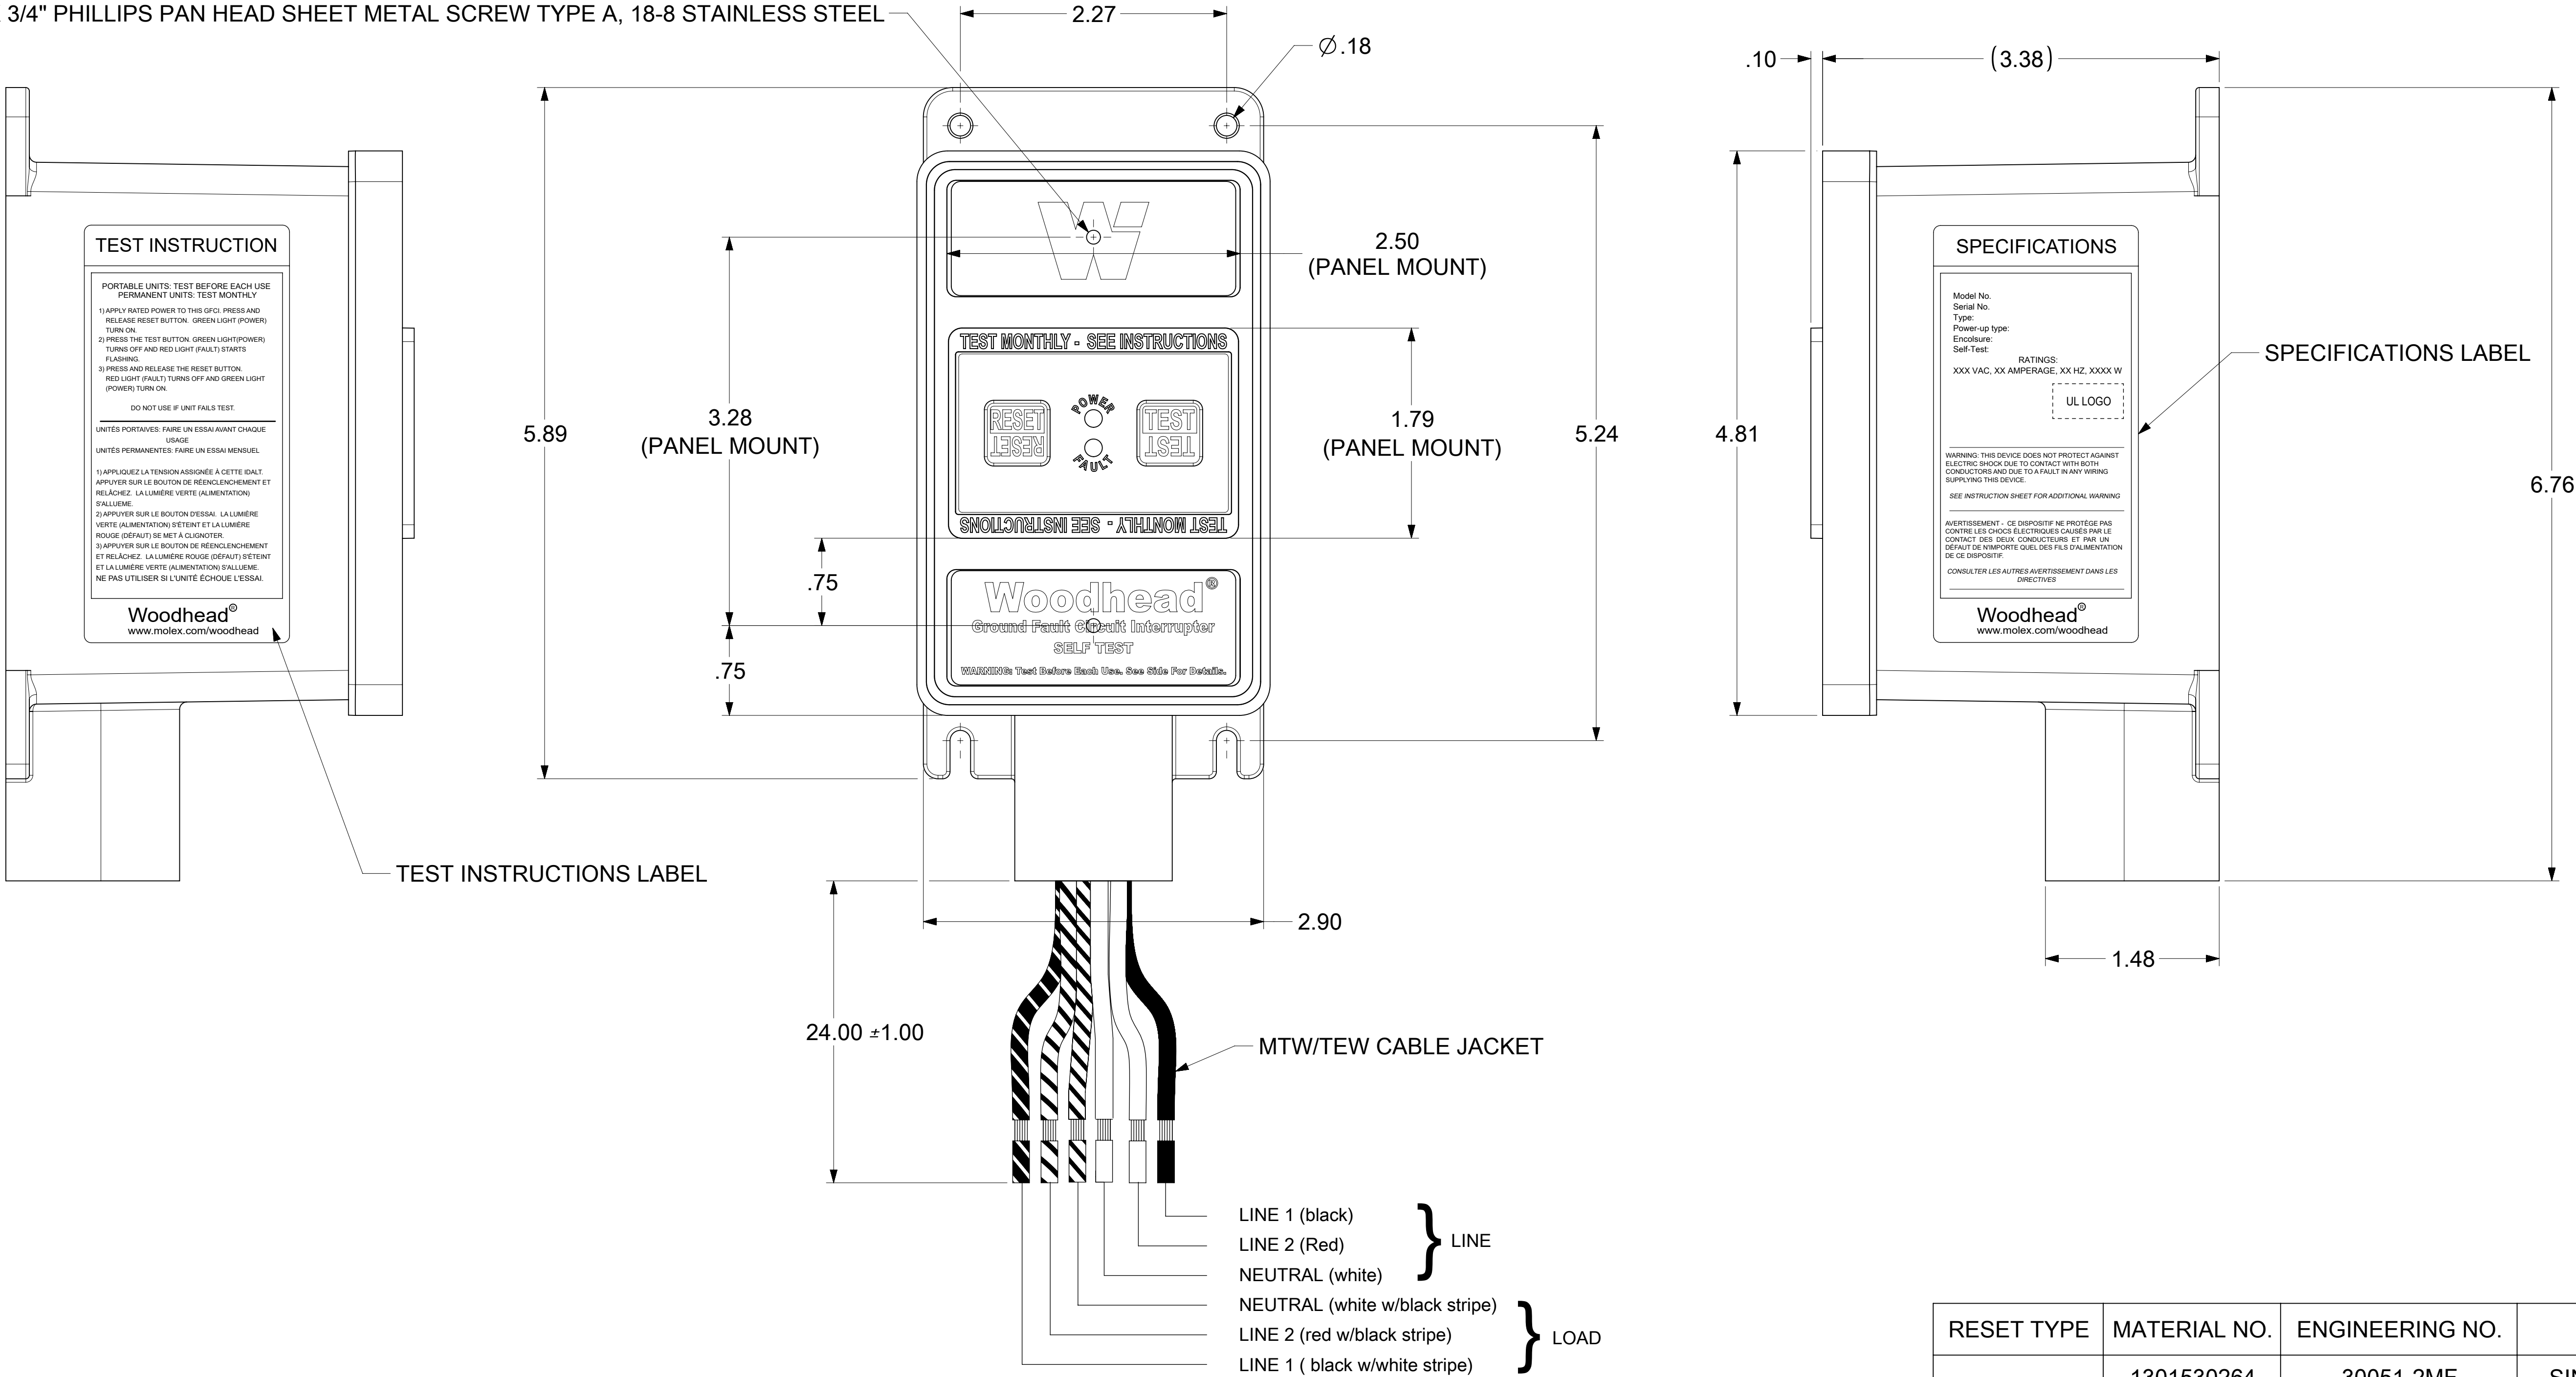

TECHNICAL

LISTED:	UL & CSA
RATED SUPPLY VOLTAGE:	240VAC
RATED CURRENT:	UP TO 30 AMPS
RESET TYPE:	AUTOMATIC OR MANUAL
OPERATING FREQUENCY:	60 Hz
TYPE:	CLASS A
GROUND TRIP CURRENT:	5mA +/- 1mA
OVERLOAD CURRENT:	180 AMPS, 0.45PF
INSULATION VOLTAGE:	1,500 VRMS - 1 MINUTE
ENDURANCE OPERATIONS:	3000 OPERATIONS
ENCLOSURE:	NEMA 4X/6P

RESET TYPE	MATERIAL NO.	ENGINEERING NO.	PHASE
MANUAL	1301530264	30051-2MF	SINGLE PHASE
	1301530266	30053-2MF	SINGLE PHASE
AUTOMATIC	1301530263	30051-2AF	SINGLE PHASE
	1301530265	30053-2AF	SINGLE PHASE

FUNCTIONAL SYMBOLS = 0 = 0 = 0 DIVISIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION												
	DIMENSION UNITS		SCALE		CURRENT REV DESC: UPDATED TO THE NEW GFCI VERSION.			molex 30A 240VAC FIXED GFCI SINGLE PHASE #10AWG WIRE LEADS					
	INCH		NTS										
	GENERAL TOLERANCES (UNLESS SPECIFIED)												
	MM		INCH		EC NO: 788362 DRWN: PPURSUTANDEL 2024/05/29 CHK'D: DNGUYEN62 2024/06/06 APPR: HKNEELAND 2024/06/06			PRODUCT CUSTOMER DRAWING					
	4 PLACES ± ±		± ±										
	3 PLACES ± ±		± 0.005										
	2 PLACES ± 0.13 ± 0.01		1 PLACE ± 0.25 ± 0.02		INITIAL REVISION: DRWN: BARDEN 2014/04/25 APPR: JFMURPHY 2014/08/02			DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION	
	0 PLACES ± ±		ANGULAR TOL ± 0.5 °					SD-130153-042		PSD	001	B	
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS							THIRD ANGLE PROJECTION		DRAWING	SERIES	MATERIAL NUMBER	
				D-SIZE		130153		SEE TABLE		GENERAL MARKET		1 OF 1	