
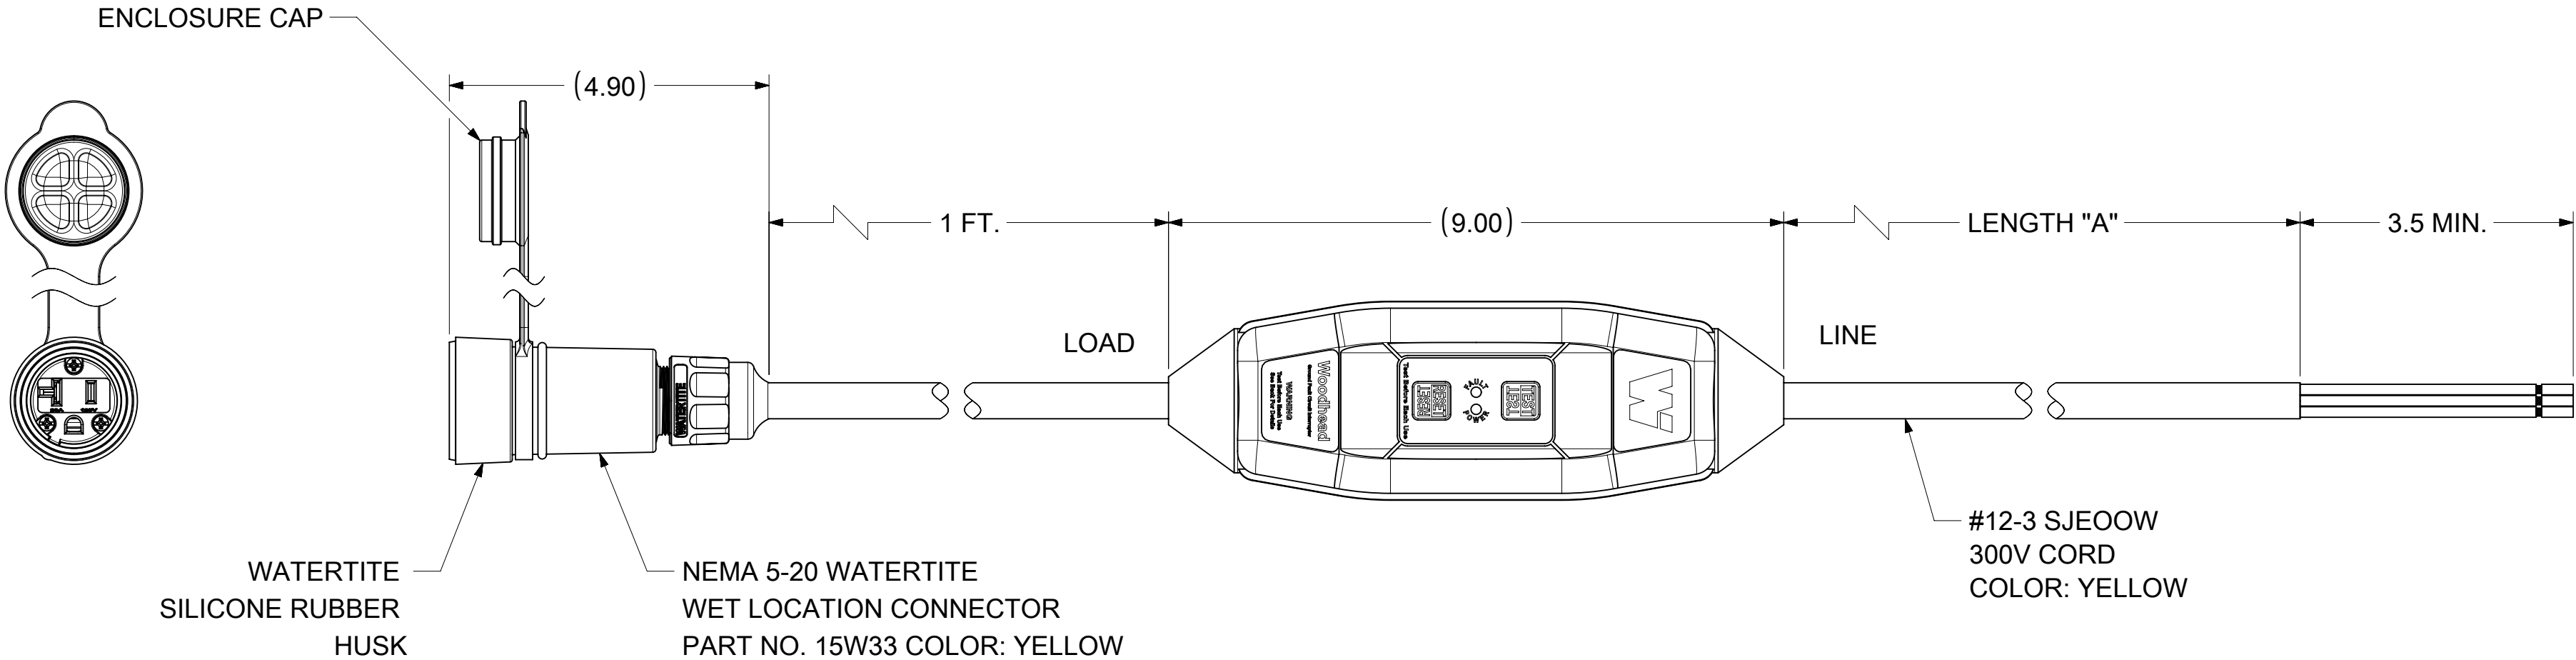


SPECIFICATION LABEL

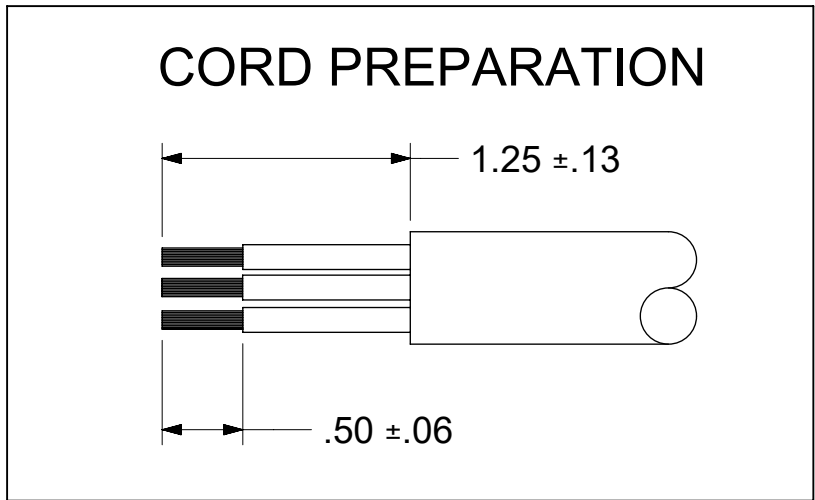

TECHNICAL
AGENCY APPROVAL: cURus
RATED SUPPLY VOLTAGE: 120VAC
RATED CURRENT: UP TO 20 AMPS
RESET TYPE: AUTO OR MANUAL
OPERATING FREQUENCY: 60 Hz
TYPE: CLASS A
GROUND TRIP CURRENT: 5mA +/- 1mA
OVERLOAD CURRENT: 120 AMPS, 50% INDUCTIVE
INSULATION VOLTAGE: 1,500 VRMS - 1 MINUTE
ENDURANCE OPERATIONS: 3000 OPERATIONS
ENCLOSURE: TYPE 4X, IP69, IP69K

MATERIAL NO.	ENGINEERING NO.	LENGTH "A"	POWER UP
1301530278	20052-0PM18	17 FT +4 IN/-0 IN	MANUAL
1301530280	20052-0PM30	30 FT +6 IN/-0 IN	MANUAL
1301530281	20052-0PM45	45 FT +12 IN/-0 IN	MANUAL
1301530282	20052-0PM60	60 FT +12 IN/-0 IN	MANUAL

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																		
	DIMENSION UNITS		SCALE		CURRENT REV DESC: MIGRATION TO ECTR/NX					molex 120 VAC 20A IN-LINE GFCI MANUAL 17' FLYING LEADS 1' SECONDARY NEMA 5-20									
	INCH		NTS																
	GENERAL TOLERANCES (UNLESS SPECIFIED)									EC NO: 780725 DRWN: PPURSUTANDEL 2023/08/03 CHK'D: DNGUYEN62 2024/03/20 APPR: HKNEELAND 2024/03/22 INITIAL REVISION: DRWN: BPATTERS 2018/03/20 APPR: HKNEELAN 2018/03/28					PRODUCT CUSTOMER DRAWING		DOCUMENT NUMBER SD-130153-278		DOC TYPE PSD
ANGULAR TOL ± 0.5°																			
4 PLACES		±																	
3 PLACES		±																	
DIVISIONAL SYMBOLS	2 PLACES		±																
	1 PLACE		±																
	0 PLACES		±																
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS					THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER			
							C-SIZE		130153		SEE TABLE		GENERAL MARKET		1 OF 1				

DOCUMENT STATUS	P1	RELEASE DATE	2024/03/22	16:07:44
-----------------	----	--------------	------------	----------