


SPECIFICATION LABEL

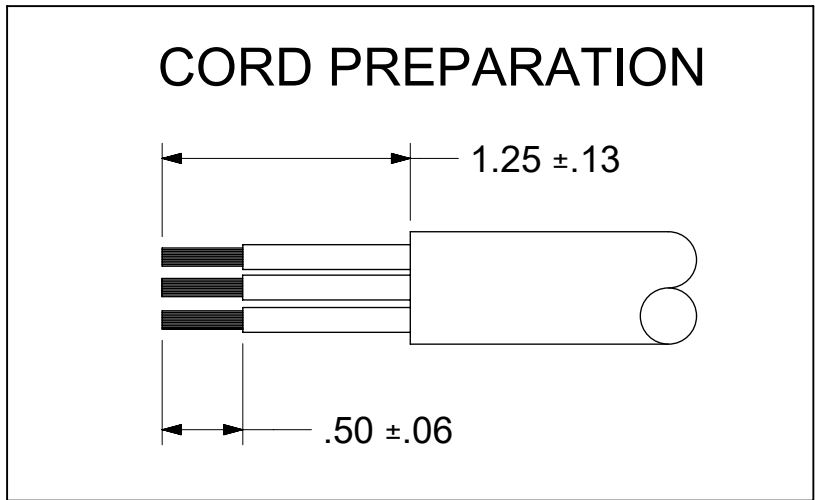

TECHNICAL

AGENCY APPROVAL: cURus
RATED SUPPLY VOLTAGE: 120VAC
RATED CURRENT: UP TO 20 AMPS
RESET TYPE: AUTO OR MANUAL
OPERATING FREQUENCY: 60 Hz
TYPE: CLASS A
GROUND TRIP CURRENT: 5mA +/- 1mA
OVERLOAD CURRENT: 120 AMPS, 50% INDUCTIVE
INSULATION VOLTAGE: 1,500 VRMS - 1 MINUTE
ENDURANCE OPERATIONS: 3000 OPERATIONS
ENCLOSURE: TYPE 4X, IP69, IP69K

MATERIAL NO.	ENGINEERING NO.	LENGTH "A"	POWER UP
1301530278	20052-0PM18	17 FT +4 IN/-0 IN	MANUAL
1301530280	20052-0PM30	30 FT +6 IN/-0 IN	MANUAL
1301530281	20052-0PM45	45 FT +12 IN/-0 IN	MANUAL
1301530282	20052-0PM60	60 FT +12 IN/-0 IN	MANUAL

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION														
DIVISIONAL SYMBOLS	DIMENSION UNITS		SCALE		CURRENT REV DESC: MIGRATION TO ECTR/NX				<div>molex</div> <div>120 VAC 20A IN-LINE GFCI MANUAL 17' FLYING LEADS 1' SECONDARY NEMA 5-20</div>						
	INCH		NTS												
	GENERAL TOLERANCES (UNLESS SPECIFIED)														
	ANGULAR TOL ± 0.5 °				EC NO: 780725				PRODUCT CUSTOMER DRAWING						
	4 PLACES		±		DRWN: PPURSUTANDEL 2023/08/03										
	3 PLACES		±		CHK'D: DNGUYEN62 2024/03/20										
	2 PLACES		±		APPR: HKNEELAND 2024/03/22										
	1 PLACE		±		INITIAL REVISION:										
0 PLACES		±		DRWN: BPATTERS 2018/03/20											
				APPR: HKNEELAN 2018/03/28				DOCUMENT NUMBER		DOC TYPE		DOC PART		REVISION	
								SD-130153-278		PSD		001		D	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	
						C-SIZE		130153		SEE TABLE		GENERAL MARKET		1 OF 1	

DOCUMENT STATUS	P1	RELEASE DATE	2024/03/22	16:07:44
-----------------	----	--------------	------------	----------